



Earto M810 Bluetooth Keyboard and Mouse Instruction Manual

[Home](#) » [earto](#) » Earto M810 Bluetooth Keyboard and Mouse Instruction Manual 

Earto M810 Bluetooth Keyboard and Mouse



Contents

[1 SETTING UP YOUR KEYBOARD](#)

[2 SETTING UP YOUR MOUSE](#)

[3 How to switch between the connected devices:](#)

[4 Power Saving Mode](#)

[5 Troubleshooting](#)

[6 Keys and Functions](#)

[7 If connection failure, please follow below steps:](#)

[8 Indicator Light and Buttons](#)

[9 Documents / Resources](#)

[9.1 References](#)


[10 Related Posts](#)

SETTING UP YOUR KEYBOARD

Connect devices using the USB receiver:


STEP1

Find the USB receiver in your keyboard box, and insert it into the USB port of the devices.

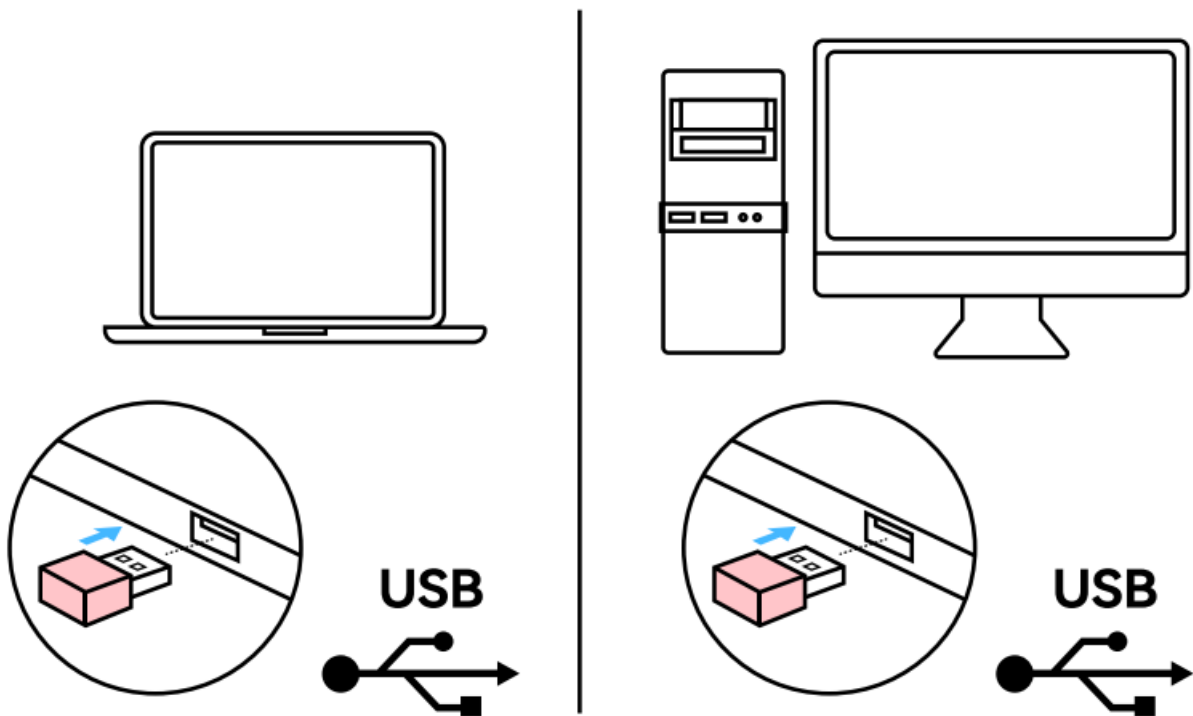



STEP2

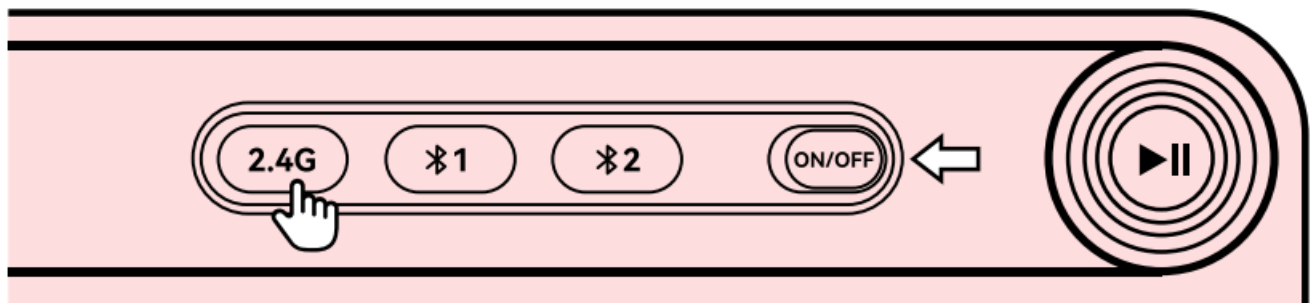
Switch the ON/OFF switch to ON position and press the 2.4G button for once to finish the connecting.



Connect devices through the Bluetooth


STEP1

Switch the ON/OFF switch to ON position and Long press (3 seconds) the  ₁ /  ₂ buttons to enter Pairing Mode. The Corresponding LED lights below will start bilking.

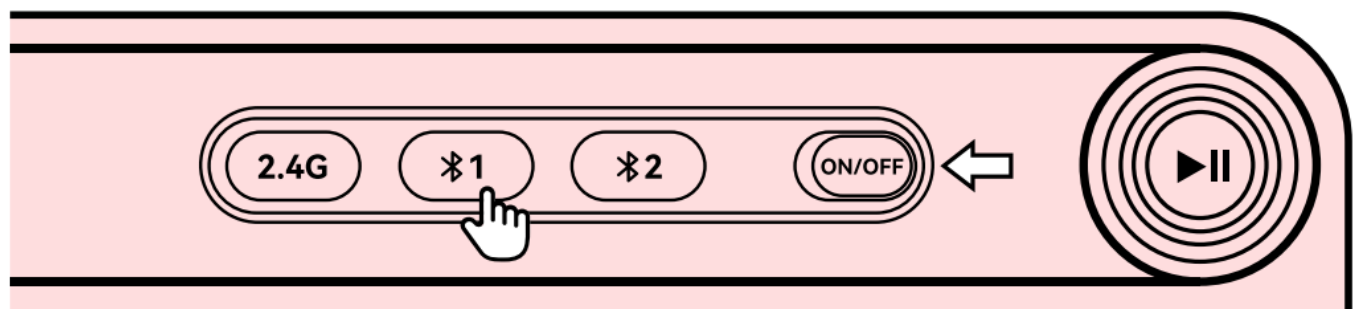

STEP2

Open Bluetooth preferences on your computer, phone or tablet. Select "BT5.0 KB" on the list of devices to finish connecting.

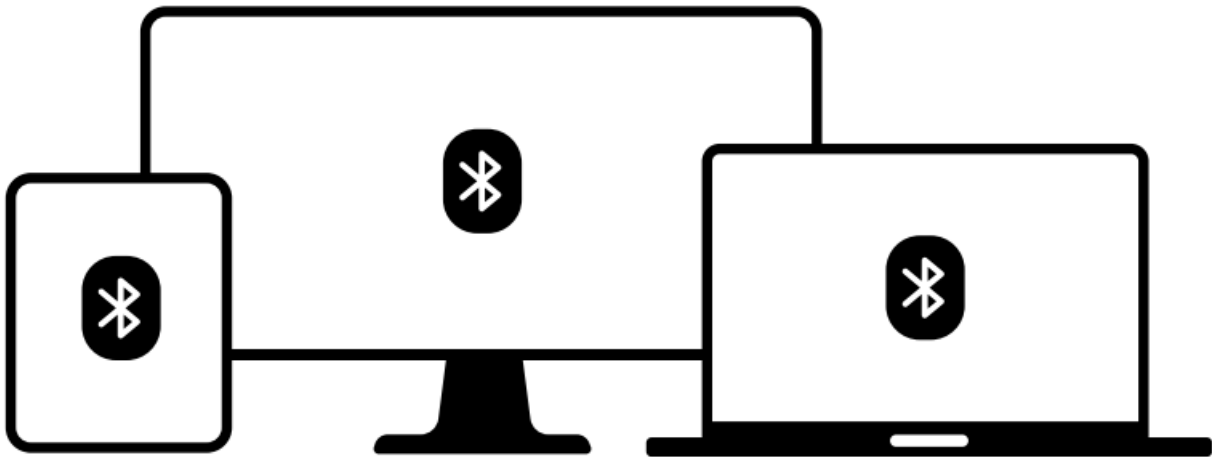


SETTING UP YOUR MOUSE

Connect devices using the USB receiver:

STEP1

Find the USB receiver in your keyboard box, and insert it into the USB port of the devices.

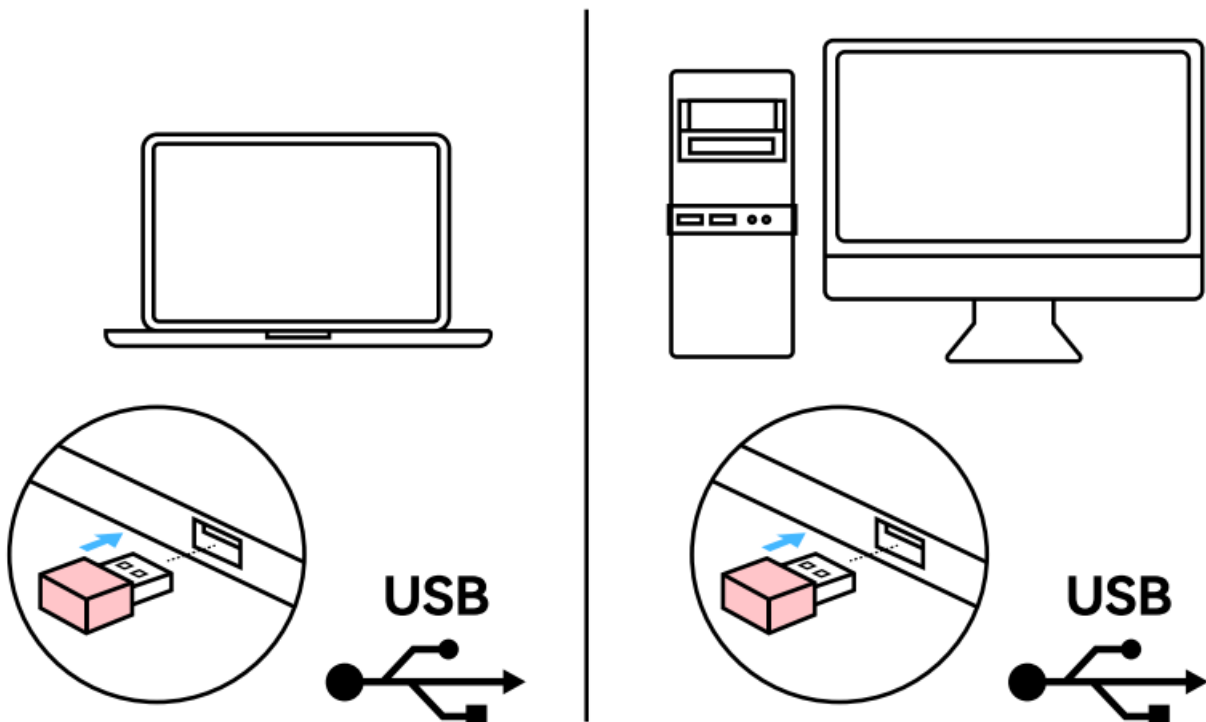





STEP2


Switch the ON/OFF switch to ON position and Click the button shown in the above figure until the indicator light lights up at 2.4G position to finish the connecting.

Connect devices through the Bluetooth:

STEP1


Switch the ON/OFF switch to ON position and Click the button shown in the above figure until the indicator light

lights up at   position and Long press(3 seconds) the   buttons to enter Pairing Mode. The Corresponding LED lights below will start blinking.

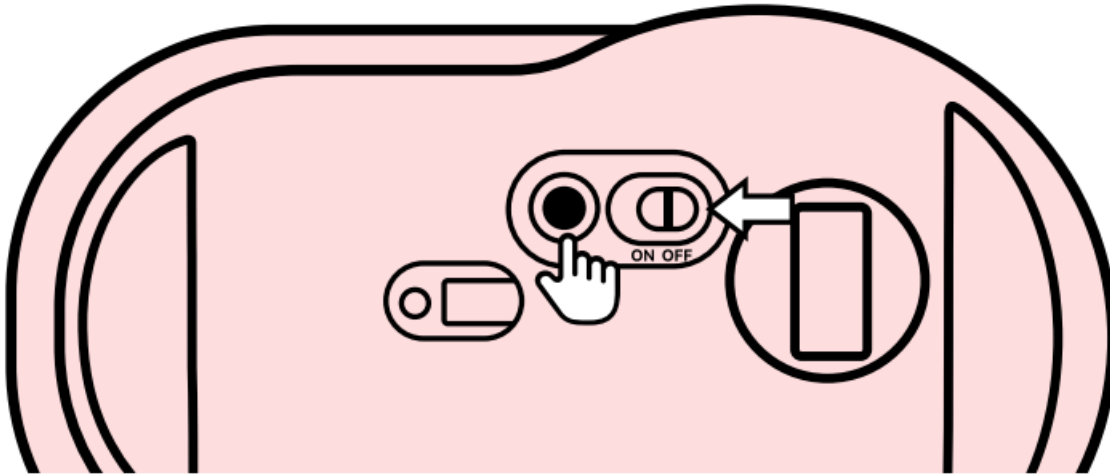



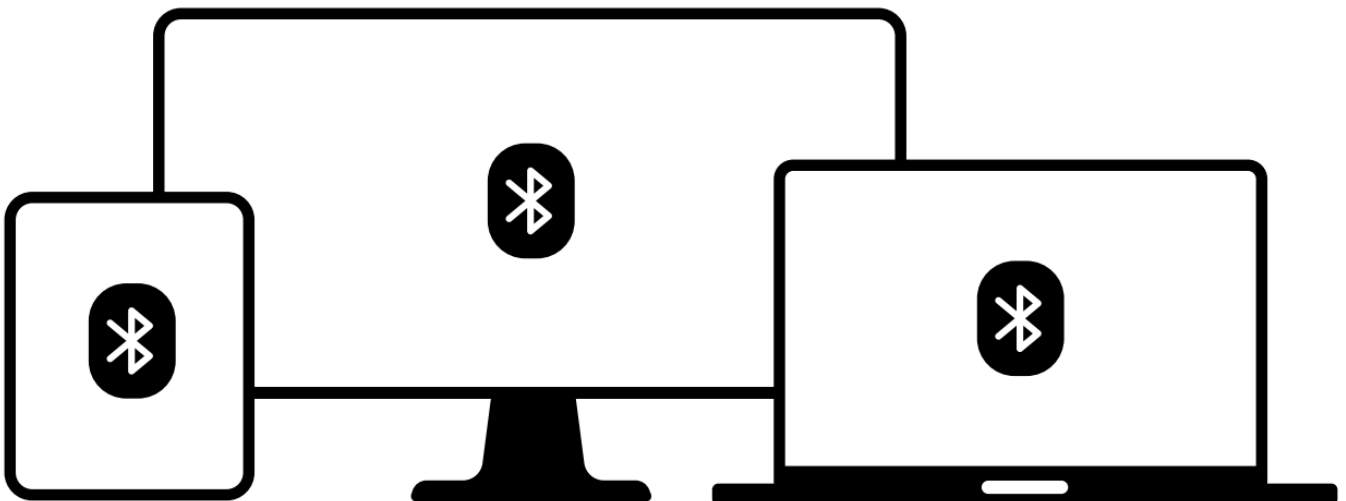

STEP2

Open Bluetooth preferences on your computer, phone or tablet. Select "BTS.0 Mouse" 'on the list of devices to finish connecting.







How to switch between the connected devices:

Keyboard switching:

1. When you need to switch to your computer with 2.4GHz adapter, press the "2.4G" button at the top right right corner of the keyboard.
2. When you need to switch to your device with   connection, press the   button on the top right corner of the keyboard.

Mouse switching:

1. When you need to switch to computer with "2.4GHz" adapter, press the button at the bottom of the mouse to make the "2.4GHz red light blink, the mouse will be connected with your computer.

2. When you need to switch to your device with ₁ / ₂ connection, press the button at the bottom of the mouse so that the mouse will be connected to your device when the ₁ / ₂ light flashes.

Power Saving Mode

When the keyboard is not operated within 3 seconds, it will automatically enter the sleep mode. To wake up the keyboard, press any key and wait for 2-3 seconds, it will automatically connect to the device.

Troubleshooting


If you are unable to connect to the device.

1. Make sure the switch is turned on.
2. Make sure that the 2.4G USB receiver is plugged into the USB port of your computer.
3. Make sure the device has enough power.
4. Make sure the keyboard is in operating range.


Keys and Functions

When you need to use the shortcut keys, press the “Fn” key in the same row.

MAC:

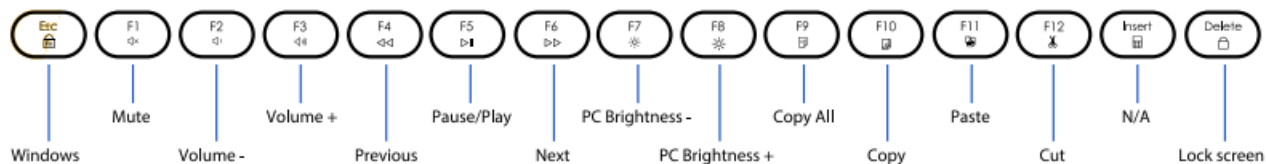

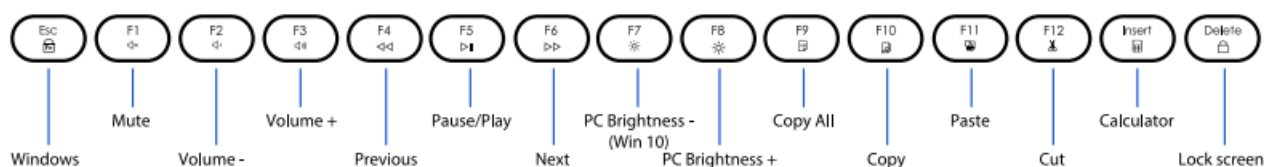

Windows:



If connection failure, please follow below steps:

Keyboard re-pairing:

Step 1. Turn on the keyboard, press “ + ” to restore the factory settings. Two blue lights flash three times and then one blue light flashes.

Step 2. Press “ + ”, the blue light will flash quickly.

Step 3. Plug the 2.4G USB receiver into the computer and keep the keyboard within 30cm (0.98ft) of the receiver within 10 seconds.

Mouse re-pairing:

Step 1. Turn off the mouse and plug out the 2.4G USB receiver.


Step 2. Hold down the "Left button, Wheel button and Right button" together for 3s, and then turn on the mouse.

Step 3. Insert the receiver into the computer within 10s, get the mouse close to the receiver within 30cm (0.98 feet).

Indicator Light and Buttons

1. Caps Lock/2.4GHz Indicator

The Caps Lock indicator will turn green when Caps Lock is activated. A blue light will flash when pairing via 2.4GHz receiver.

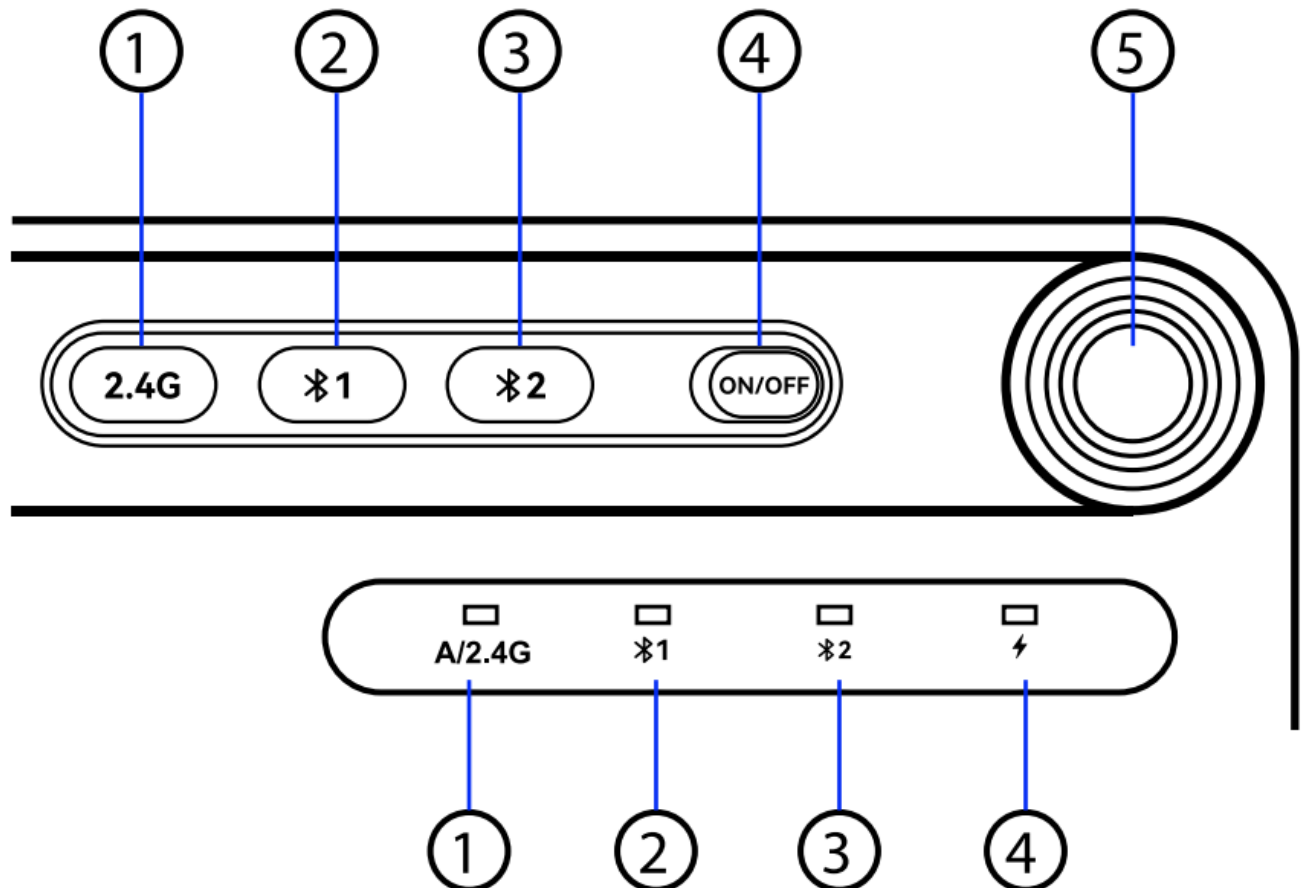

2. BT 1 Indicator

The blue light will flash slowly for 3 seconds and then go out.

Switching channels, the blue light will flash quickly when pairing.

3. BT 2 Indicator

The blue light will flash slowly for 3 seconds and then go out.

Switching channels, the blue light will flash quickly when pairing.

4. Power Indicator

Red light is on when charging, red light is off when full.

5. Volume Button

Clockwise: volume up+ Counterclockwise: volume down – Click: Play/ Pause

NOTE: The connection indicator of the keyboard will flash every 3 seconds in order to remind you which connection way is using.

If your keyboard typing delay, does not work.

1. Make sure there is no 2.4G device (such as a router) nearby to interfere with the connection.
2. Make sure that the keyboard battery has power.
3. Make sure there are no full metal chassis signals that may be blocked.
4. the computer is running too many tasks and the CPU memory is not full enough to handle the signal from the receiver.

If the mouse does not work, the delay is obvious.

1. Please carefully check the battery of the mouse.
2. If your computer is connected to a wired mouse at the same time, please unplug it. Otherwise it may cause a working driver conflict.
3. Make sure your mouse is not used on materials with good light-transmitting media such as glass (the mouse uses diodes for positioning, and glass and other materials will make the positioning inaccurate and delayed).


If the Shortcut Keys is not functional.

1. Press the "**Fn**" Key on the same row to lock/unlock the shortcut keys function.
2. When the shortcut keys function is off, please press the "**Fn**" key and the required function key together.
3. When the shortcut keys function is on, press the keys you need to use directly.

Note:

1. The F1-F12 keys is not available in MacOS
2. The brightness control shortcut keys are not available in Windows 7 OS.

Documents / Resources

	<p>Earto M810 Bluetooth Keyboard and Mouse [pdf] Instruction Manual M810, 8810-PK-US, M810 Bluetooth Keyboard and Mouse, M810, Bluetooth Keyboard and Mouse, Keyboard and Mouse, Mouse</p>
---	--

References

- [User Manual](#)