



Contents [[hide](#)]

- [1 JEAS Q7 Wireless Intercom Headset System](#)
- [2 Product Information](#)
- [3 Product Derails](#)
- [4 Product Installation](#)
- [5 Product Operations](#)
- [6 Bluetooth Intercom](#)
- [7 Bluetooth Pairing](#)
- [8 Fcc Statement](#)
- [9 Frequently Asked Questions](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



JEAS Q7 Wireless Intercom Headset System




Product Information

Specifications

- Model: Q7
- Version: 7-Riders
- Functionality: Motorcycle Helmet Intercom System with Music Share

Product Details

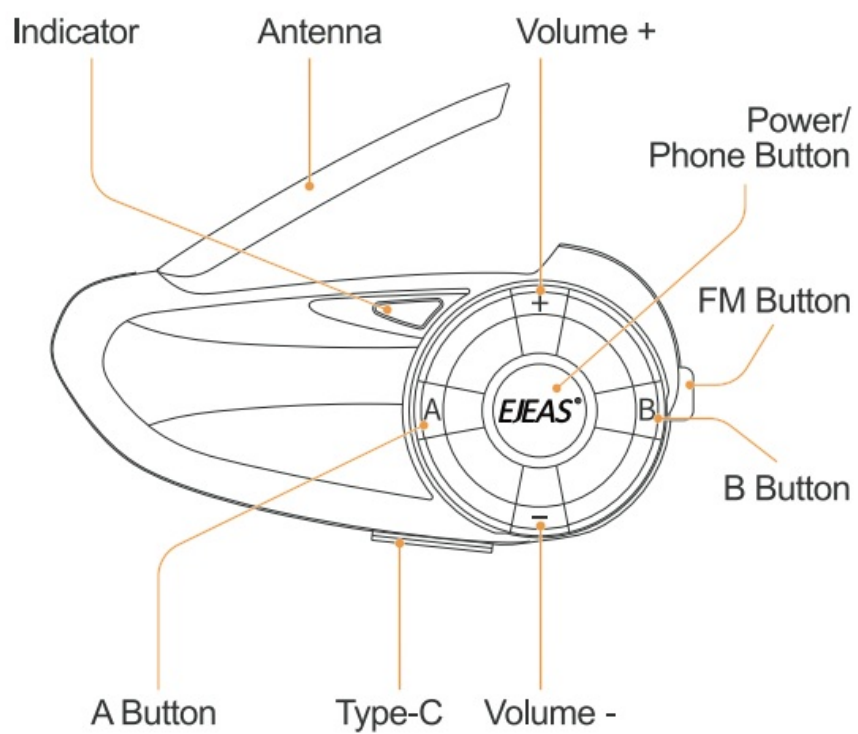

SaleRiding APP

The SafeRiding App allows you to set up your group and stay connected with your friends. Save time and enjoy your adventure even more! You can also see more product operations precautions and multiple language operations! Download the EJEAS SafeRiding App for Android and Apple operating systems from ejeas.com/support

**SafeRiding
APP**




iOS




Andriod

Product Installation

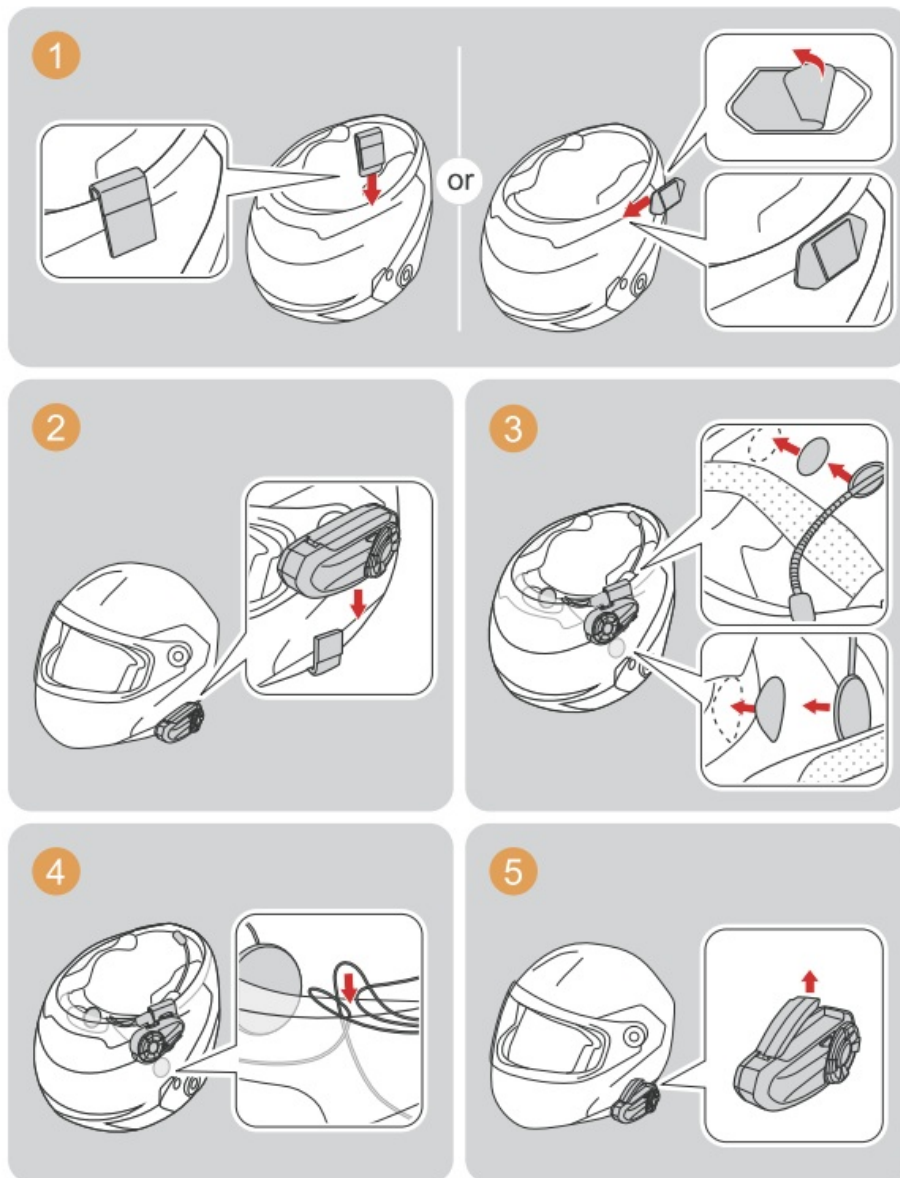

Product Operations


Operation Diagram

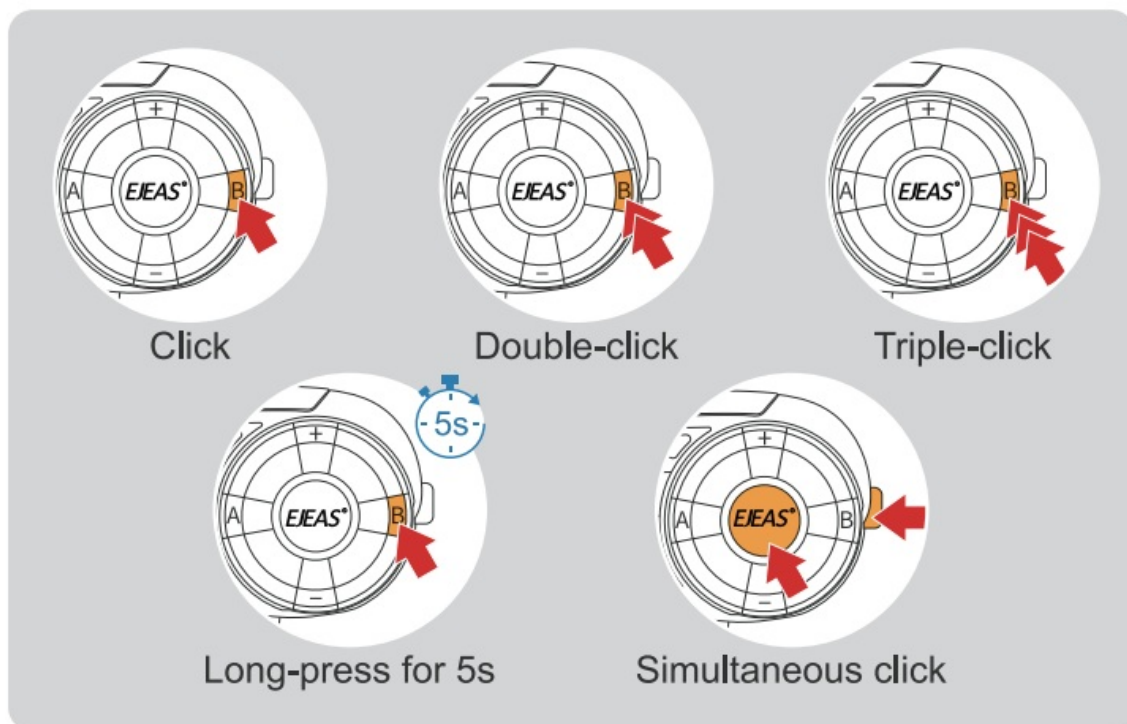

Basic Operations

Power ON/OFF


Please charge it before using.

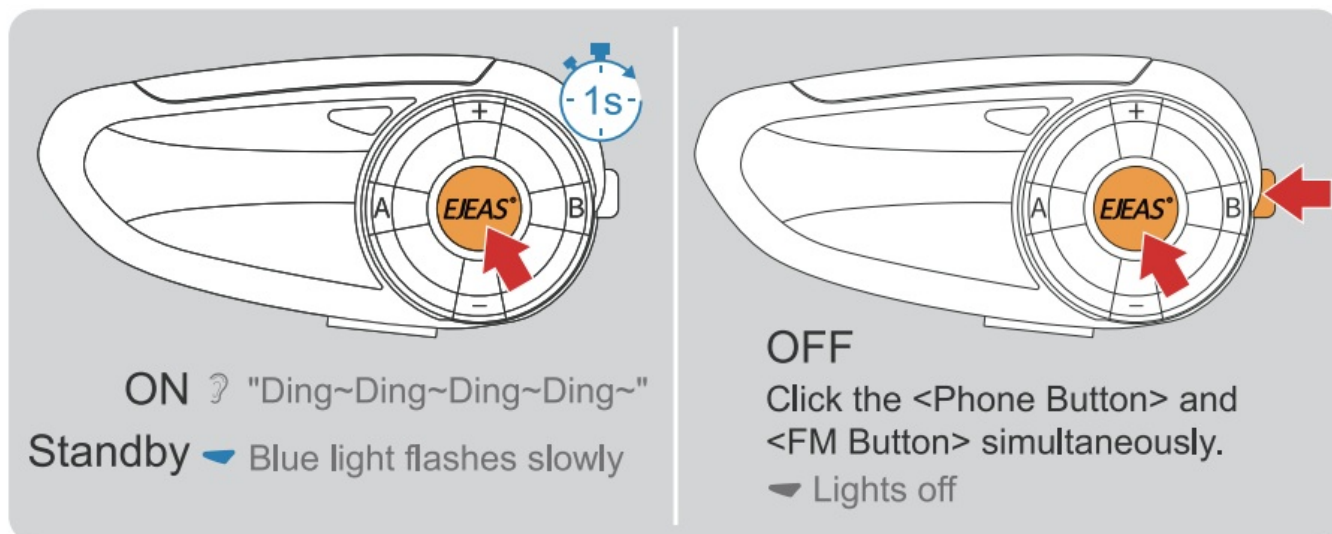

Battery Level



or




? "Battery Level High"

? "Battery Level Medium"

? "Battery Level Low"


Low Battery Indication

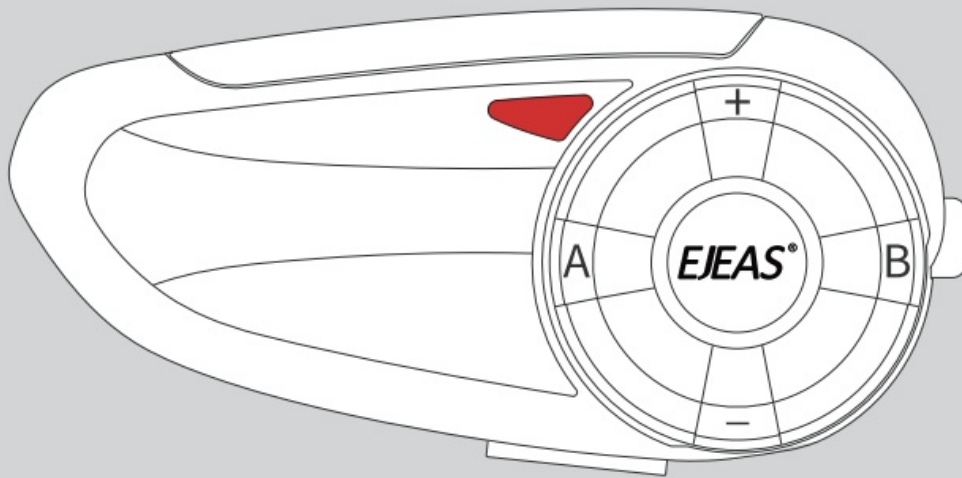



Red light flashes twice

? "Low Battery"

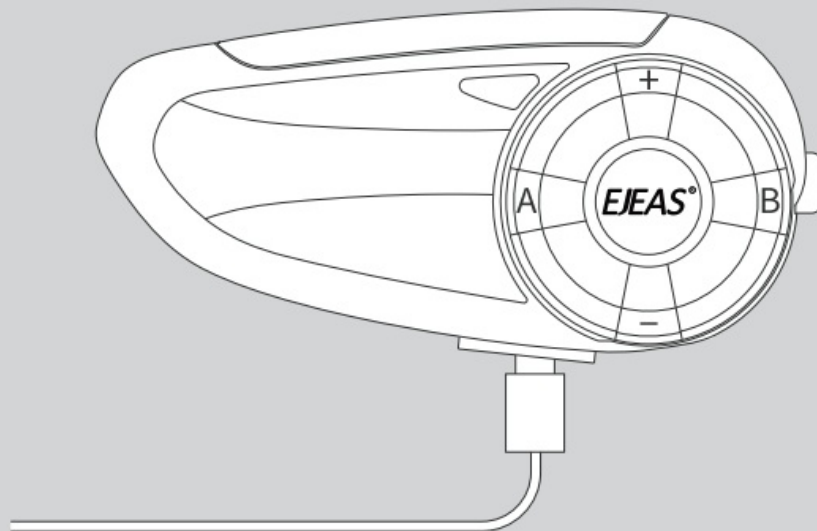Charging Indication




Charging  Red light always on
Full  Red light off

Volume Control FM and intercom can be used at the same time.

Intercom / Calling / Music / FM



When intercom & FM used simultaneously, FM volume control



Factory Reset


Long press the <Volume+>, <Volume->, <Phone Button> for 5s at the same time.



Red light quick flashes three time, blue light flashes once




“Restore Default Setting”

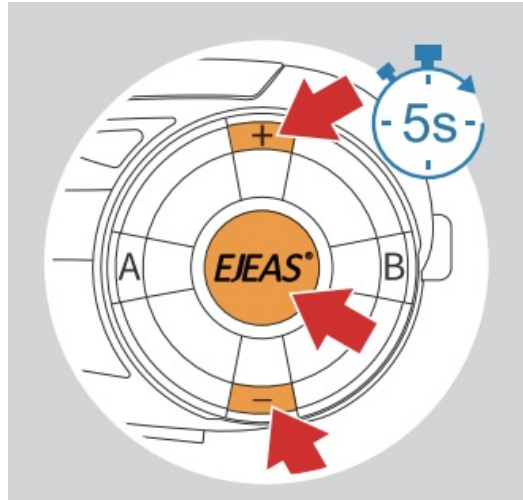

Bluetooth Intercom

Two-Intercom Pairing

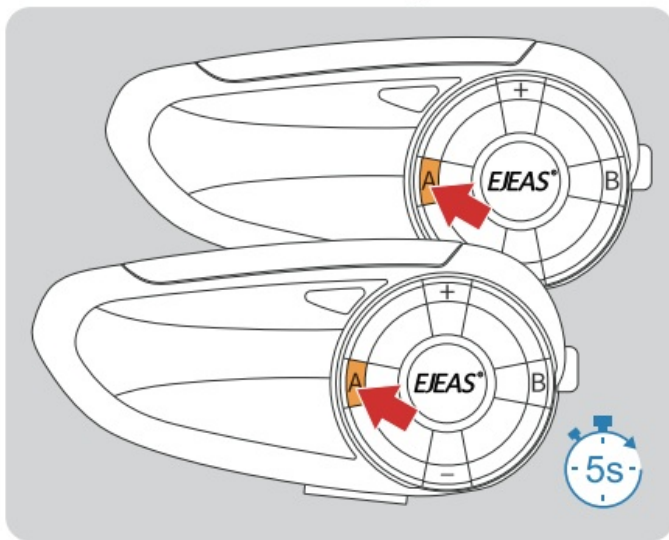

1 Long-press <A Button> for 5s of both.

Red and blue lights flash fast alternately

? "Intercom A Pairing"

Searching and paring.

Paring successfully.

Blue light flashes simultaneously

? "Intercom Pairing Successful"


Connected, start communication.

? "Intercom A Connected"


Multi-Intercom Pairing (3-7 models)

All the following voice prompts refer to the host.


Regard one as host, the rest are all sub-intercom.

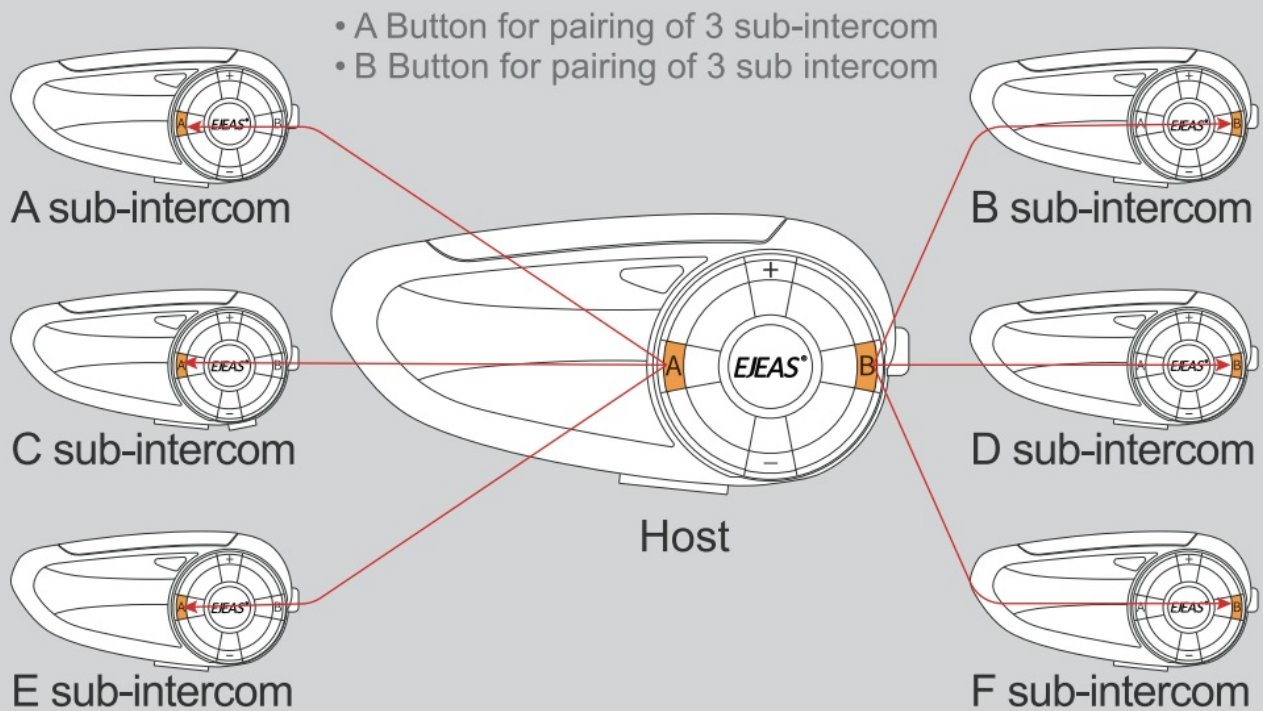

Pair with A sub-intercom

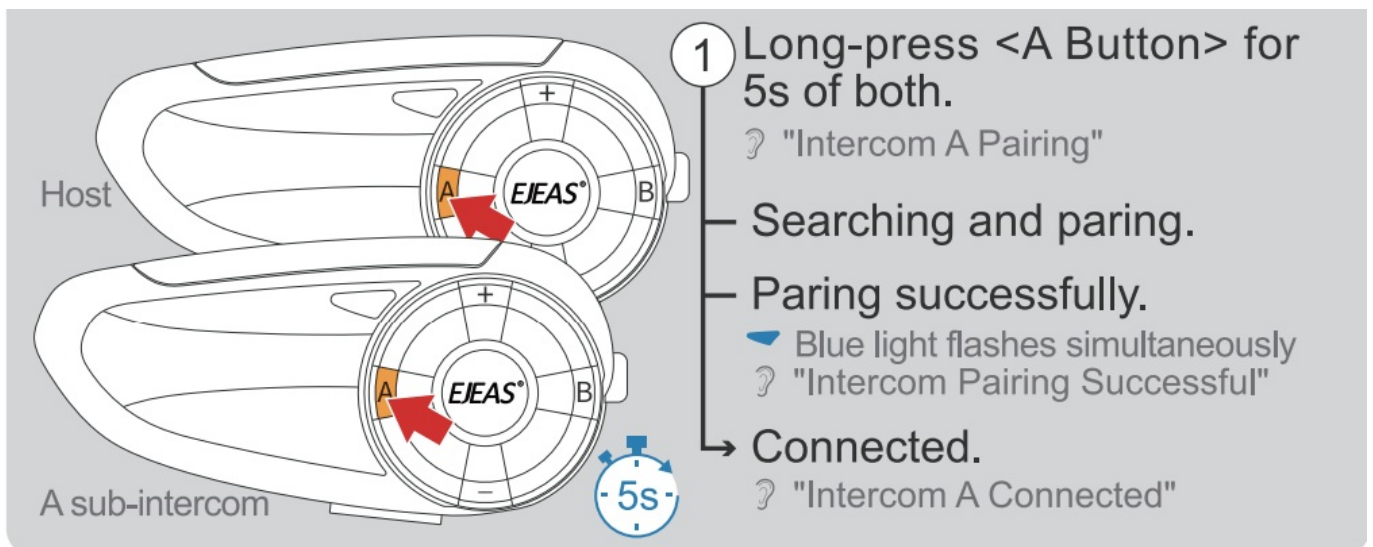

Pair with B sub-intercom

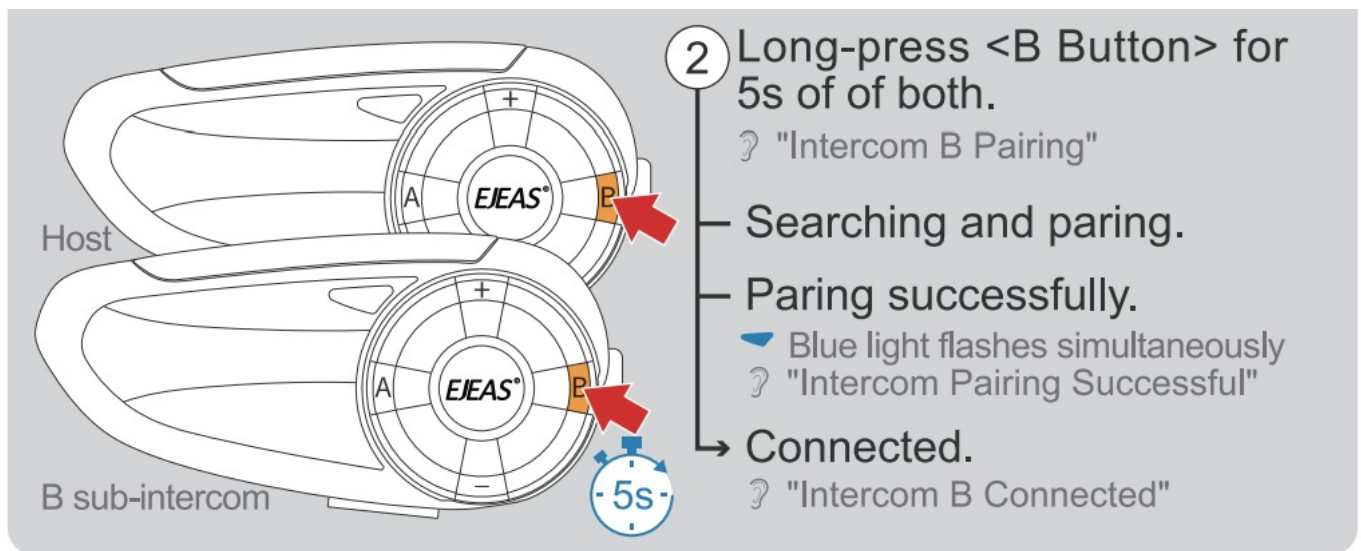

- **3 Pair with C sub-intercom**

Long-press <A Button> for 5s of of both.

- **4 Pair with D sub-intercom**

Long-press <B Button> for 5s of of both.

- **5 Pair with E sub-intercom**

Long-press <A Button> for 5s of of both.

- **6 Pair with F sub-intercom**

Long-press <B Button> for 5s of of both.

(Recommend marking all the intercom for easy switching)

Intercom Switching Only the Host allows to switch.



Click to talk
to A intercom



Double-click to talk
to C intercom



Triple-click to talk
to E intercom



Click to talk
to B intercom



Double-click to talk
to D intercom




Triple-click to talk
to F intercom

Intercom switching ➤ Blue light quick flashes

Start talking ➤ Blue light flashes simultaneously

Intercom Disconnection

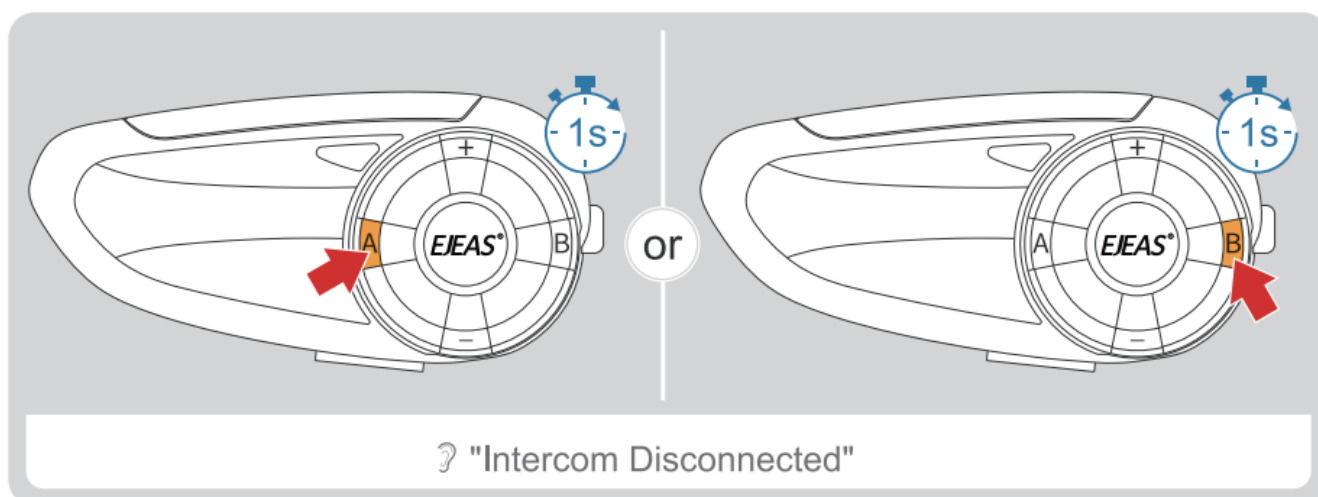


Compatible with Old Intercom Pairing



1. Long press< A Button> for 5s, while V4/V6 enter the pairing mode.

-  : Red and blue lights flash fast alternately

- ? “Intercom A Pairing”

2. Click < A Button> enter Bluetooth search mode.

-  : Red and blue lights flash twice alternatively
- ? “Intercom A Searching”

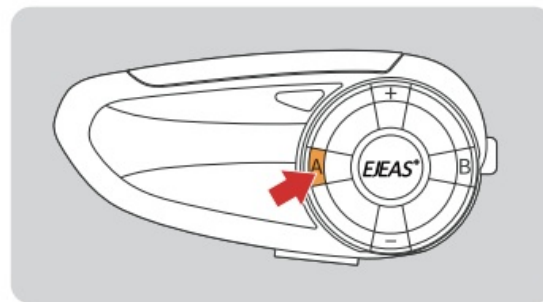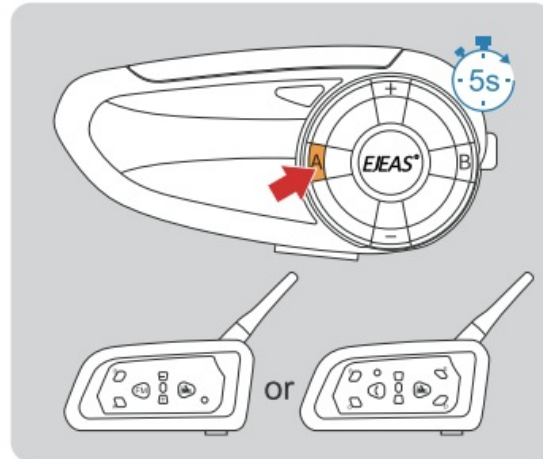

Pairing successfully.

Blue light flash fast

- ? “Intercom Pairing Successful”

Connected, start communication. : ? “Intercom A Connected”

Bluetooth Pairing

Phone Pairing

1. Long press the <Phone Button> for 5s to enter the pairing mode.
(If no phone connected, it will exit pairing mode after 2 mins)





: Red & blue lights flash fast alternately



“Phone Pairing”

2. Open your phone's Bluetooth, search and pair with the device.

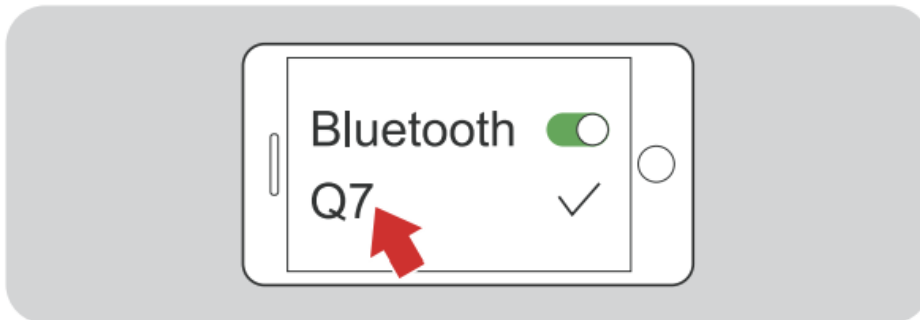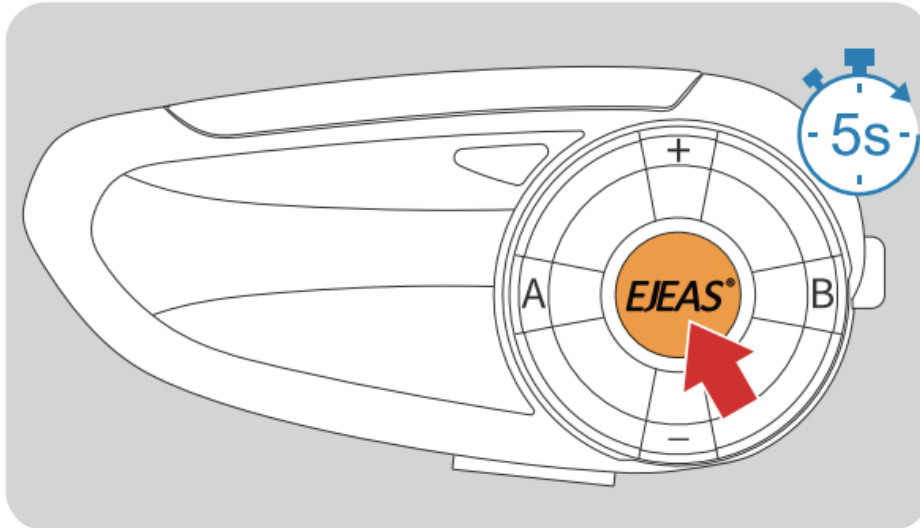

Pairing successful – Blue light twice flashes slowly

“Pairing Successful, Connected”


Current power will be shown on your phone.

(Phone must support HFP)



Phone Reconnection


Automatically connect back to the last paired.

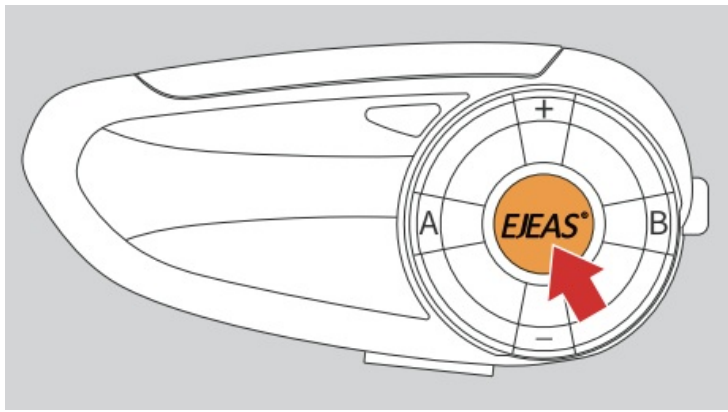


Mobile Phone

Answer a Call


Auto answering within 8s if no any operation.

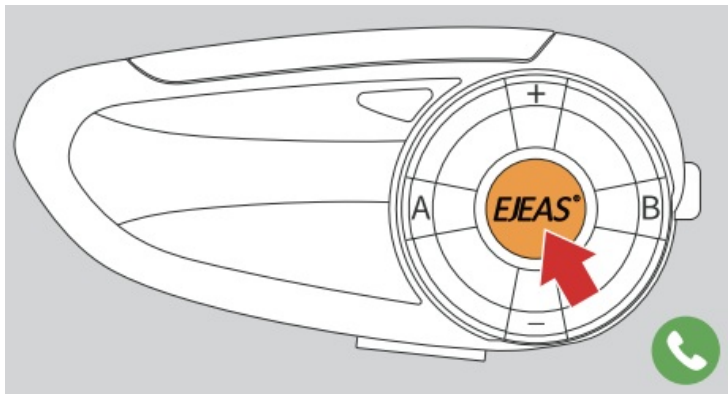


Reject a Call

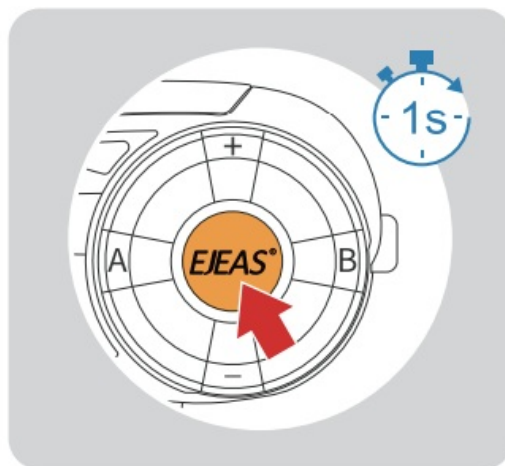


Last Call Replay

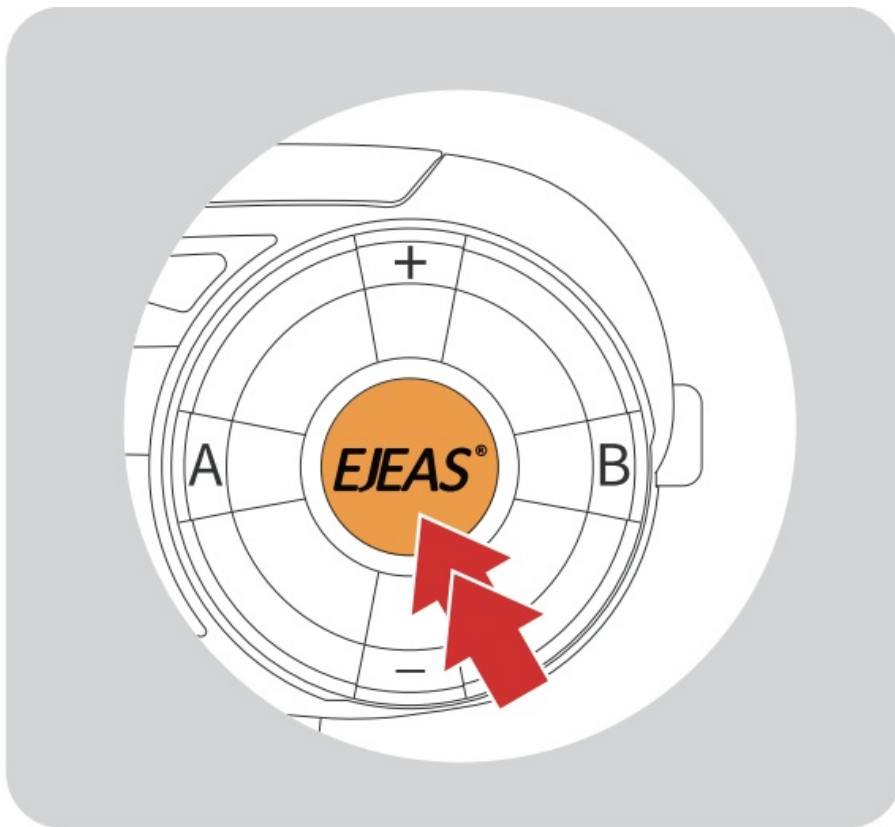

End a Call

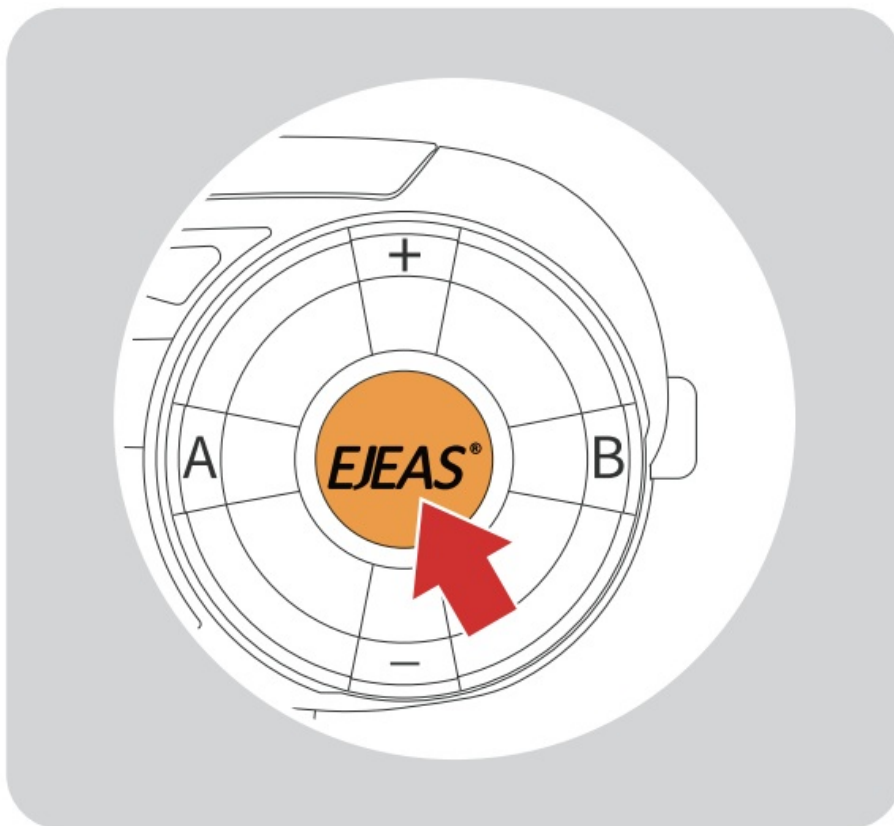


TEL Priority When listening to music/FM/intercom, and receiving a phone call.

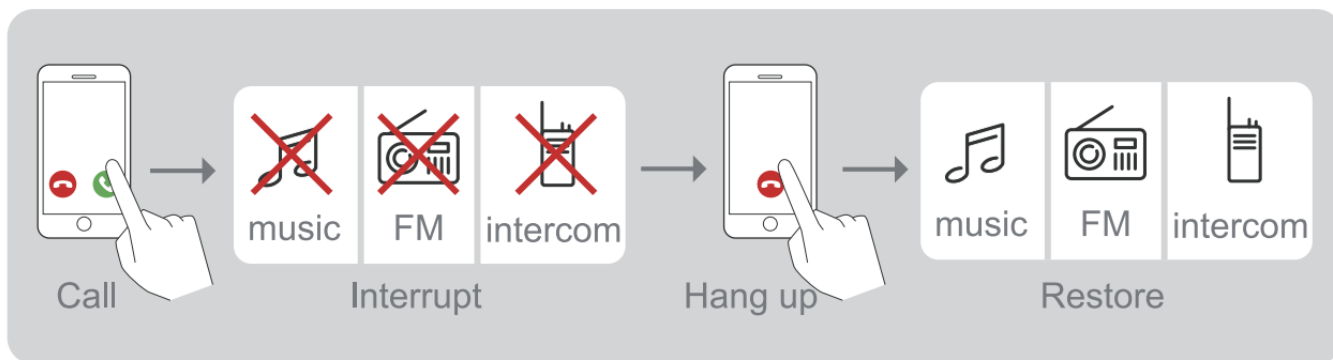


Voice Assistant

Phone must support & open the voice assistant (Google assistant & Siri).

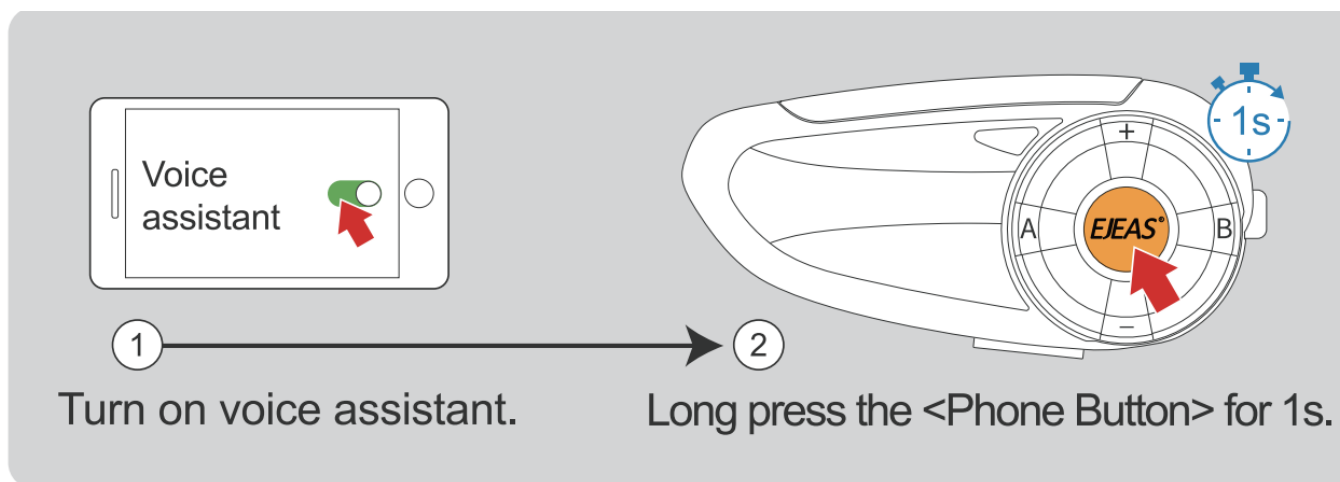


Music Control

Music Play/Pause

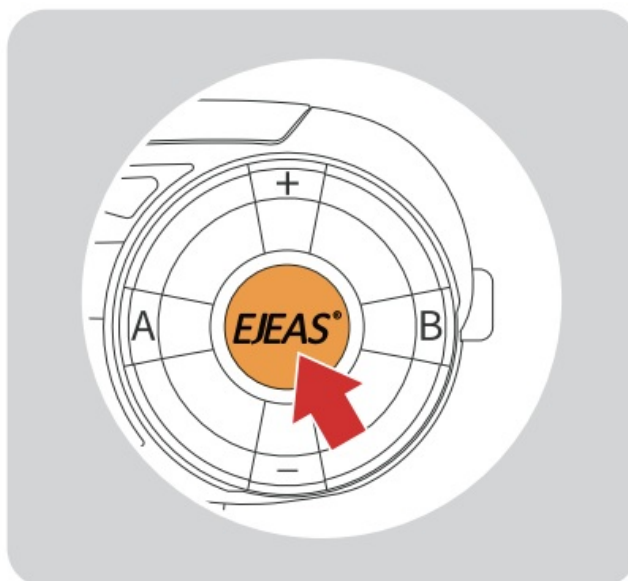

Music Switching

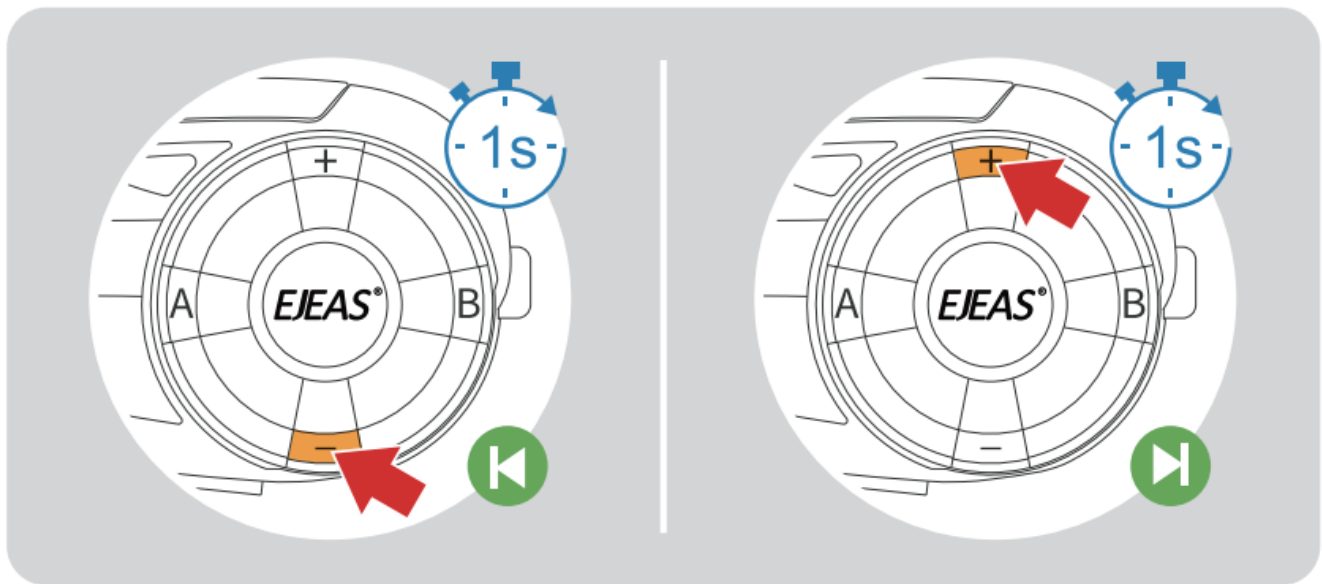

FM Radio

FM ON/OFF 76~108MHz

Auto search and radio, intercom and radio could working at the same time.




Long press <FM Button> for 1s to open the FM.

- Blue light is always on for 4s
- Red light double flashes quickly
- ? "FM Radio"

Long press <FM Button> for 1s to close the FM.

- ? "FM Radio Off"

Frequency Switching





Frequency -

Frequency +

Music Share


Share the music played by Bluetooth on your phone to another device, and this function cannot be used during Bluetooth intercom. This function cannot be used when two phones are connected simultaneously.

1. Take an intercom as the host, connect it to the phone, and the other one is the slave.
2. Press the <Phone/Power Button>+<Volume -> at the same time between the host and slave to enter the music sharing search connection state. ? “Music Share”

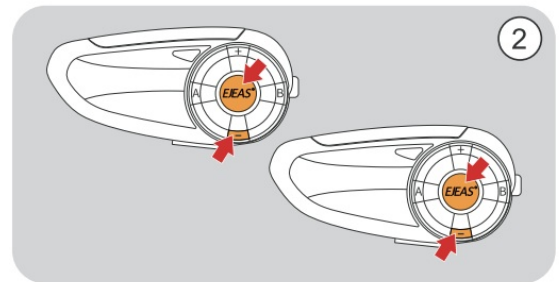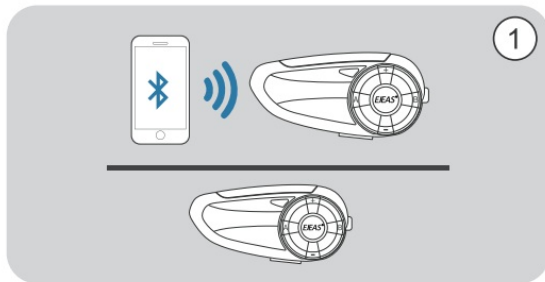

3. After the connection is successful play the phone music of the host, and the music can also be played from the speaker. ? “Music Share Connected”

4. Press the <Phone/Power Button>+<Volume -> again to exit music sharing. ? “Music Share Disconnected”

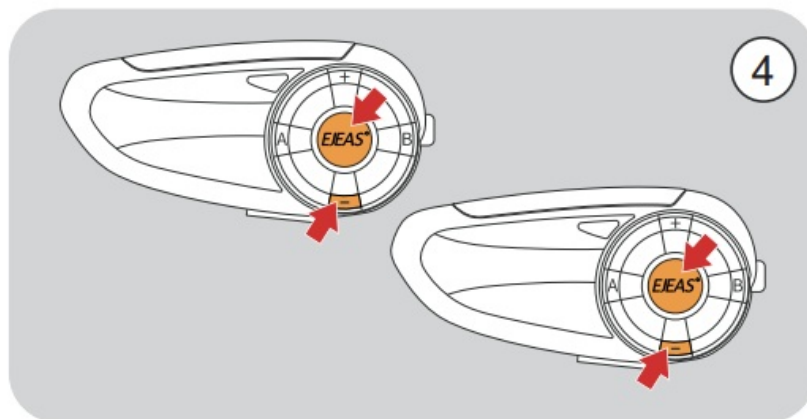

Fcc Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference

to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation

Pairing operation with EUC handle, please scan the code to view the corresponding manual.



Frequently Asked Questions


- **Q: Can I use the Music Share function during Bluetooth intercom?**

A: No, the Music Share function cannot be used simultaneously with Bluetooth intercom. It is designed to share music between devices when not engaged in intercom conversations.

- **Q: Can I connect two phones at the same time for Music Share?**

A: No, the Music Share function does not support connecting two phones simultaneously. You can only pair one host device with one slave device for music sharing.

Documents / Resources

	<p>EJEAS Q7 Wireless Intercom Headset System [pdf] User Manual</p> <p>Q7, 7-Riders, Q7 Wireless Intercom Headset System, Q7, Wireless Intercom Headset System, Intercom Headset System, Headset System</p>
---	--

References

- [User Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.