

Installation guide

Solenoid valve
Type EV250BW



UK
CA

132R9003

132R9003

A	☒ ≥ 297 Microns ☒ ON OFF	
1	2	3 132R9003 02100 EV250BW 110 G 13 16 POWER 1000000 MADE IN DENMARK 132R9003 02100 EV250BW 110 G 13 16 POWER 1000000 MADE IN DENMARK
4 Max. 90° / Recommended 15° Max. 90° / Recommended 15°	5 Max. 90° / Recommended 15° Max. 90° / Recommended 15°	6
7	8	9 OFF

Info for UK customers only: Danfoss Ltd., 22 Wycombe End, HP9 1NB, GB

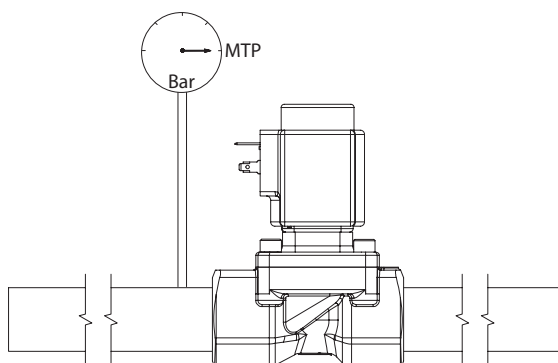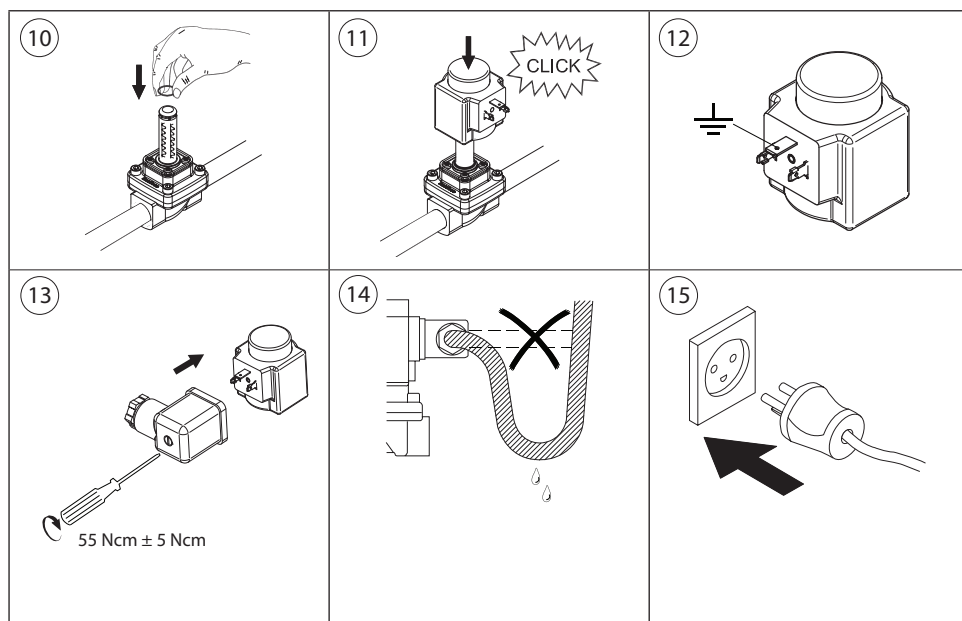

Drinking water approval			
 1002	CERTIFIERAD	Valid in	Certificate no.
			
	356 Inspected by DTI		
EV250BW 10 - 22 BE		DK, SE	SCO155-18 *)
*) http://publiccert.extweb.sp.se/sv/Product/List/ Wetted parts in accordance with DVGW, 4MS, KTW and W270			

DN	Max. Working Pressure (MWP)	Max. Test pressure (MTP)
	[bar]	[bar]
10 - 22	10	15
EN 60730-2-8		

Visit www.products.danfoss.com for further technical data

Para más información, visite www.products.danfoss.es

Rendez-vous sur le site www.products.danfoss.fr pour plus de données techniques