

ENFORCER SD-927PKC Wave Open Sensor Override Button Owner's Manual

[Home](#) » [ENFORCER](#) » ENFORCER SD-927PKC Wave Open Sensor Override Button Owner's Manual 

ENFORCER SD-927PKC Wave Open Sensor Override Button



Contents

- [1 Wave-to-Open Sensor](#)
- [2 Features:](#)
- [3 Specifications](#)
- [4 Dimensions](#)
- [5 Ordering Information](#)
- [6 Customer Support](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)


Wave-to-Open Sensor

SD-927PKC-NEQ English*, No-Touch

SD-927PKC-NEVQ English*, No-Touch, Override Button

The ENFORCER Wave-to-Open Sensor uses IR technology to allow egress from a protected area or activate a device with just a wave of a hand. Since no touch is required, this sensor is suitable for use in hospitals, clinics, labs, clean rooms (to reduce the risk of contamination), schools, factories, or offices. The SD-927PKC-NEVQ adds a manual override button.

Features:

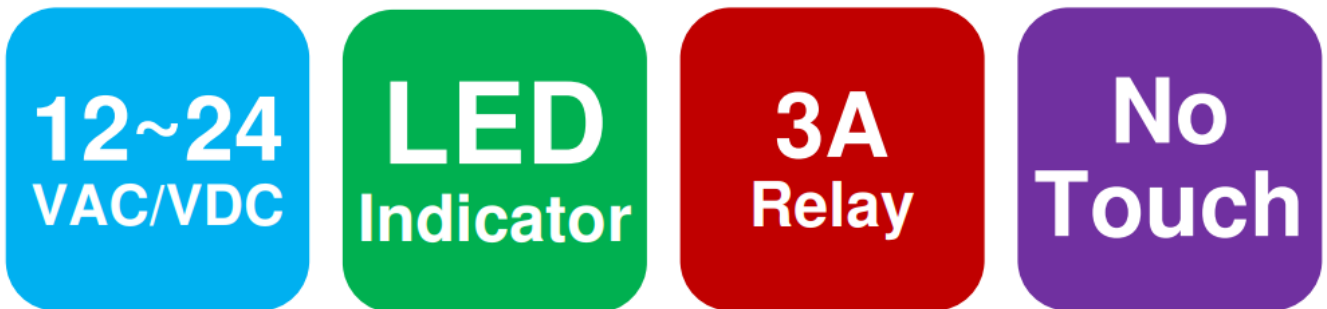

- Operating voltage, 12~24 VAC/VDC
- Range adjustable from 23 /8"~8" (6~20 cm)
- Stainless steel single-gang faceplate
- 3A relay, adjustable from 0.5~30 sec, toggle, or as long as hand is near the sensor
- Quick connect scrawls terminal block
- LED illuminated sensor area for easy identification
- Selectable LED colors (turns from red to green or green to red when activated)

SD-927PKC-NEVQ

- Adds manual override button as a backup to the sensor


Specifications

| | | | |
|-----------------------|--------------------|---|----------------|
| Model | | SD-927PKC-NEQ | SD-927PKC-NEVQ |
| Operating voltage | | 12~24 VAC/VDC | |
| Current draw (max.) | | 120mA@12VDC | |
| Relay type | | Form C dry contact NO/NC/COM, 3A@24VDC | |
| Override button | Switching capacity | N/A | 3A@24VDC |
| | Mechanical life | N/A | 500,000 Cycles |
| Response time | | 10ms | |
| LEDS | Standby | Red† | |
| | Triggered | Green† | |
| Output time | | Adjustable, 0.5~30sec., toggle, or as long as sensor is triggered | |
| Sensing range | | Adjustable, 23 /8"~8" (6-20 cm) | |
| Operating temperature | | -4°~131° F (-20°~55° C) | |
| Dimensions | | 2 3 /4"x4 1 /2"x1 1 /8" (70x114x28 mm) | |
| Weight | | 3-oz (85g) | 3.9-oz (110g) |


*French (SD-927PKC-NFQ, SD-927PKC-NFVQ) and Spanish (SD-927PKC-NSQ, SD-927PKC-NSVQ) faceplates also available. †Reversible by jumper

Dimensions


- Front View

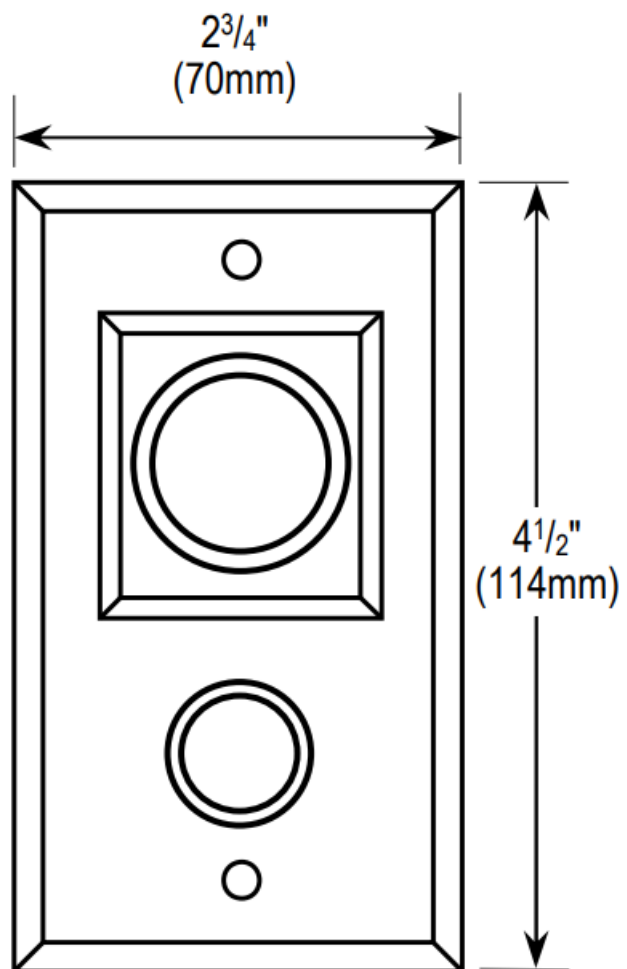



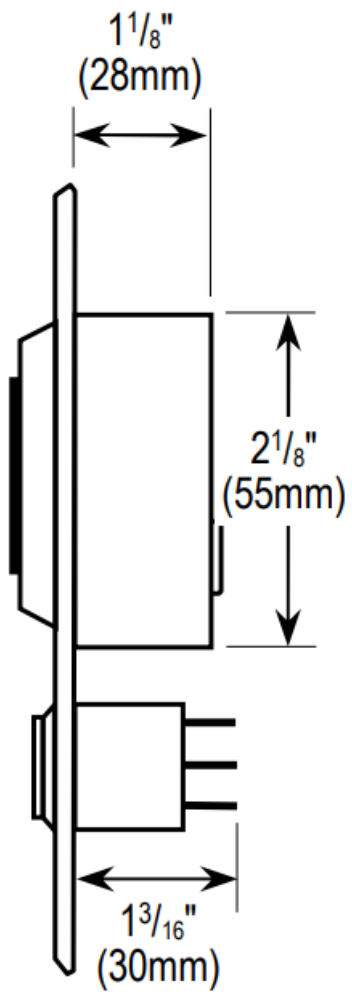

- Side View

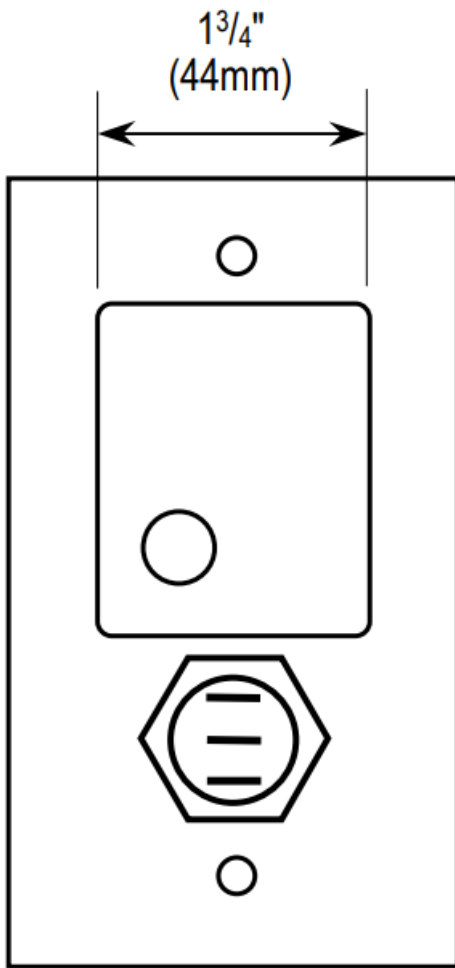






- Back View



Ordering Information

| Wave-to-Open Sensors | | | | |
|----------------------|---|---|--|---|
| Model | SD-927PKC-NEQ | SD-927PKC-NFQ | SD-927PKC-NSQ | SD-927PWCQ* |
| Language | English | French | Spanish | English, French, and Spanish Decals |
| Photo |  |  |  |  |

| Wave-to-Open Sensors with Override Button | | | |
|---|---|--|---|
| Model | SD-927PKC-NEVQ | SD-927PKC-NFVQ | SD-927PKC-NSVQ |
| Language | English | French | Spanish |
| Photo |  |  |  |

| Sensor Only | | | |
|-------------|---|---|--|
| Model | CS-PD535-TAQ | CS-PD535-TBQ† | For our full line of OEM/private label infrared sensors, contact SECO-LARM |
| Photo |  |  | |
| Description | 1 1/4" (32mm) Sensor | 1 1/4" (32mm) Sensor | |

Customer Support



*For SD-927PWCQ specifications, visit www.seco-larm.com †Special order. Contact SECO-LARM for details

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2022 SECO-LARM U.S.A, Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.


The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to

Phone: change prices and specifications without notice. SECO-LARM is not responsible for misprints **SECO-**

LARM® ENFORCEW®CRIMEBUSTER® CBA® SLI®A® .”“ PI_SD-927PKC-NExQ_220902.docx



Documents / Resources

| | |
|--|---|
|  | <p>ENFORCER SD-927PKC Wave Open Sensor Override Button [pdf] Owner's Manual SD-927PKC Wave Open Sensor Override Button, SD-927PKC, Wave Open Sensor Override B utton, Sensor Override Button, Override Button, Button</p> |
|--|---|

References

- [🌐 La Armería de Madrid - fabricantes de armas y rifles](#)
- [🏢 SECO-LARM USA Inc](#)
- [User Manual](#)