



ENVIO V1908F85-8E PoE Security Camera System User Guide

[Home](#) » [ENVIO](#) » ENVIO V1908F85-8E PoE Security Camera System User Guide 

Contents

- 1 ENVIO V1908F85-8E PoE Security Camera System
- 2 PACKAGE CONTENTS
- 3 PRODUCTS REVIEW
- 4 System Settings
- 5 Internet Connection
- 6 How to setup video record
- 7 How to playback video
- 8 How to backup video
- 9 Add new camera or replace defective camera
- 10 Restore to Factory Setting
- 11 Remote Access on Mobile Device
- 12 Remote Access on PC Client
- 13 FAQ
- 14 Contact
- 15 Documents / Resources
 - 15.1 References



ENVIO V1908F85-8E PoE Security Camera System



Please read this quick guide thoroughly before using and keep it well for future reference.

PACKAGE CONTENTS



Monitor NVR



Power Adaptor



Power Cable



Ethernet Cable



HDMI Cable



Mouse



User Manual



Screw Sets

PRODUCTS REVIEW



NVR Details



1. USB
2. ethernet
3. POE
4. HDMI
5. Audio out
6. DC power
7. Switch
8. power indicator
9. Speaker

Connection



System Settings

System Wizard

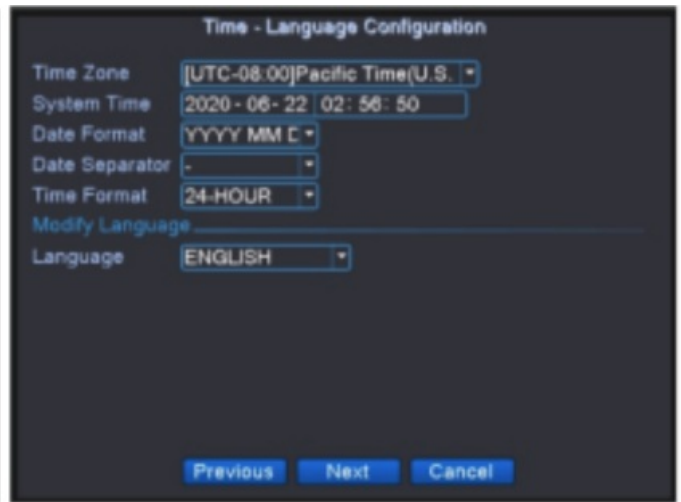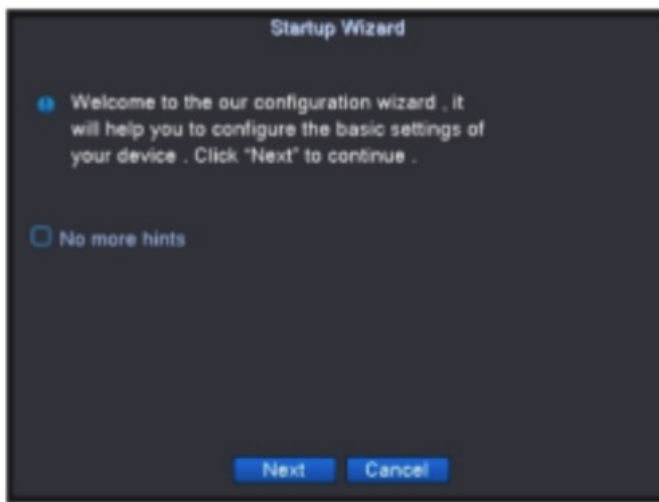


1. Hit "No more hints" to exist system wizard.





2. Mobile APP name is "XMeye", you can scan the "APP" QR Code to download it or go to Google Play/APP store to download it.

System Login

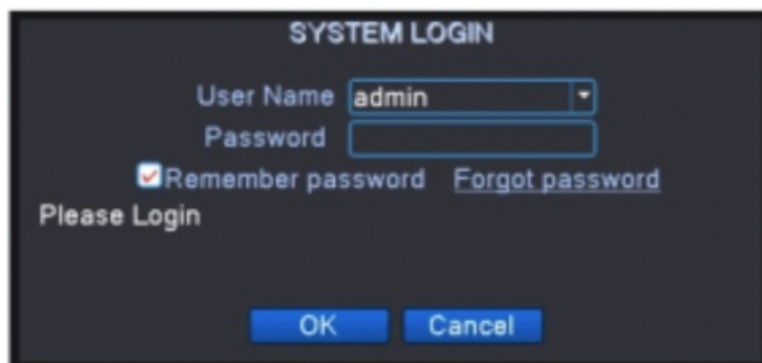





1. Default password is blank (no password)

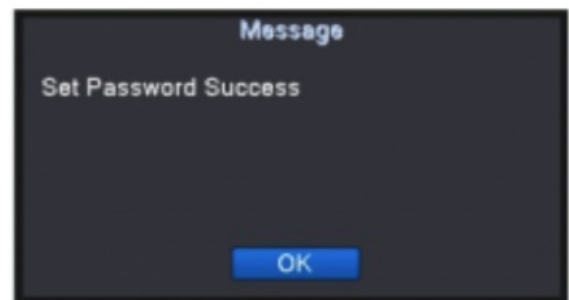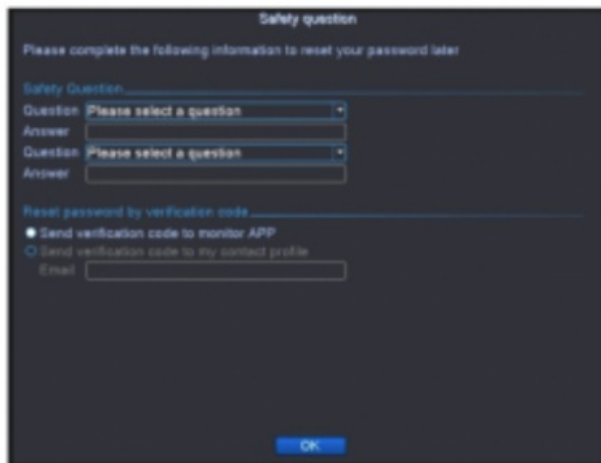

2. If you don't want to set Security Question", please reboot the NVR by press the ON/OFF button.

Internet Connection

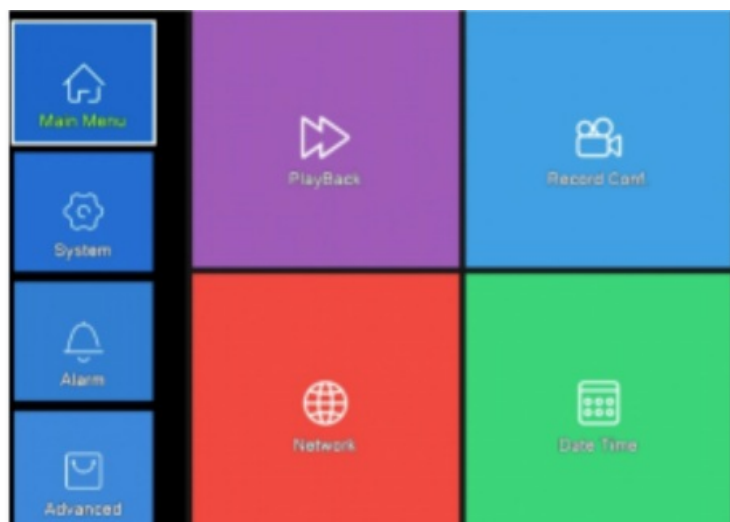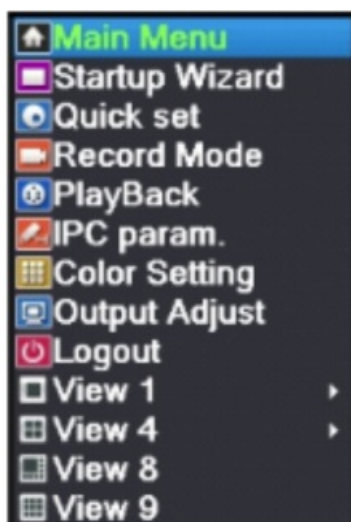

1. Please connect NVR box to Router via Network Cable;
2. Right-Click Mouse Navigate to Main Menu > Network > Enable DHCP;
3. After that, please go to "Net Service", if the "Cloud Status" shows online, means NVR is online and ready for remote access.

- If the “Cloud Status” shows “Probing DNS”, please reboot NVR device by press ON/OFF button.





- If the problem remains, please contact the vendor.

How to setup video record

24/7 Video Record

Please right-click mouse navigates to Main Menu > Record Conf.

Tips

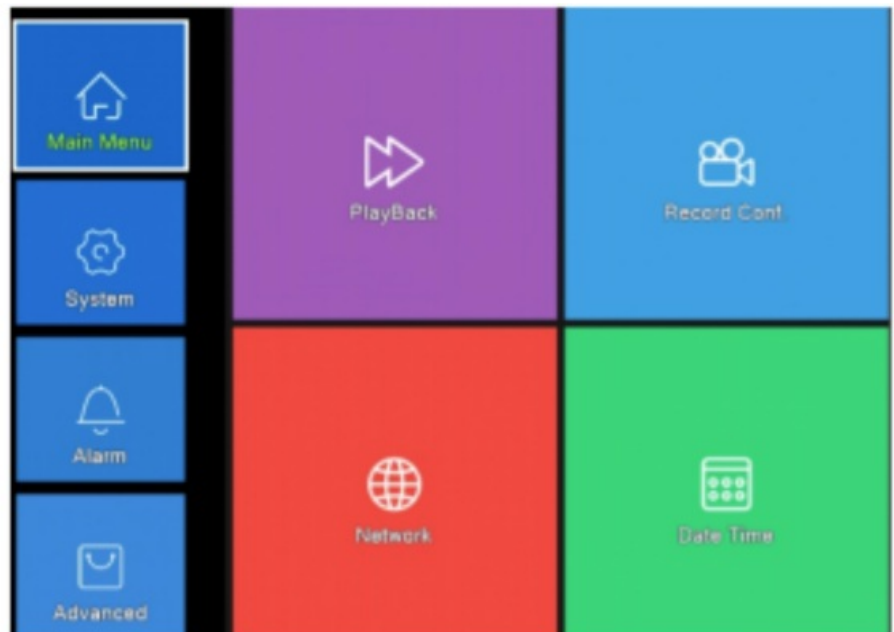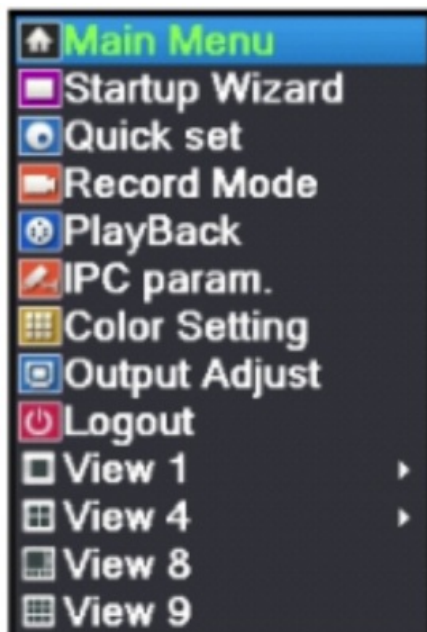



1. You can customize schedule recording based on your needs
2. The default Setting is for Channel 1, hit “Advanced”> “Copy”, Copy the settings to other channels.

Motion Detect Recording




- Please right-click mouse navigates to Main Menu > Alarm > Intelligent Alert > Tick of “Enable”,


Tips

1. The device will be only recording when motion detected.
2. Please Tick off “Mobile Reported” if you need alert push to Mobile APP.
3. Default Setting is for Channel 1, hit “Advanced” > “Copy”, Copy the settings to other channels.

How to playback video

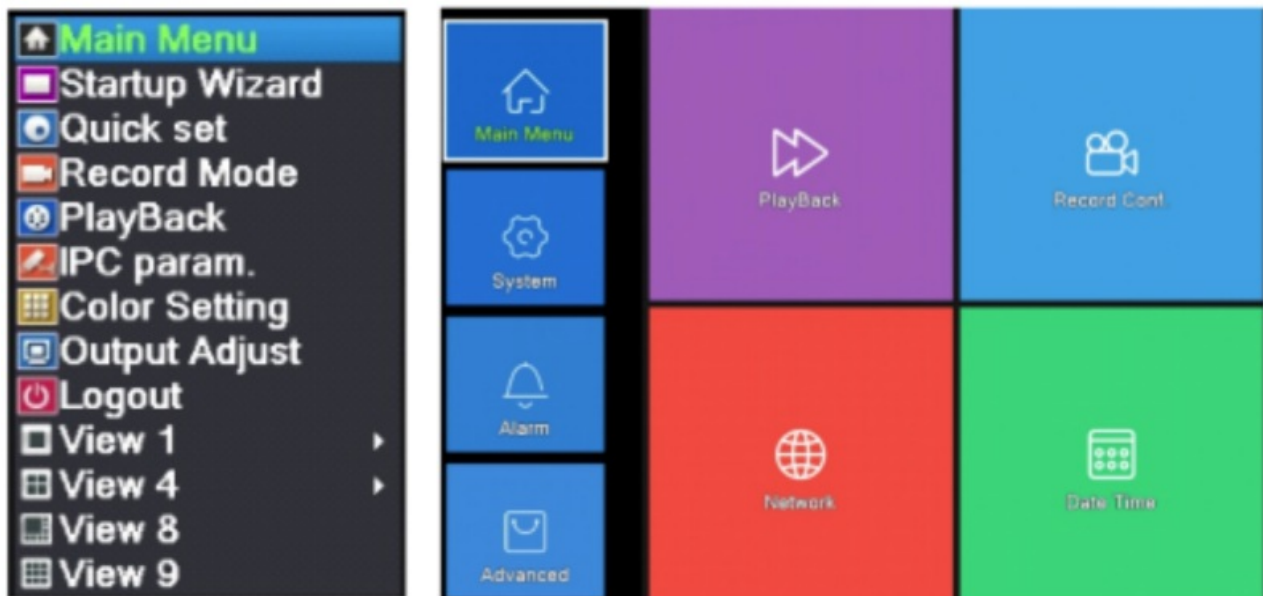

1. Right-Click Mouse, hit “Playback”, Or go to Main Menu > Playback

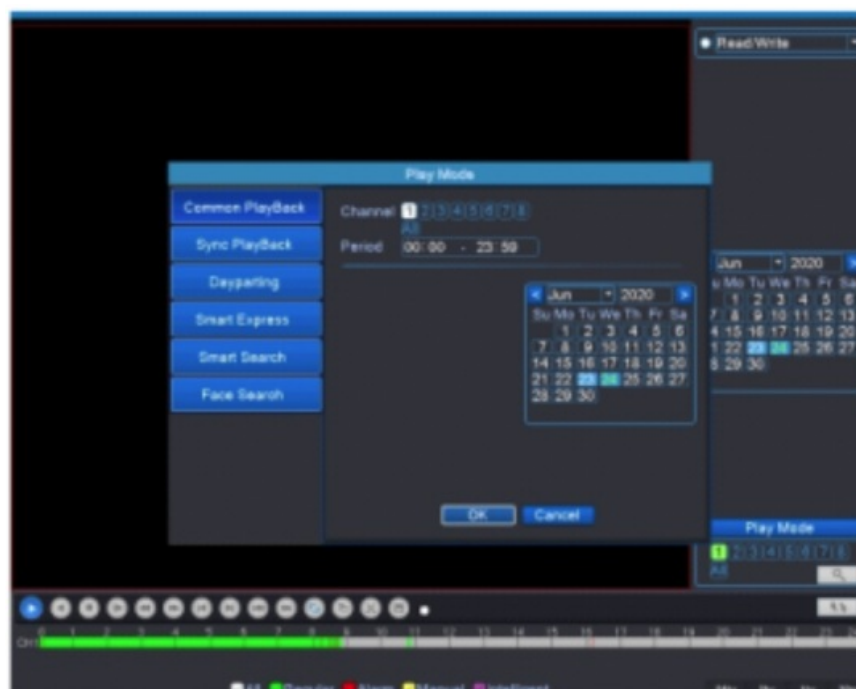


2. Select Channel, Period, date, then click “OK”

- **Green:** Regular Recording
- **Red:** Alarm Recording

How to backup video

1. Insert your USB Device to NVR's USB port.

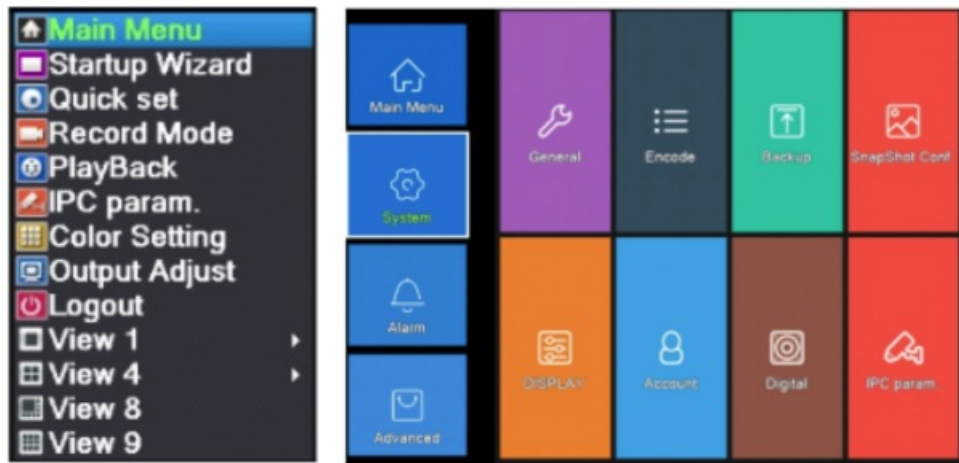

2. Right-Click Mouse, navigates to Main Menu > System > Backup.



3. NVR will Detect available USB device. Click 'Backup*. If your USB Device didn't show up, click "Detect"



4. Select Record Type > Select Channel > Set the Time > Click Add




5. Select the video Files> Choose Backup format > Start.

- Please choose “MP4”, it’s compatible with most of video player.


Add new camera or replace defective camera

1. Please connect camera to VR box via Ethernet cable, make sure camera and NVR are powered

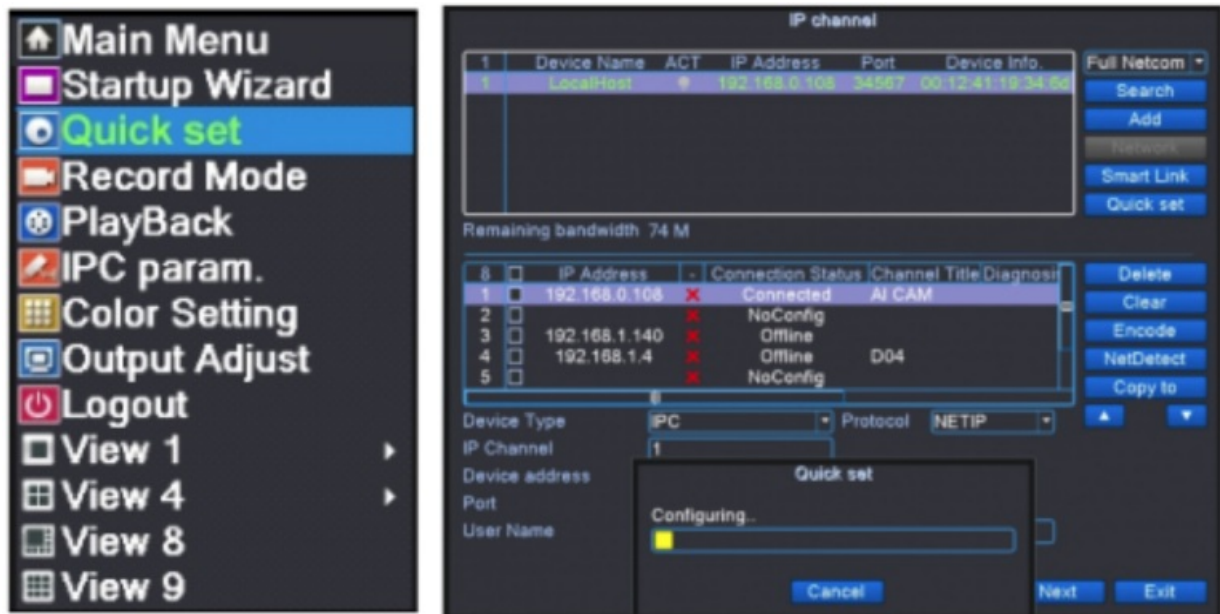


2. Right-click mouse > Quick Set (Normally NVR will be configuring automatically)

3. If your camera still not connected, please manual add as below.

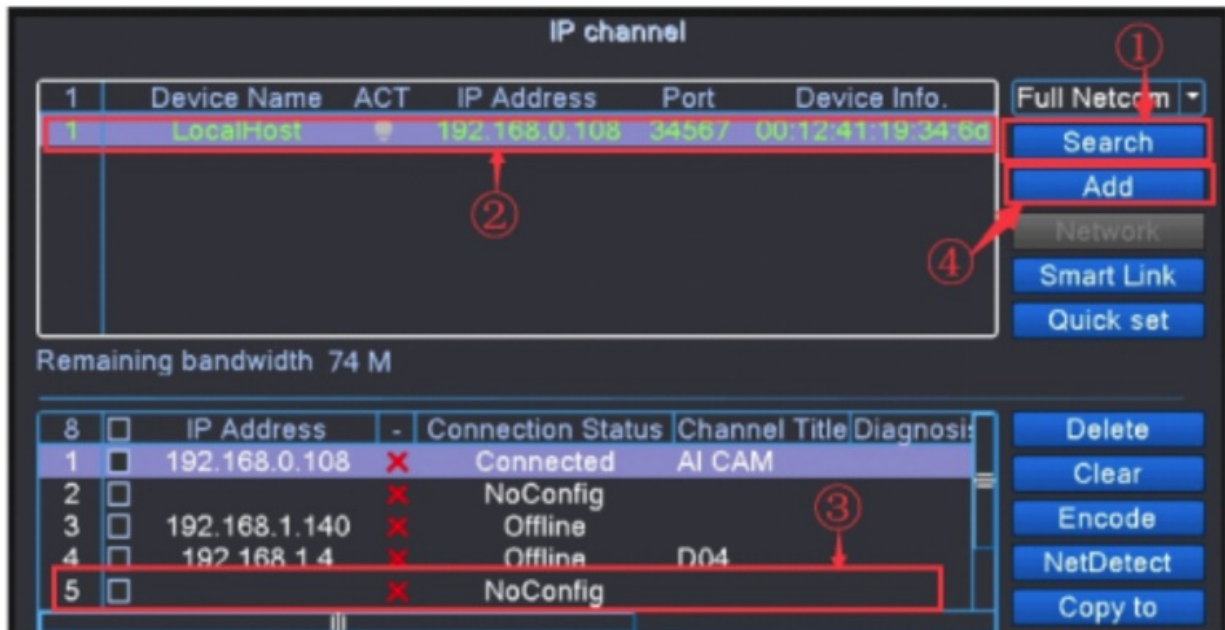


- Click "Search", NVR will search camera with same IP segment, then select the new camera's IP address
- Select an empty Channel for the new camera (for example #5), then click "Add"
- After configuration successful, click "Apply" to save settings then click "Exit".

Restore to Factory Setting

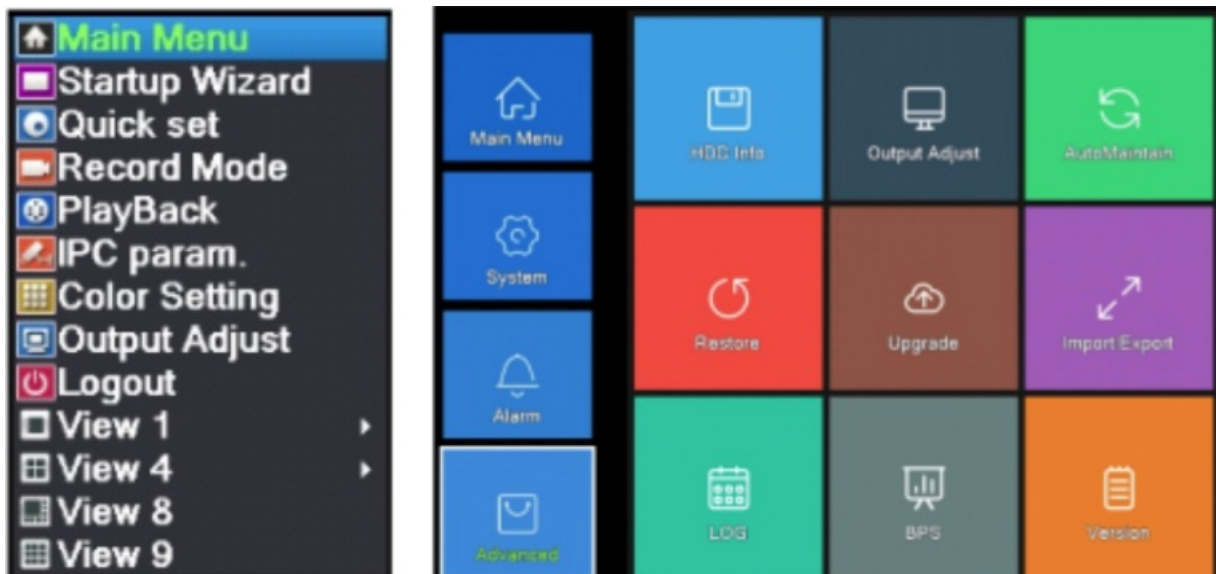

- Please right-click mouse navigates to Main Menu > Advanced > Restore.

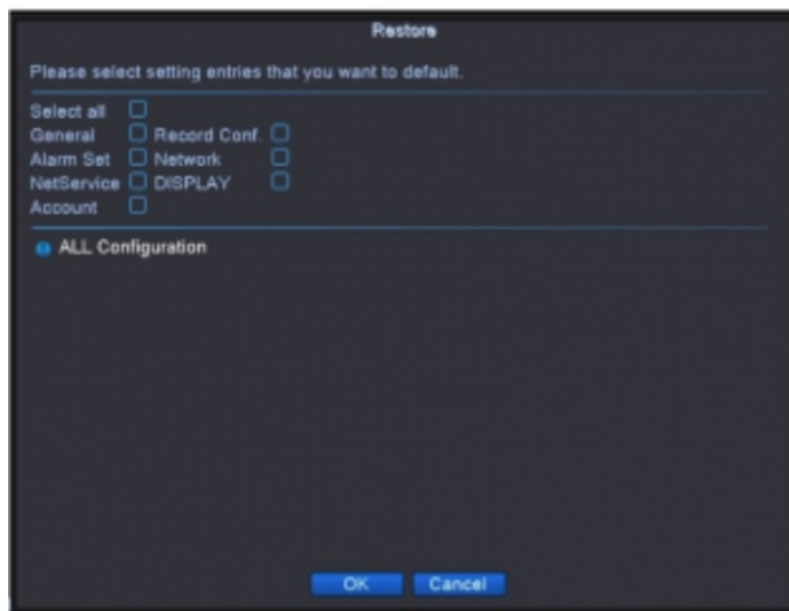

- Tick of "Select all" > Click "OK"

Explanation of Icons

	Channel's Name		Motion Detected(Default)
	Recording		Play the video recorded for latest 5 minutes
	Mute/Unmute		Face Detected(Display only after enabling)
	Human Shape Detected(Default)		Video Feed Loss Detected(Display only after enabling)
			Camera Blocked Detected(Display only after enabling)

	Play/Pause		Reverse to play
	Stop		Play in slow motion
	Fast Reverse		Fast Forward
	Previous Frame		Next Frame
	Previous Video		Next Video
	Repeat to play all the videos recorded on the selected day		Full Screen
	Start/End video cutting		Backup

Remote Access on Mobile Device



XMeye




iOS




Android

- Download Mobile APP “XMeye” from “Google Play” or “APP Store”.

1. Open the APP and follow on screen instruction to register an account by your email.

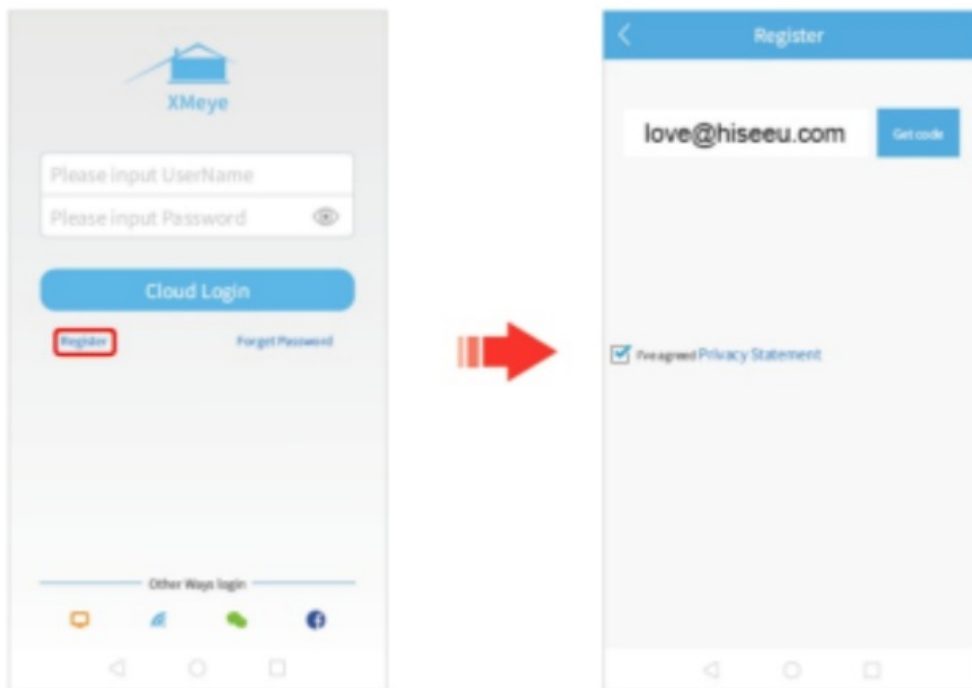

2. Click “+” to add device > Advanced.

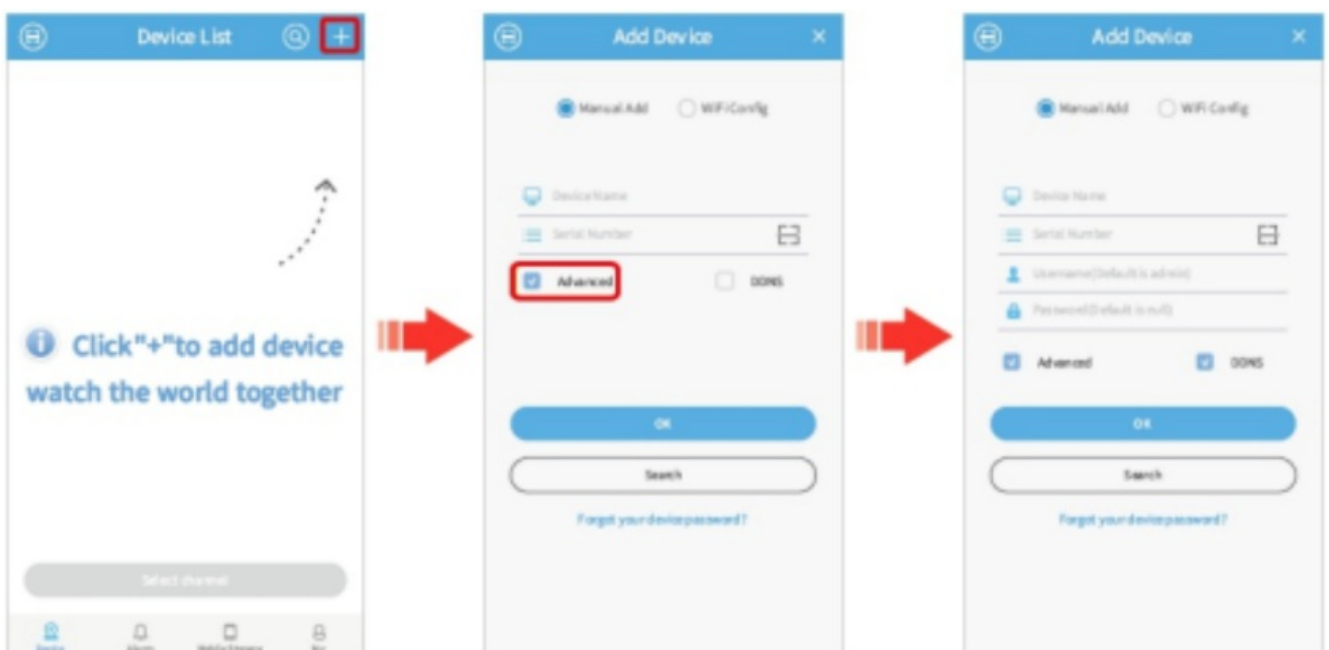


- Device Name:
 - Name Your Device as You Like

- Serial Number:
 - Click the “Scan” icon to Scan NVR’s QR Code. (Navigate to Main Menu > Advanced > Version)
- User Name:
 - admin
- Password:
 - Input your NVR login password.


Remote Access on PC Client

Please contact vendor for PC Client download Link and video instruction.


1. Download PC Client “VMS” and installed.

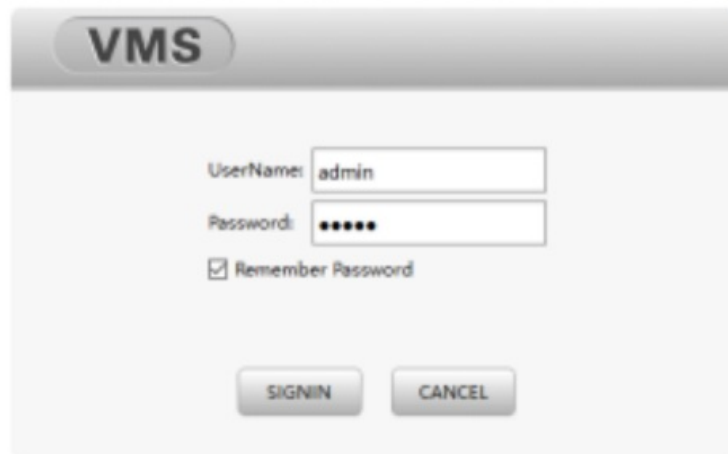

2. Remain the default User Name and Password. Click “SIGN IN”.

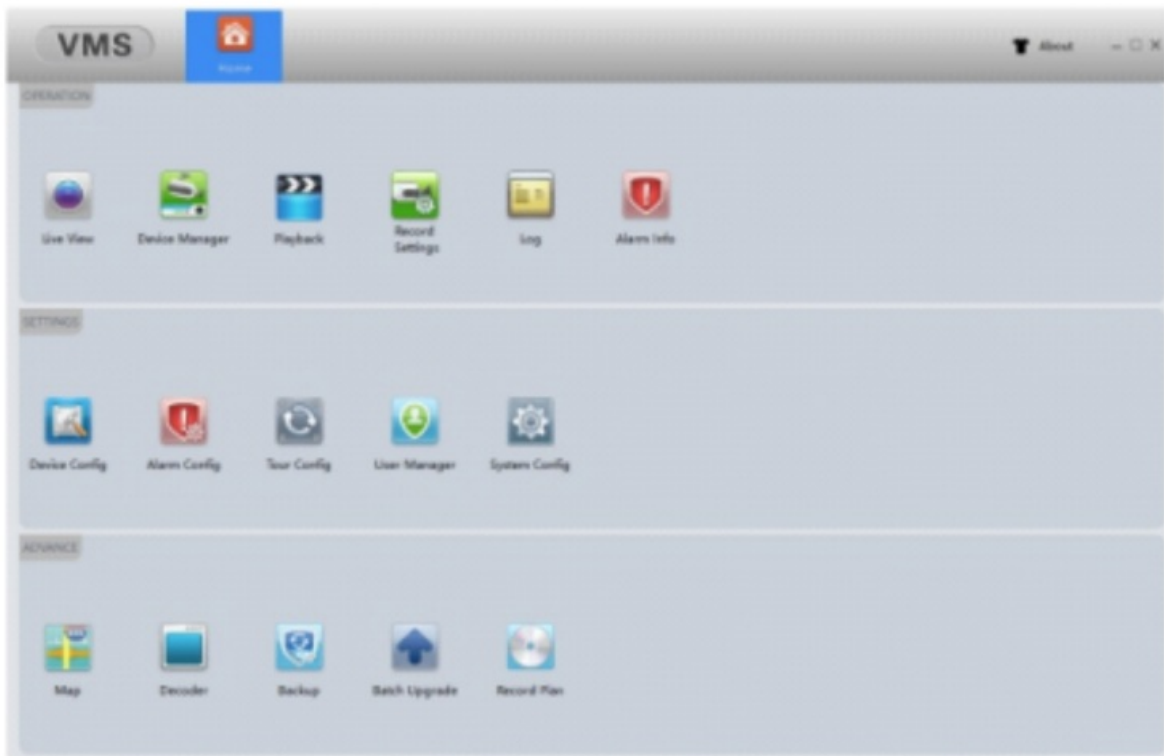


3. Navigate to “Device Manager”.

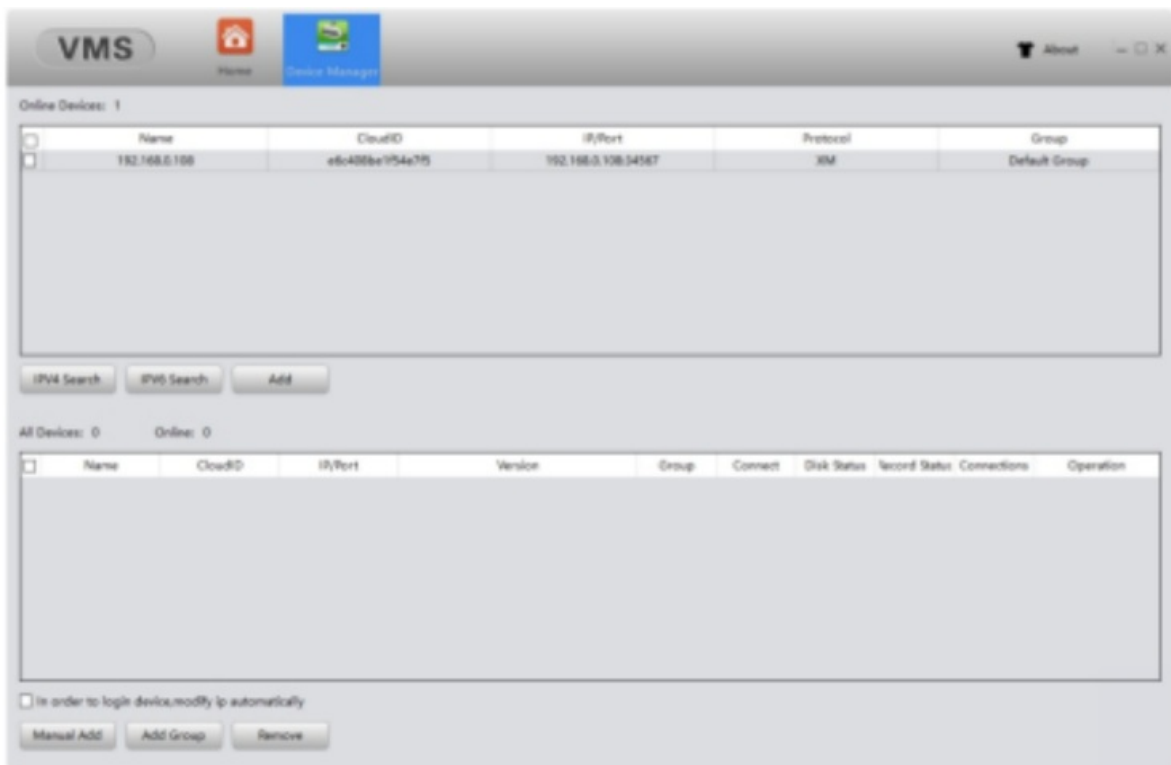

4. Manual Add.

- Device Name:
 - Name Your Device as You Like.
- Serial Number:
 - Click the “Scan” icon to Scan NVR’s QR Code. (Navigate to Main Menu > Advanced > Version)
- User Name:
 - admin
- Password:
 - Input your NVR login password.

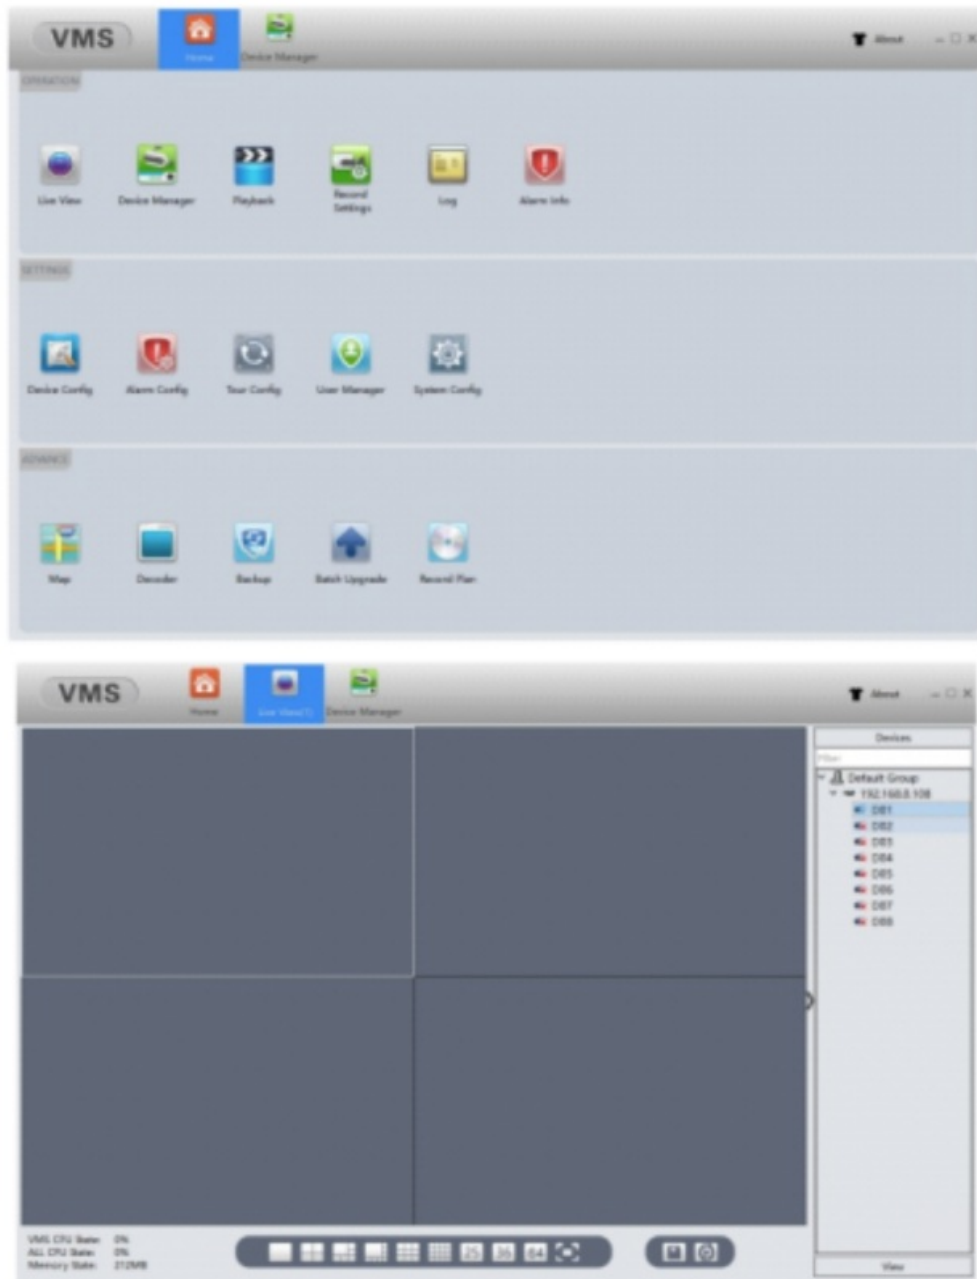

5. Navigate to Home > Live View.

FAQ

- **Q1.** What's the warranty?
 - All of our products with 2-year warranty, any difficulties please contact the vendor.
- **Q2.** How to modify NVR password?
 - Please Right-Click Mouse Navigates to Main Menu > System > Account > Modify Password.
- **Q3.** What should I do if I forget my password?
 - Please Click Forget Password > Forget Answer, you will get the "CAPTCHA" QR code.
 - Open the mobile APP "XMeye", click "+" icon > Forget Your Device Password (FIND PWD).
 - Scan the "CAPTCHA" QR code, you will get a super passcode.
 - Use the super passcode to login your device and modify password. (If device ask for old password, let it blank)
- **Q4.** How to find my NVR' serial number?
 - Please right-click mouse navigates to Main Menu > Advanced > Version.


- **Q5.** How to change my camera's name?
 - Please Right-Click mouse navigates to Main Menu > System > Display > Channel Title "Set".
- **Q6.** What if the hard drive is full?
 - Hard drive will overwrite itself when it's full. You also can format hard drive by navigate to Main Menu > Advanced > HDD info > Format.
- **Q7.** How to get motion alerts on my phone?
 - Please make sure "Motion Detect" was setup properly and enabled "Mobile Report" (Refer to Motion Detect Recording in Page 07).
 - Open "XMeye" mobile App, navigate to Alarm > Alarm Push > Enable "Allow Notifications".
- **Q8.** What should I do if I got too many push notifications from App?
 - Please right-click mouse navigates to Main Menu > Alarm > Intelligent Alert.
 - Customize "Sensitivity", "Region" and "Period" settings, set alerts for certain areas and period to reduce unnecessary alerts.

Contact

Envio Security thanks you for choosing one of its products.
For any problems or questions, do not hesitate to contact us at:

- **Email:** supporto@enviosecurity.com
- **Romanian Phone:** +40755111055
- **Italian Phone:** +3908231502263

Documents / Resources

	<p>ENVIO V1908F85-8E PoE Security Camera System [pdf] User Guide V1908F85-8E PoE Security Camera System, V1908F85-8E, PoE Security Camera System, Security Camera System, Camera System</p>
---	---

References

- [User Manual](#)