

EnVisionLED™
LED-WPF-
SL-3P120 LED
Wall Pack
Light



Envision LED LED-WPF-SL-3P120 LED Wall Pack Light Instruction Manual

[Home](#) » [Envision LED](#) » Envision LED LED-WPF-SL-3P120 LED Wall Pack Light Instruction Manual 

Contents

- [1 Envision LED LED-WPF-SL-3P120 LED Wall Pack Light](#)
- [2 Product Specifications](#)
- [3 Parameters](#)
- [4 Installation-Surface Mounting](#)
- [5 Installation Instructions](#)
- [6 Frequently Asked Questions](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)



Envision LED LED-WPF-SL-3P120 LED Wall Pack Light



Product Specifications

- **Part Numbers:**
 - LED-WPF-SL-3P60-TRI-BZ- UNV-PC
 - LED-WPF-SL-3P120-TRI-BZ- UNV-PC
 - LED-WPF-SL-3P60-TRI-BZ- HV-PC
 - LED-WPF-SL-3P120-TRI-BZ- HV-PC
- **Input Voltage Frequency:** AC120-277V,
 - 50/60Hz
- **Power:**
 - 60/40/30W (AC120-277V)
 - 120/100/80W (AC120-277V)
 - 60/40/30W (AC277-480V)
 - 120/100/80W (AC277-480V)
- **Current Rate:**
 - 0.55A, 1.1A, 0.238A, 0.477A

Parameters

Part No.	Input Voltage	Frequency	Power	Current Rate
LED-WPF-SL-3P60-TRI-BZ- UNV-PC	AC120-277V	50/60Hz	60/40/30W	0.55A
LED-WPF-SL-3P120-TRI-BZ- UNV-PC	AC120-277V	50/60Hz	120/100/80W	1.1A
LED-WPF-SL-3P60-TRI-BZ- HV-PC	AC277-480V	50/60Hz	60/40/30W	0.238A
LED-WPF-SL-3P120-TRI-BZ- HV-PC	AC277-480V	50/60Hz	120/100/80W	0.477A

Installation-Surface Mounting

1. Do not remove any part of the fixture
2. Specification please see the label on the fixture
3. Specified as follows:
 1. Rated Voltage: Min. 600V
 2. Rated connecting capacity: Min. 18AWG
 3. Any necessary preparation of the ends of conductors: The length of exposed ends of conductors not be more than 8mm
4. Please mention the main specifications as follows before wiring.

Warning

1. Before starting the light, please check if the light was damaged during transportation. If any damage is shown, please do not install or use.
2. The product itself and all its components should not be mechanically stressed.
3. Installation must not damage or destroy conducting paths or other parts of the product.
4. Installation of LED products (with power supplies) needs to be made about all applicable electrical and safety standards.
Only qualified personnel should be able to perform installations.
5. Correct electrical polarity needs to be observed. Incorrect polarity may damage or destroy the LED products.
6. If fixing on metallic or otherwise conductive surfaces, there should be an electrical insulator between the product and the mounting surface.
7. All LEDs are static sensitive. Precautions should be taken to ensure the LEDs are well protected from ESD during handling.
Even though the chips are safe in low static-electric discharge events.
8. DO NOT operate LEDs in reverse bias.
9. Damaged by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection
against corrosive agents such as moisture condensation and other harmful elements.
10. Identify positive (+) and negative (-) outputs of the power supply by using a multimeter.
11. The electrical connection should be in a dry area unless tightly sealed.
12. This product series emits high light output. DO NOT look directly into the light-emitting area. Direct exposure to light over an extended period may harm the eyes.
13. If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by the manufacturer their service agent, or a similarly qualified person to avoid a hazard.

- MIN 45°F SUPPLY CONDUCTORS
- SUITABLE FOR WET LOCATIONS
- CAUTION RISK OF FIRE.
- CAUTION RISK OF SHOCK
- THIS PRODUCT MUST BE INSTALLED BY THE APPLICABLE INSTALLATION CODE


Correct Disposal of this Product

This marking indicates that this product should not be disposed of with other household wastes throughout the EU.


To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environment-safe recycling.

Installation Instructions


1. Unscrew the larger tooth plug on the side of the lamp, and use a Phillips screwdriver.

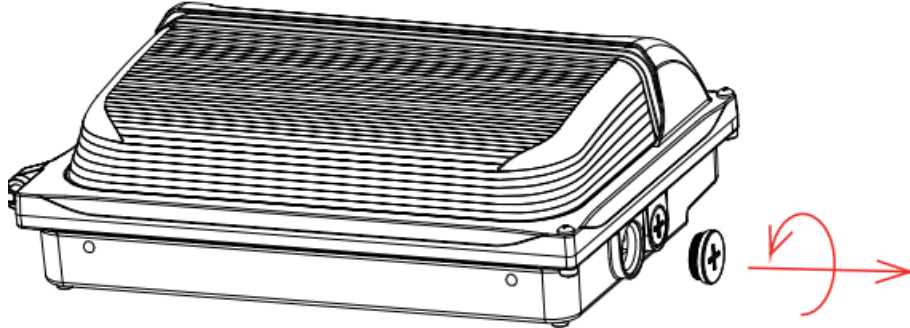


2. Adjust the power, color temperature, and light-sensing switches to the appropriate gear as needed.
If the purchased lamps do not have a color temperature optional or photocell sensor function, the color temperature optional or photocell sensor gear is empty.

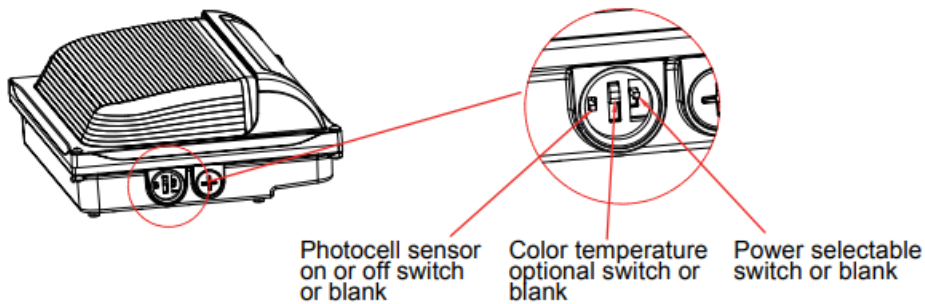


3. Attach the larger tooth plug to the light fixture, using a Phillips screwdriver.

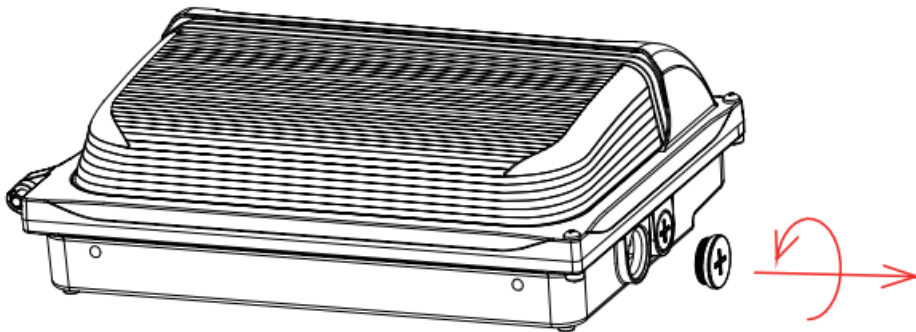


4. Use a screwdriver to unscrew the lamp screws and remove the upper half of the fixture.

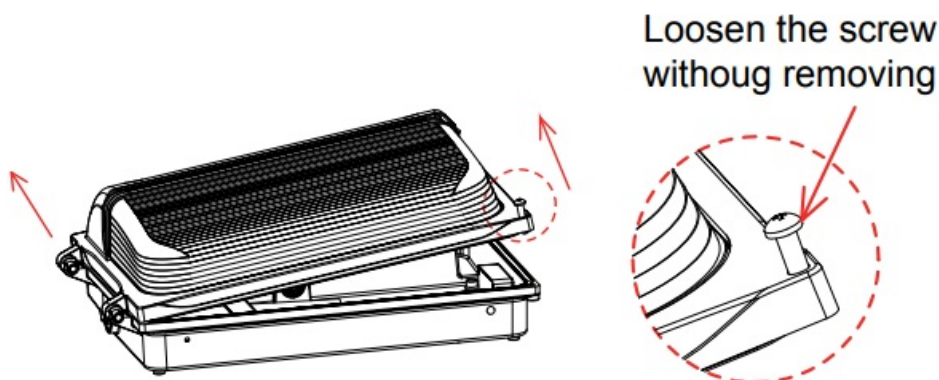


5. Unscrew the cover of the entry hole on the lamp base and remove the cover.

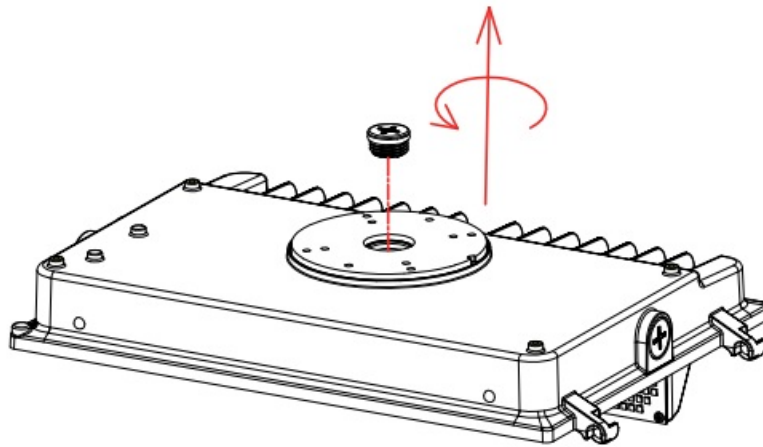


6. According to the embedded terminal box, punch the corresponding mounting hole on the light's mount.

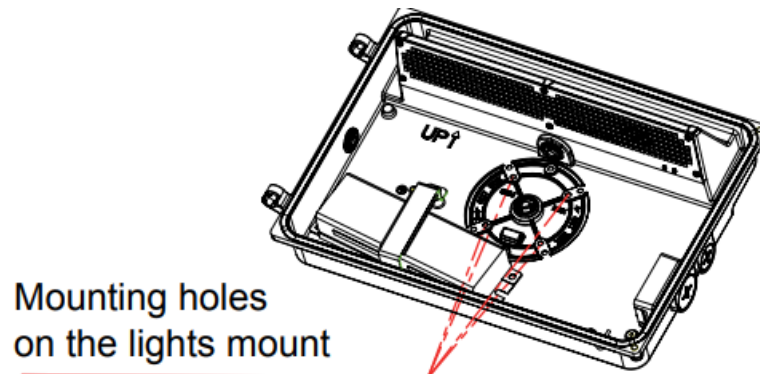


7. Put the input line in the embedded box through the waterproof pad and then pass through the lamp base.

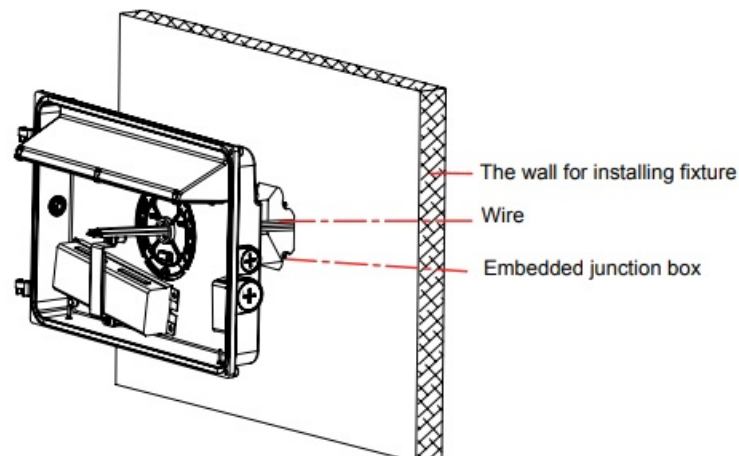


8. Use a screw to lock the lamp base on the embedded junction box and ensure the balance of the horizontal column.

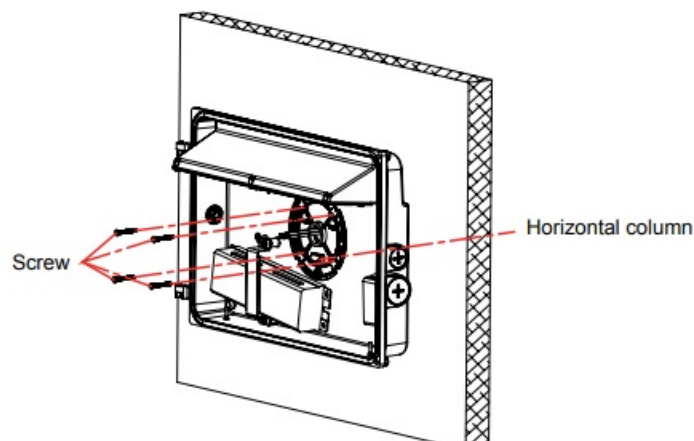


9. Connect the input wire and the dimming wire of the light, then put the connected wires into the embedded terminal box.

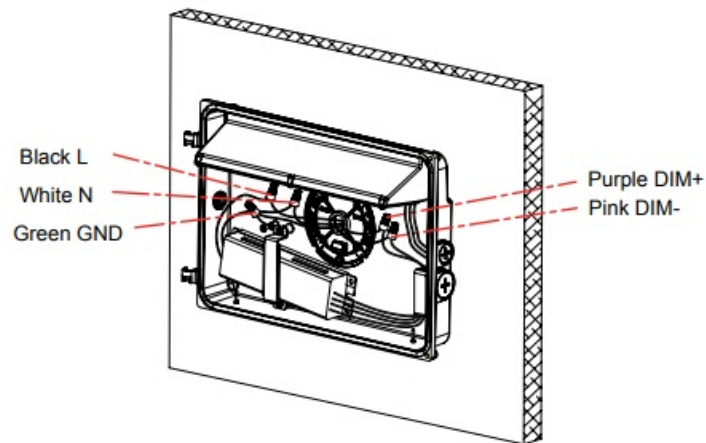


10. Turn the power or color temperature switch to the required position, and pull out the rubber plug at the water leakage hole.

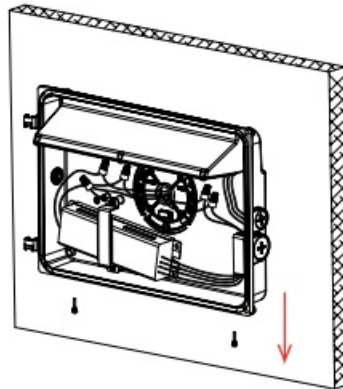

11. Insert the rotating shaft of the upper cover into the rotating shaft hole of the bottom shell.

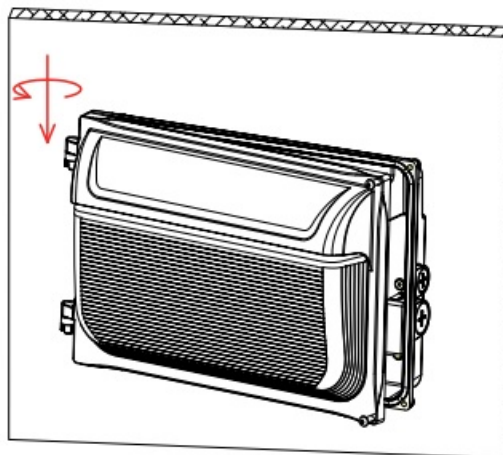


12. Lock the upper cover screws into the bottom shell with a cross screwdriver.

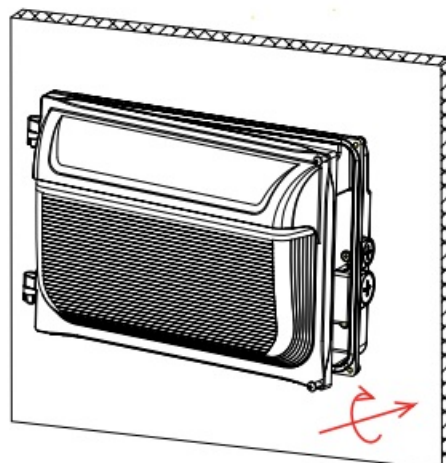

13. Fill the gap between the lamp and the wall with silicone sealant to prevent rainwater from entering the junction

box.

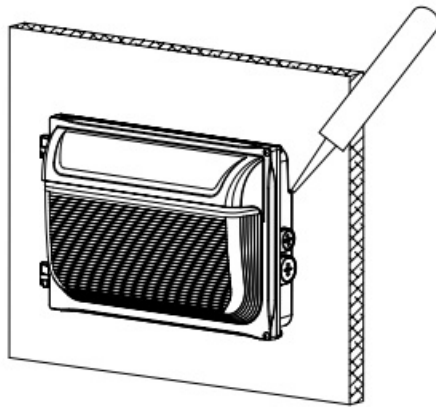


WWW.ENVISIONLEDLIGHTING.COM

Frequently Asked Questions

- **Q: What should I do if the light fixture is damaged during transportation?**
 - **A:** If any damage is observed, do not install or use the light fixture. Contact customer support for assistance.

Documents / Resources

	<p>Envision LED LED-WPF-SL-3P120 LED Wall Pack Light [pdf] Instruction Manual LED-WPF-SL-3P60-TRI-BZ-UNV-PC, LED-WPF-SL-3P120-TRI-BZ-UNV-PC, LED-WPF-SL-3P60-TRI-BZ-HV-PC, LED-WPF-SL-3P120-TRI-BZ-HV-PC, LED-WPF-SL-3P120 LED Wall Pack Light, LED-WPF-SL-3P120, LED Wall Pack Light, Pack Light, Light</p>
---	--

References

- [LED Envision Led - Envision LED Lighting](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.