

# EXIT CR-7037 LED Emergency Sign Instruction Manual

**Contents**

- 1 INSTALLATION INSTRUCTIONS FOR EMERGENCY LIGHTING
  - 1.1 Package Contents
  - 1.2 Warnings and Cautions
  - 1.3 Mounting Instructions
    - 1.3.1 Wall mounting
    - 1.3.2 Side or Ceiling Mounting
- 2 Documents / Resources
  - 2.1 References

## INSTALLATION INSTRUCTIONS FOR EMERGENCY LIGHTING

**Package Contents**

Part	Description	Quantity
1	Emergency Lighting	1
2	Hardware Kit	1




**Warnings and Cautions**

## READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances and the National Electric code.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Do not use outdoors.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surface.
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommend by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by qualified personnel only.
11. Allow battery to charge for 24 hours before first use.
12. For connection to a singles ource of supply such that all lamps are simultaneously illuminated.

### SAVE THESE INSTRUCTIONS

Use Flexible Conduit Only



### Mounting Instructions


---

**NOTE: First turn off electricity.**

1. Remove mounting plate from fixture.




2. Knockout in back of mounting plate and push wires through the hole.



## 1. Mounting Plate

3. Securely attach mounting plate to J-box (not provided).

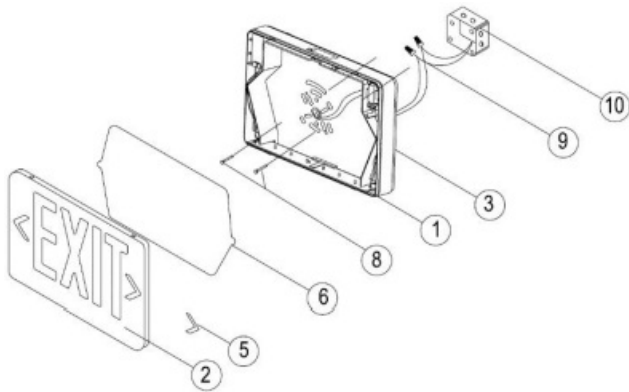


## 4. ELECTRICAL CONNECTIONS

Make the proper supply wire connections.

If using 120VAC, connect the black and White wires to the building utility.


If using 277VAC, connect the Orange and White wires to the building utility.

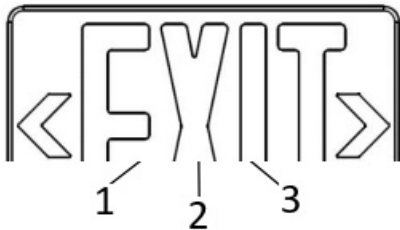

1. Black 120VAC INPUT
2. White Neutral
3. Orange 277VAC INPUT

5. Connect the battery to connector on the PCBA.

### Wall mounting

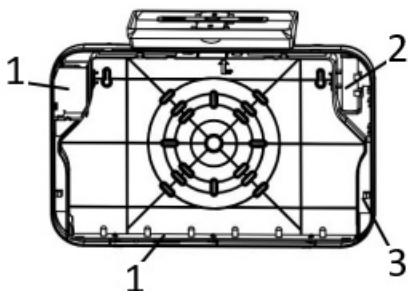

1. PCB
2. Battery


3. Battery plug

6. Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.

7. Restore power and press test button. Battery powered LED will come on, AC light will turn off.


#### Side or Ceiling Mounting

1. Open top cover and knockout on the top of fixture.
2. Secure the mounting plate to tube with nut.
3. Push the wires through "A" for ceiling mounting

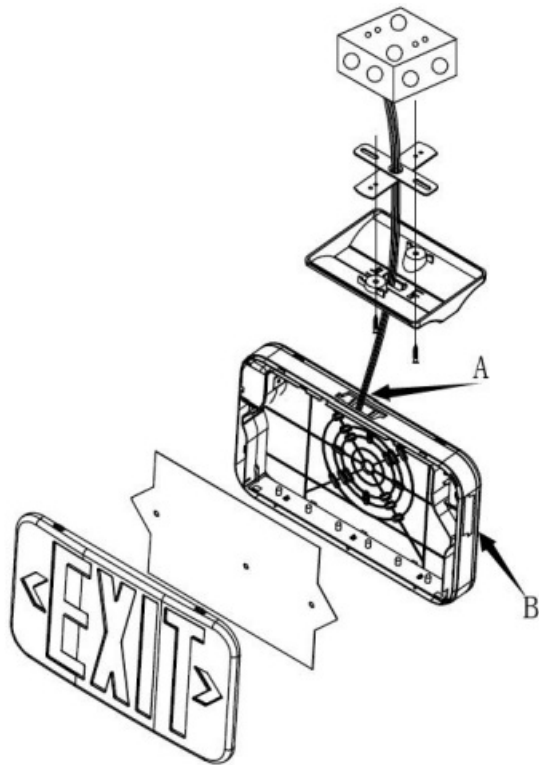

4. Reference step 4-8 in wall mounting above for side or ceiling mounting.

## Documents / Resources

	<p><a href="#">EXIT CR-7037 LED Emergency Sign</a> [pdf] Instruction Manual</p> <p>CR-7037 LED Emergency Sign, CR-7037, LED Emergency Sign, Emergency Sign, Sign</p>
-------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.