


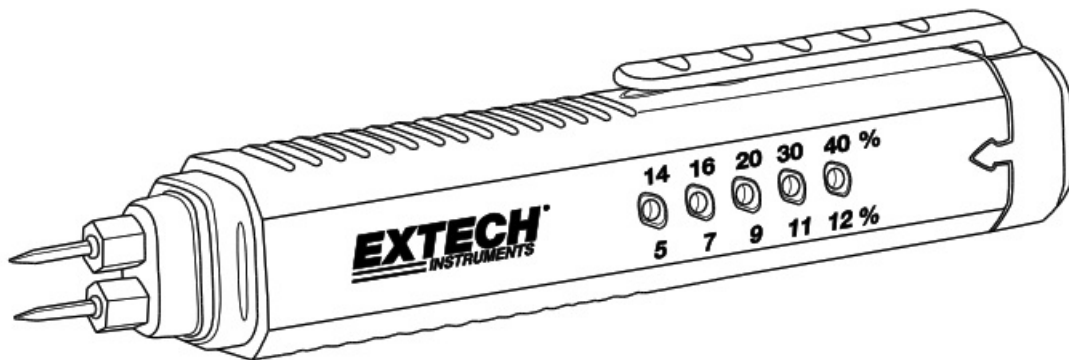


EXTECH MO25 Moisture Meter User Guide

[Home](#) » [EXTECH](#) » EXTECH MO25 Moisture Meter User Guide 

EXTECH[®]

MO25 MOISTURE METER USER GUIDE



Contents

- [1 Introduction](#)
- [2 Description](#)
- [3 Operation](#)
- [4 Battery Check and Replacement](#)
- [5 Specifications](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)


Introduction

The MO25 measures moisture (%WME) in wood, brick, concrete, paper, & fabric and traces leakage inside walls,

ceilings, and floors.

Description

1. Contact pins (replaceable)
2. Power/Hold button
3. LED lamps
4. Pocket clip
5. Battery compartment

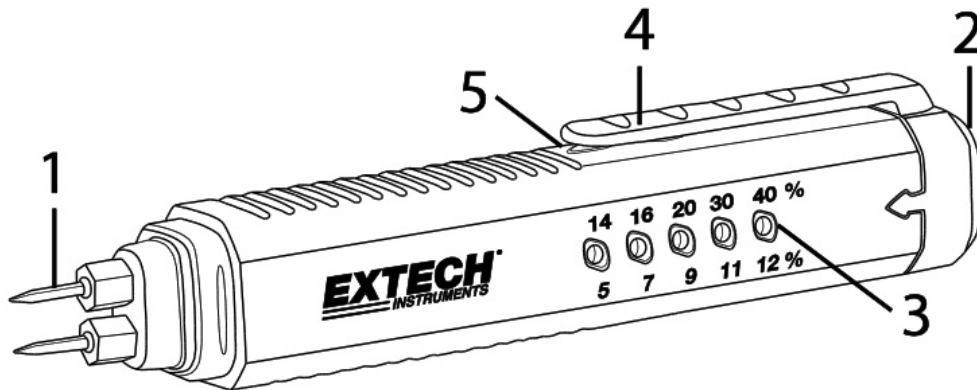

Operation

CAUTION: Electrode pins are extremely sharp, use care. Cover the pins with the protective cap when instrument is not in use.

1. Press and hold POWER button for 3 seconds to switch ON or OFF. One LED lamp flashes when the meter is ON idling. The meter automatically switches OFF after 1 minute (if reading is <5%).
2. Remove the protective cap to expose electrode pins.
3. Carefully push the pins into the material under test. Insert the pins perpendicular to wood's fiber structure.
4. Take several readings in various locations for the best representation of the moisture present.
5. Read the LED lamps as follows:
Green LED scale indicates wood moisture from 5.0 to 12.0%.
Red LED scale indicates wood moisture from 14.0 to 40.0%.
6. Press POWER/HOLD button momentarily to freeze a measurement reading. Press again to disable the Hold function.
7. Replace the protective cap when finished.

Battery Check and Replacement


When the unit powers up the status of the battery is indicated by the 5 LED lamps (5 lamps lit: full power; 1 lamp lit: minimum power). To replace the battery remove the Phillips head screw to access the battery compartment and then replace the 1 x 1.5VDC 'AAA' battery. Please secure the compartment before use.

Specifications

Display	Dual scale red and green LED lamps
Measurement principle	Electrical resistance
Measurement Range	5 to 40 %WME
Electrode pins	Integrated, replaceable
Auto Power OFF	After 1 minute (with reading <5%)
Power supply	1×1.5VDC AAA battery
Battery status indicators	Lamps indicate status on power-up
Meter housing	Impact-proof plastic
Dimensions	136 x 25 x 21mm (5.4 x 1.0 x 0.8")
Weight	33g. (1.2 oz.) without battery

Copyright © 2022 FLIR Systems Inc.
All rights reserved including the right of
reproduction in whole or in part in any form
ISO-9001 Certified
www.extech.com
EXTECH®

Documents / Resources

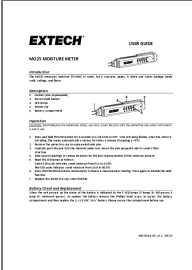	<p>EXTECH MO25 Moisture Meter [pdf] User Guide MO25 Moisture Meter, MO25 Meter, MO25, Moisture Meter, Meter</p>
---	---

References

- 🔗 [Extech is now on FLIR.com | Teledyne FLIR](#)
- 🔗 [Extech is now on FLIR.com | Teledyne FLIR](#)