



# EZVIZ CS-DP2-A0-6E2WPFBS 1080p Smart Door Viewer Camera User Guide

[Home](#) » [ezviz](#) » EZVIZ CS-DP2-A0-6E2WPFBS 1080p Smart Door Viewer Camera User Guide 

## Contents

- [1 EZVIZ CS-DP2-A0-6E2WPFBS 1080p Smart Door Viewer Camera](#)
- [2 Box Content](#)
- [3 Overview](#)
- [4 Installation](#)
- [5 EZVIZ Connect](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)



**EZVIZ CS-DP2-A0-6E2WPFBS 1080p Smart Door Viewer Camera**



COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as “EZVIZ”). This user manual (hereinafter referred to as “the Manual”) cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual. About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the <sup>TM</sup> website (<http://www.ezvizlife.com>). Revision Record

New release – January, 2021

Trademarks Acknowledgement

<sup>TM</sup>, <sup>TM</sup>, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED “AS IS”, WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT. EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS. REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS

PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES. IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

## Attention

- Do not expose the camera to the harsh environment like high temperature, humid, salt mist or rain, otherwise, the device may be damaged.
- Do not press the sensor or lens of the camera, otherwise, the device may be damaged.
- Do not pull the wire of the camera hard, and protect yourself from being cut by the wire. Damage to the wire due to inappropriate operation is not included in the warranty.
- Use the exclusively power adapter to charge the panel, otherwise, the system may be damaged.

## Box Content



Camera (x1)



Panel (x1)



Mounting Base (x1)



Screws (x6)



Power cable (x1)




Regulatory Information (x1)



Quick Start Guide (x1)

## Overview


### Panel

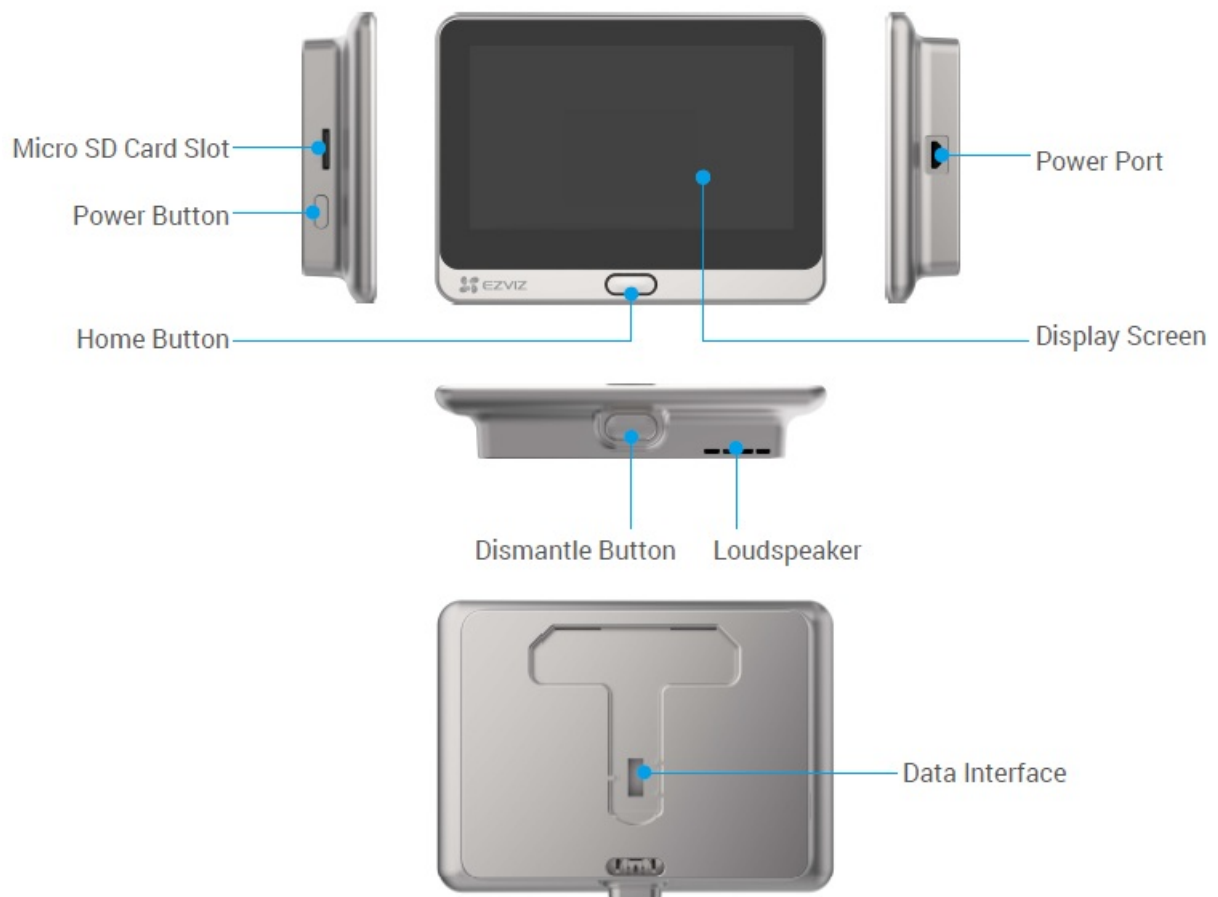

## Camera




## Mounting Base

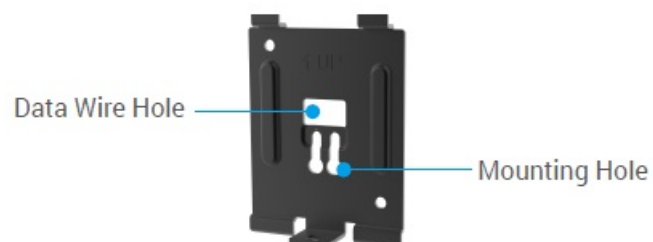

## Get the EZVIZ App

- Connect your mobile phone to Wi-Fi using your 2.4GHz network (suggested).
- Download and install the EZVIZ app by searching “EZVIZ” in the App Store or Google Play™.
- Launch the app and register an EZVIZ user account.

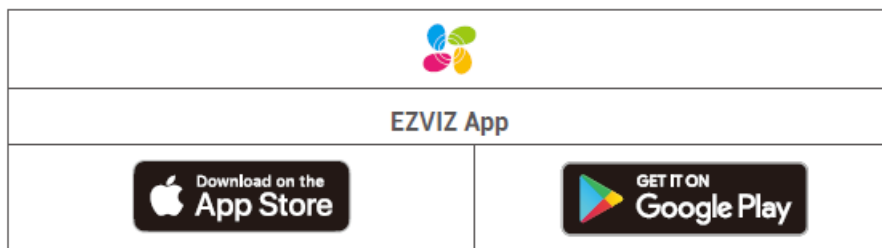

If you have already used the app, please make sure that it is the latest version. To find out if an update is available, go to the app store and search for EZVIZ.

## Installation

Install the Micro SD Card (Optional)

1. Insert the micro SD card (sold separately) into the card slot as shown in the figure below.



2. In the EZVIZ app, tap the Storage Status in the Device Settings interface to check the SD card status.
3. If the memory card status displays as Uninitialized, tap to initialize it. The status will then change to Normal and it can store videos.

## Install the peephole

If you already have a peephole, install the device in the same place. If not, please drill a hole of diameter about 16.5mm (no more than 45mm) and about 145cm distance from the ground to have a good viewing effect.

- 1.



Measure the door's thickness and select the appropriate screws.

Thickness	Screw
35 to 60mm	
60 to 85mm	
85 to 105mm	

2. Turn the screws into the back of camera.



3. Tear off the release paper.



4. Pass screws and wire through the door. You can roll up the paper to help.



5. Adjust camera's position and push it close to the door gently.



6. Pass screws and wire through the mounting base.



7. Adjust the mounting base's position and tighten the screw.




8. Connect the panel with the camera's wire.



9. Put the panel into the mounting base.



10. Hold the dismantle button until the panel is well buckled.



11. Installation complete.



## Power on

1. Hold the power button for 3 seconds to power on the panel.



2. Tap the Home button to choose your language and press the Power button to confirm.



## Add to EZVIZ App




- Log in the EZVIZ app.
- On the Home screen, tap “+” on the upper-right corner to go to the scan QR code page.
- Scan the QR code.
- Follow the EZVIZ app wizard to finish Wi-Fi configuration.

If you failed to get the QR code or want to reconfigure Wi-Fi, please hold the Home button for 5 seconds to reset and repeat the steps above.

### **Charge the Panel**

Connect the panel with the power outlet via power adapter (5V 2A, sold separately).

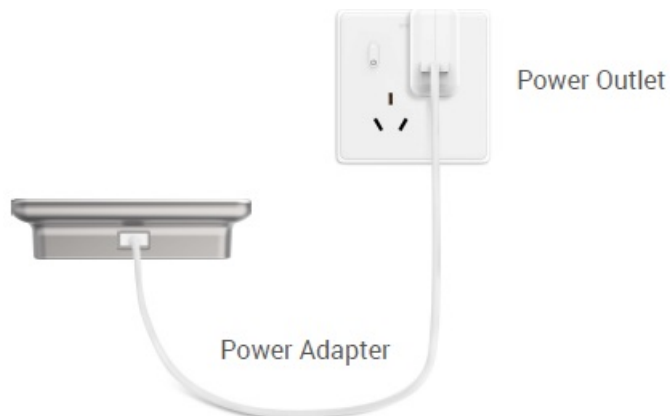

You can also take off the panel to charge by holding the dismantle button to remove it from the mounting base. Please disconnect the wire carefully.


### **Restore to Factory Settings**

When the device is normally running, press the Home button for 5 seconds and confirm to restore the device to factory settings.







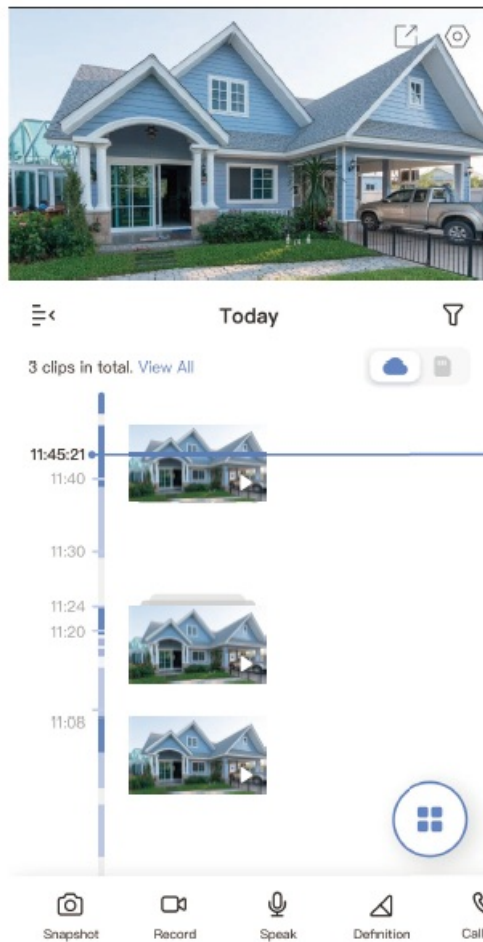



### **Live View**


The app interface may be different due to version update, and the interface of the app you installed on your phone shall prevail.

Launch the EZVIZ app, tap Live View button, you can view and listen to a live feed, take snapshots, record videos, and choose video definition as needed.



Swipe left and right across the screen to see more icons.

Icon	Description
	Share. Share your device.
	Settings. View or change the device settings.
	Snapshot. Take a snapshot.
	Record. Manually start/stop recording.
	Speak. Start using talk and listen.
	Definition. Select video resolution from Ultra HD, Hi-Def or Standard.
	Call Log. View call logs.
	Multi-screen Live. Tap to select live view window layout.
	Please refer to the actual interface for specific information.
	<b>Settings</b> In the settings page, you can set the parameters of the device.

Parameter	Description
Name	Customize the name of your device.
Working Mode	<ul style="list-style-type: none"> <li>• User Mode: Customize parameters like detection sensitivity and loitering duration</li> <li>• Performance Mode: Under this mode, the device performance will be improved, but the power consumption will be increased.</li> <li>• Power Saving Mode: Adjust the sensitivity and other parameters to extend battery life.</li> <li>• Super Power-saving: Sleep Mode is on. Active live view can wake up the camera.</li> <li>• Configure Working Mode: Customize the working mode in different periods.</li> </ul>
Intelligent Detection	<p>You can customize the detection notification by changing the value of detection sensitivity. The higher sensitivity is, the easier people farther to the device can be detected.</p> <ul style="list-style-type: none"> <li>• Basic Detection(Required) <ul style="list-style-type: none"> <li>• PIR Infrared Detection: Higer sensitivity, farther detectable distance.</li> </ul> </li> <li>• Advanced Detection <ul style="list-style-type: none"> <li>• Loitering detection: when enabled, if people keep loitering around the doorway for longer than the period you have set up, alarms will be triggered. This function is used to avoid loitering.</li> </ul> </li> </ul> <p> Devices will alert based on the selected mode, including device-side alerts and App-side message notifications.</p>
Notification	You can set the notification from the device-side and app-side.
Audio	When disabled, both live view and record videos will not have audio.
Image	<ul style="list-style-type: none"> <li>• Auto(Recommended): Auto-Switch Day/Night Mode.</li> <li>• Day and Night Switch Sensitivity.</li> <li>• Enforcing Day Mode: IR mode stays off</li> <li>• Enforcing Night Node: IR mode stays on, with clear images in dark environment.</li> </ul>
Light	When disabled, the doorbell indicator will be off.
Battery	You can see the battery capacity.
Cloud Storage	You can subscribe and manage the cloud storage.
Record List	You can see the device storage status, include cloud storage and memory card.
Security Settings	<ul style="list-style-type: none"> <li>• Video Encryption: When enabled, your videos will be encrypted.</li> <li>• Change Encryption Password: You can change your password.</li> </ul>
Network	<ul style="list-style-type: none"> <li>• You can see the Wi-Fi that the device has connected to, and you can tap to change to another Wi-Fi.</li> <li>• Static DNS: If enabled, you can customize the DNS address.</li> <li>• Wi-Fi Sleep Mode: You can choose the Wi-Fi Sleep mode. <ul style="list-style-type: none"> <li>• Low Power Mode</li> <li>• Ultra-Low Power Mode</li> </ul> </li> </ul>
Device Information	You can see the device information here.
Share the Device	Enter an email address or phone number to invite and grant device permissions to a family member or guest.
Delete Device	Tap to delete the camera from your EZVIZ account.

## EZVIZ Connect

### 1. Use Amazon Alexa

These instructions will enable you to control your EZVIZ devices with Amazon Alexa. If you run into any difficulties during the process, please refer to Troubleshooting.

### Before you start, make sure that:

1. EZVIZ devices are connected to the EZVIZ app.
2. In the EZVIZ app, turn off the “Image Encryption” in the Device Settings page.
3. You have an Alexa-enabled device (i.e Echo Spot, Echo-Show, All-new Echo-Show, Fire TV (all generations), Fire TV stick (second generation only), or Fire TV Edition smart TVs).
4. The Amazon Alexa app is already installed on your smart device, and you have created an account.

### To Control EZVIZ devices with Amazon Alexa:

1. Open the Alexa app and select “Skills and Games” from the menu.
2. On the Skills and Games screen, search for “EZVIZ”, and you will find “EZVIZ” skills.

3. Select your EZVIZ device's skill, then tap **ENABLE TO USE**.
4. Enter your EZVIZ username and password, and tap **Sign in**.
5. Tap the **Authorize** button to authorize Alexa to access your EZVIZ account, so that Alexa can control your EZVIZ devices.
6. You will see "EZVIZ has been successfully linked", then tap **DISCOVER DEVICES** to allow Alexa to discover all your EZVIZ devices.
7. Go back to Alexa app menu and select "Devices", and under devices you will see all your EZVIZ devices.

### **Voice Command**

Discover a new smart device via the "Smart Home" menu in the Alexa app or the Alexa Voice Control function. Once the device is found, you can control it with your voice. Speak simple commands to Alexa.

Your device's name for example: "show xxxx camera," can be changed in the EZVIZ app. Each time you change the name of the device, you

will need to discover the device again to update the name.

### **Troubleshooting**

What should I do if Alexa fails to discover my device?

Check if there are any Internet connecting problems.

Try to restart the smart device and re-discover the device on Alexa.

Why the device's status is "Offline" on Alexa?

Your device might have been disconnected from the network. Restart the smart device and re-discover on Alexa.

Check if your router is connected to the Internet and try again.

For details about countries where Amazon Alexa is available, see Amazon Alexa's official website.

### **Use Google Assistant**

With the Google Assistant, you can activate your EZVIZ device and watch live by speaking Google Assistant voice commands.

The following devices and apps are required:

1. A functional EZVIZ app.
2. In the EZVIZ app, turn off the "Image Encryption" and turn on the "Audio" in the Device Settings page.
3. A TV with functional Chromecast connecting to it.
4. The Google Assistant app on your phone.

### **To get started, follow the steps below:**

1. Set up the EZVIZ device and make sure it works properly on the app.
2. Download the Google Home app from the App Store or Google Play Store™ and log into your Google account.
3. On the Myhome screen, tap "+" on the upper-left corner, and select "Set up device" from the menu list to go to the Set up interface.
4. Tap **Works with Google**, and search for "EZVIZ", where you will find "EZVIZ" skills.
5. Enter your EZVIZ username and password, and tap **Sign in**.
6. Tap the **Authorize** button to authorize Google to access your EZVIZ account, so that Google can control your EZVIZ devices.
7. Tap **Return to app**.
8. Follow the above steps to complete the authorization. When synchronization is completed, EZVIZ service will

be listed under your list of services. To see a list of compatible devices under your EZVIZ account, tap on the EZVIZ service icon.

9. Now try some commands. Use the name of the camera that you created when you set up the system.

Users can manage devices as a single entity or in a group. Adding devices to a room allows users to control a group of devices at the same time using one command.

See the link for more information:

<https://support.google.com/googlehome/answer/7029485?co=GENIE.Platform%3DAndroid&hl=en>

For additional information about the device, please refer to [www.ezviz.eu](http://www.ezviz.eu).

**Documents / Resources**

	<p><a href="#">EZVIZ CS-DP2-A0-6E2WPFBS 1080p Smart Door Viewer Camera</a> [pdf] User Guide CS-DP2-A0-6E2WPFBS, 1080p Smart Door Viewer Camera, CS-DP2-A0-6E2WPFBS 1080p Smart Door Viewer Camera, Smart Door Viewer Camera, Door Viewer Camera, Viewer Camera, Camera</p>
---	--

**References**

-  [EZVIZ - Creating Easy Smart Homes](#)
-  [EZVIZ - Creating Easy Smart Homes](#)