

**More than security
A lifestyle upgrade**



Mobile Pro II

Mobile PERS Series

- Features a built-in sound amplification for hands-free, two-way communication
- Compact and portable design perfect for on-the-go use
- Intuitive three-button design for easy operation

Mobile Pro II

Mobile PERS Series



Compact and lightweight design for on-the-go use.



Three intuitive buttons: Help, Alarm Cancel, and Test Connection.



Sound amplification enables hands-free, two-way communication with monitoring centers.



User-friendly, contactless charging cradle for simplified charging.

Mobile Pro II is a next-generation Telecare alert system that combines a Telecare alarm panel and a 4G/LTE PERS locator. It consists of the smaller locator Mobile Lite R23-6P and the three-button New Base 3. With its lightweight and more compact design compared to previous models, the locator caters perfectly to seniors' on-the-go convenience.


Mobile Lite R23-6P's newly designed compact case design makes it easy to carry around. In addition to incorporating both GPS and Wi-Fi positioning technologies, it features fall detection for timely assistance and a step count feature to encourage activity. Moreover, the Mobile Lite R23-6P is compatible with various RF accessories, including emergency pendants with fall detection and wrist transmitters, making it a versatile choice for different needs.

When placed on the New Base 3, Mobile Lite R23-6P can charge easily on the contactless cradle. The New Base 3 also amplifies the sound of Mobile Lite R23-6P, allowing seniors to keep their hands free for emergency situations while communicating at home. The New Base 3's three intuitive buttons—Help, Alarm Cancel, and Test Connection—make it user-friendly for seniors.

Mobile Pro II also facilitates remote monitoring through Climax's Care Alert Platform, offering comprehensive security for the elderly.


Integrated 3W Speaker for Sound Amplification

New Base 3's built-in 3W speaker provides clear, hands-free, two-way communication with monitoring centers to ensure effortless interactions during emergencies.

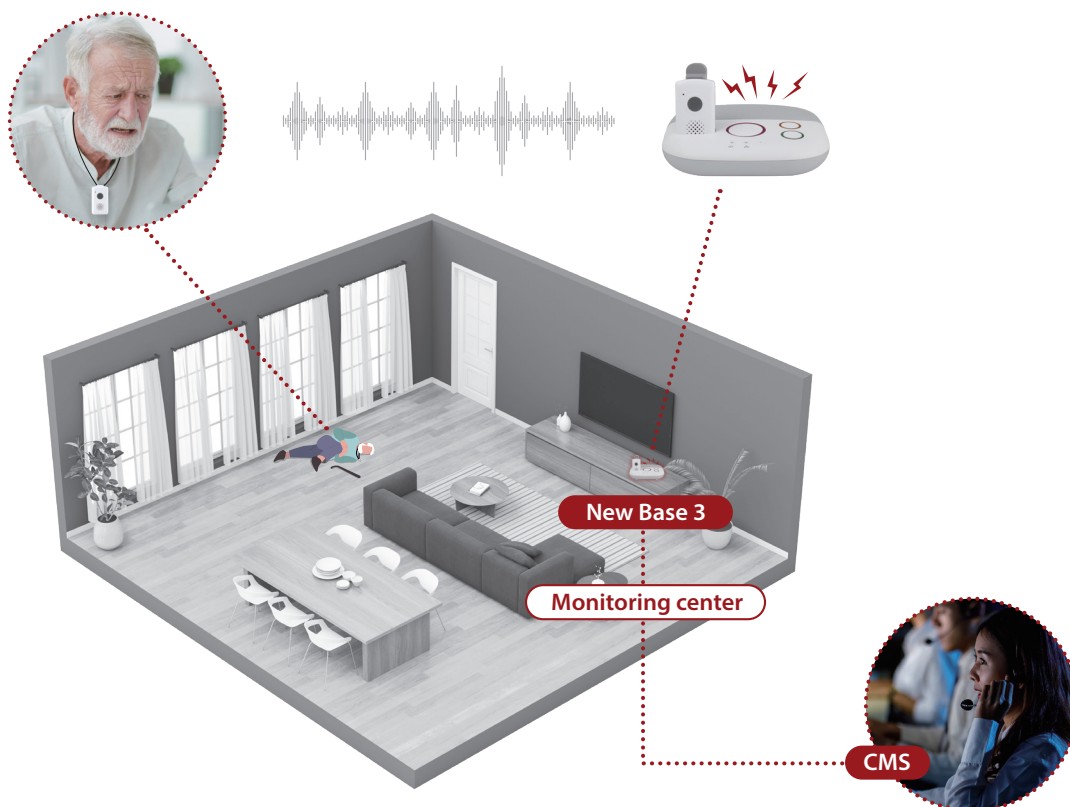

Compact and Lightweight PERS Locator

The slimmer, more compact design of Mobile Lite R23-6P makes it easy for seniors to carry, whether at home or on the go.

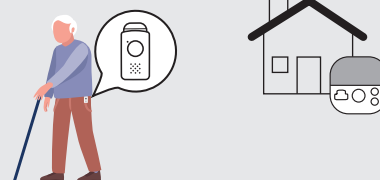


Versatile Wearing Options for PERS Locator

Multiple ways to wear the Mobile Lite R23-6P include clipping it onto clothing, wearing it as a pendant, or placing it in a bag, catering to the different needs of seniors.



How can Care Personnel and Family Members Locate You?

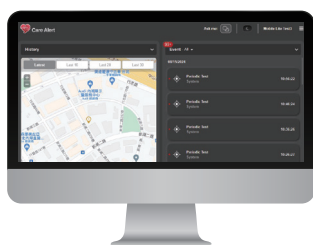

Online Platform

Positional information is available on online platform & app.



Smartphone APP

Via the app, emails, or SMS messages, smartphones can be used to view the user's location information.

• Map service is powered by Google Maps data.

Mobile Lite R23-6P

- Telecare alarm system for indoors and on-the-go
- Slim and lightweight design
- Enhanced location accuracy with GPS & Wi-Fi technologies
- Built-in fall detection and step count
- Integration emergency pendants and wrist transmitters



New Base 3

- Intuitive three-button design
- Built-in 3W speaker for sound amplification to ensure convenient two-way hands-free communication
- Location coordinates viewable on Climax's online platform
- Voice prompt
- Remote & Local programming

Specifications

Mobile Lite R23-6P

RF Frequencies	EU: 869 MHz / US: 919 MHz
SIM Card	Supports micro SIM cards
4G/LTE Frequencies	EU: B1 (2100 MHz) / B3 (1800 MHz) / B7 (2600 MHz) / B8 (900 MHz) / B20 (800 MHz) / B28 (700 MHz) US: B2 (1900MHz) / B4 (1700MHz) / B5 (850MHz) / B12 (700MHz) / B13 (700MHz)
3G Frequencies	EU: B1 (2100 MHz) / B8 (900 MHz) US: B2 (1900MHz) / B4 (1700MHz) / B5 (850MHz)
Power Source	3.8V, 800mAh Lithium rechargeable battery x 1
Battery Life	5.6 days (Normal mode); 8 days (Sleep mode)*
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	66.2 mm x 38.1 mm x 16 mm

New Base 3

Frequencies	EU: 869 MHz / US: 919 MHz
Power Source	12V, 1A adapter
Backup Battery	1100 mAh, Ni-Mh rechargeable battery pack
Backup Battery Life	30 hours*
Speaker	3W, Ø66
Volume	Up & Down Buttons, 5 levels control
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	167.95 mm x 164.98 mm x 52.92 mm

* Note: Actual battery life may vary with product settings, operating environment, and usage patterns.

Ordering Information

Mobile Lite R23-6P 4G/LTE PERS Locator

New Base 3 Telecare Alarm Panel