



Contents [[hide](#)]

- [1 fifine SC3 Audio Mixer](#)
- [2 GUIDELINE FOR USE](#)
- [3 WHAT'S IN THE BOX](#)
- [4 SPECIFICATION](#)
- [5 INTERFACE AND FUNCTION KEYS INSTRUCTION](#)
- [6 WARRANTY](#)
- [7 CERTIFICATION](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)




fifine SC3 Audio Mixer



GUIDELINE FOR USE

PC/MAC setup

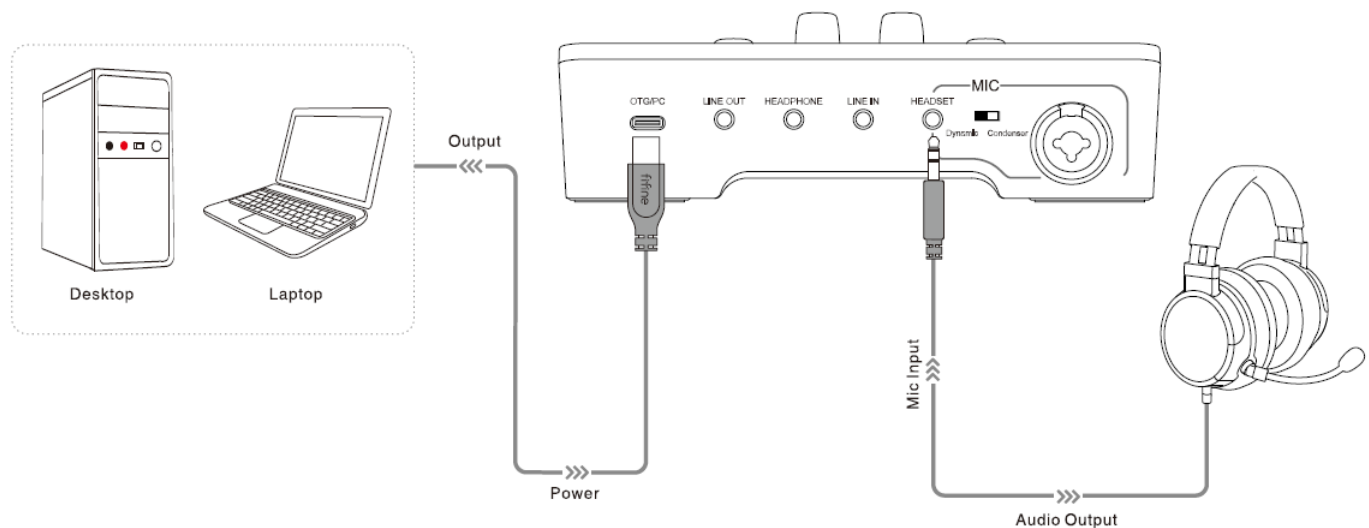

1. Connect your desktop/laptop with the SC3 Audio Mixer via USB cable.
2. Computer Setting: Select "Microphone (fifine SC3)" as input device and select "Speaker (fifine SC3)" as output device.
3. Plug a compatible 3.5mm headset into the Headset Port of SC3 Audio Mixer.

WHAT'S IN THE BOX

- 1X Gaming Audio Mixer
- 1X USB Cable
- 1X 3.5mm to 3.5mm Audio Cable
- 1X User's Manual

SPECIFICATION

Microphone Input

- Frequency Response: 25Hz-20 KHz
- Microphone Interface: XLR or 1/4" Mic
- S/N Ratio: 75dB
- THD+N: <0.2%

Auxiliary Input or Optical Input

- Frequency Response: 20Hz-20KHz
- S/N Ratio: 90dB
- THD+N: <0.2%

Headphones Output

- Frequency Response: 20Hz-20 KHz
- Headphones Interface: 3.5mm
- S/N Ratio: 93 dB
- THD+N:
- Power: 38mW@32Ω

OTG

- Data Transmission: USB 2.0 or above
- Sampling Rate: 44.1-48KHz
- Bit Depths: 16-bit/24-bit

IMPORTANT NOTICE

1. PC Setting: “Speaker Properties” -“Level”-Make sure to turn on the “speaker icon” under “Microphone” before monitoring the mixer’s input channel.
2. Select “fine SC3” as the default input device on the system level to save extra settings for different software.
3. Confirm if your XLR condenser mic requires 48V phantom power before turning it on.
4. If the Headset interface and the combo input interface are connected at the same time, the mixer will give priority to the Headset recording.
5. The electric tone and voice change function cannot be used at the same time.
6. Please come to our website for more technical support.

INTERFACE AND FUNCTION KEYS INSTRUCTION



Back Panel

1. USB-C Port
2. Line Out Port
3. Headphone Output Interface
4. Line In Port
5. Headset(Input & Output) Interface
6. Dynamic/Condenser Switch
7. XLR&6.35mm Combo Input Interface

Front Panel

8. 48V Phantom Power-Short press to turn on or off 48V Phantom Power.
9. Electric Button-Switch electric tone, and there are 12 kinds of tones.
(Only available for microphone recording.)
10. Customized Button-Used to customize sound effects recording and playback.
11. RGB Button-Long press and hold to turn on/off, and short press to switch.
12. Voice Change-Long press and hold to turn on/off, and short press to change voice mode.
13. Microphone Mute-Short press to mute or unmute the MICROPHONE channel.
14. Line In Mute-Short press to mute or unmute the channel LINE.
15. Mic Monitor-Short press to turn on/off the microphone real-time monitoring.
16. Line Out Mute- Short press to mute or unmute the LINE OUT channel.
17. Mic Channel Volume Slide Fader-Increase or decrease MIC volume.
18. Line In Channel Volume Slider-Increase or decrease LINE IN channel volume.

19. Headphone Channel Volume Slide Fader-Increase or decrease HEADPHONE output volume.
20. Line Out Channel Volume Slide Fader-Increase or decrease the LINE OUT channel volume.
21. Input Channel LED Indicator-To indicate MIC and LINE IN volume status.
22. Output Channel LED Indicator-To indicate HEADPHONE and LINE OUT volume status.

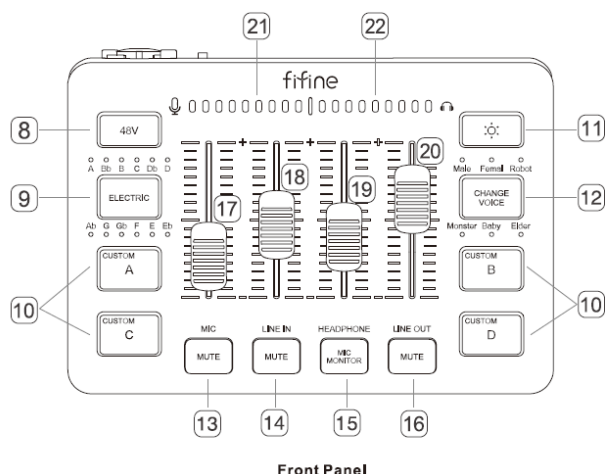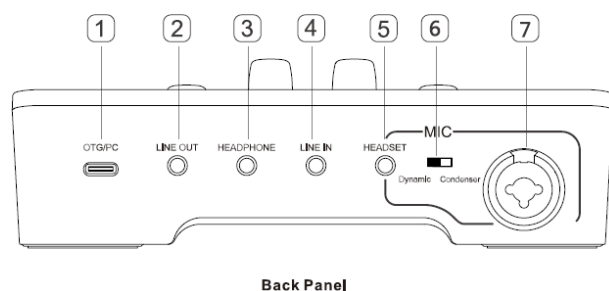

WARRANTY


- Every Fifine product comes with a Limited Warranty that, in normal use of the product, will be free of any defects in material or workmanship for a period of one year from its original date of purchase.
- For detailed warranty info, please refer to the warranty policy on our website or contact us directly.

CERTIFICATION

- Eligible to bear CE Marking.
- Authorized European Representative:
- Name: AOCE INFORMATION TECHNOLOGY
- Address: 61 rue de Lyon 75012 Paris, France
- Tel: +33-633297410
- Authorized British Representative:
- Name: AOCE LIMITED
- Address: Office Suite 29a 3/F 23 Wharf Street, London, England,


- SE8 3GG
- Tel: +44-
- 759 7659 775


Documents / Resources

	fifine SC3 Audio Mixer [pdf] User Guide SC3 Audio Mixer, SC3, Audio Mixer, Mixer
---	---

References

- [User Manual](#)

 Audio Mixer, fifine, Mixer, SC3, SC3 Audio

 fifine Mixer

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.