




Fingerprint Lock User Manual

[Home](#) » [Fingerprint Lock](#) » Fingerprint Lock User Manual

Contents [[hide](#)]

- 1 [Fingerprint Lock User Manual](#)
- 2 [FINGERPRINT LOCK](#)
- 3 I .USB Interface:
- 4 II .Indicator
- 5 III .Description Of First Administrator' s Fingerprint Record
- 6 IV. Number 2 to 10 Fingerprint Recording Instructions
- 7 Remarks:
- 8 V .Description Of Delete Fingerprint
- 9 VI.Specifications
- 10 Remarks:
- 11 VII.Low voltage
- 12 [Read More About This Manual & Download PDF:](#)
- 13 [Related Posts](#)

Fingerprint Lock User Manual

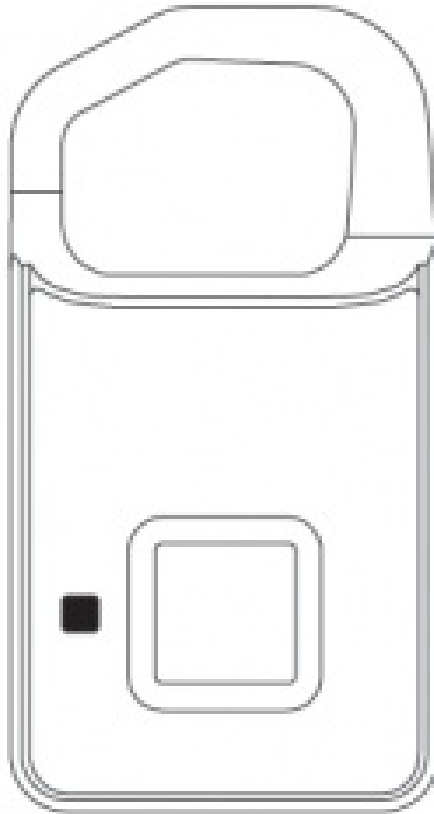

FINGERPRINT LOCK



Fingerprint



Stand-by
Time 6 Month



0.5s Unlock



Security

I .USB Interface:

The product is charged by USB. Please fully charge the product for the first time.

Components:

1. USBPort
2. LED Light
3. Fingerprint Reader
4. LockBeam

II .Indicator


Use 3-color indicator. Different indicator represents different devices and status.

Please check the details as below chart:


Indicator status	Function
Low power	Red light flash
Charging	Red light always on
Full charged	Lights off
Green light flash	Fingerprint collection mode
Green light always on	Successful to collect fingerprint
Blue light always on	Administrator fingerprint authorization
Green light flashes fast	Unlocked successfully
Red light aw;ays on	Delete fingerprint mode
Red light flash	Failed to collect fingerprint

III .Description Of First Administrator' s Fingerprint Record


1. Long press sensor 3 seconds
2. Left your finger when blue light flash

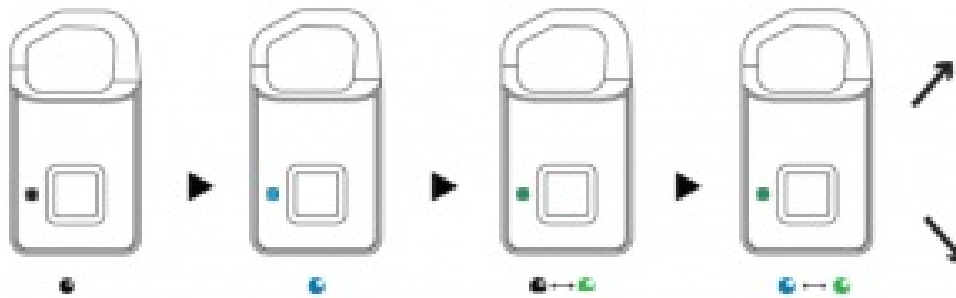


3. Start record the fingerprint when green light flash
4. Record 10 times with the same finger, and the blue light and green light flashes
5. /;; It reco unsuccessful when red light flash

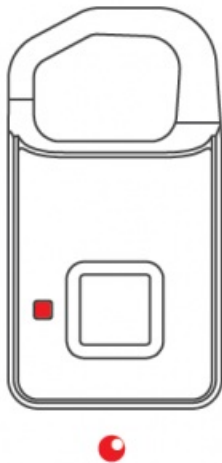


5. It records successful when blue light flash

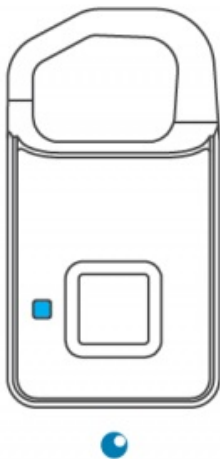


6. Total of 10 times of collection was successful, with a loud sound "Di", and green light Dynam Devil 3D DY8954 Instruction Manual flash continuously the admistors fingerprint was recorded successfully.

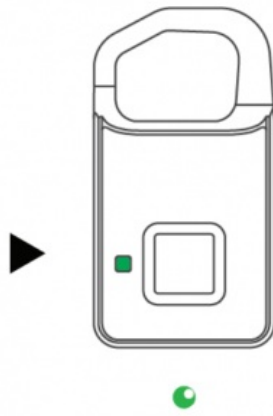

IV. Number 2 to 10 Fingerprint Recording Instructions

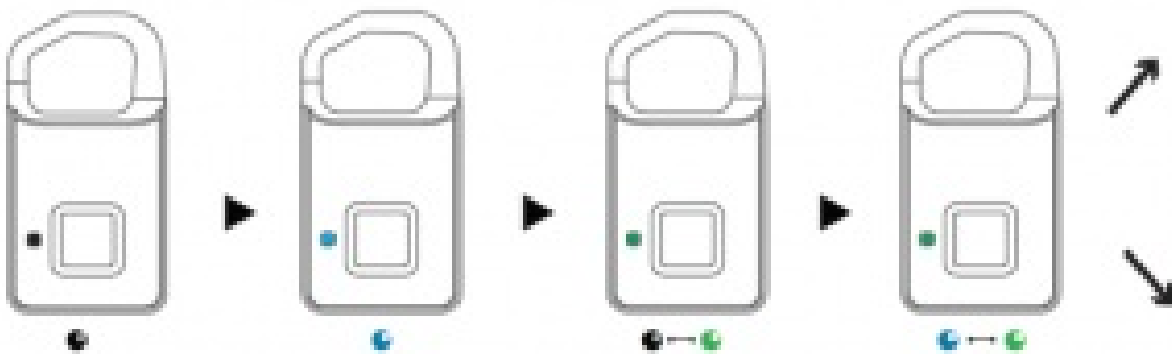


1. Long press sensor 3 seconds
2. Administrator authorize fingerprint when blue light flash continuously.
3. Start record the fingerprint when green light flash
4. Record 10 times with the same finger, and the blue light and green light flashes
5. It records successful when red light flash



5. It records successful when blue light flash




6. Total of 10 time: ofc.ollec. tion was successful, with a loud sound “di” ,and green light flash continuously, the fingerpnt was reoorded successfully.



Remarks:

1. The first and second fingerprints are the administrator fingerprint by default.
2. Collecting the second to tenth fingerprints requires administrator fingerprint authorization.

V .Description Of Delete Fingerprint

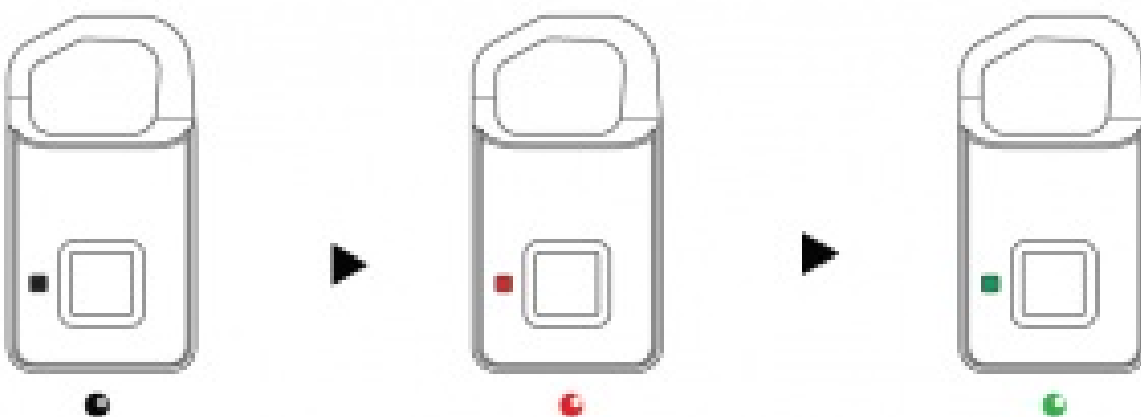

1. Long press sensor6-10 seconds
2. Administrator authorize fingerprint when red light flash continuously
3. The fingerprint was deleted successfully when green light flash continuously and sound continuously

VI.Specifications

Support 360 degree angel fingerprint recognize Resolution: 508DPI ESD: +/-12kVair, +/-BkV contact FRR:

<1% FAR: <0.002%

Recognize time: <300mS Battery: 3. 7V 80mAh Charger: 5V 200MA

Remarks:

Only the administrator can delete the fingerprint and delete all the fingerprints at once.

VII.Low voltage

When the voltage ~3.5V, the red indicator flash fast for 15s. If keep in the status of low batter, it will alarming per minute.

Read More About This Manual & Download PDF:

Fingerprint Lock User Manual – [Download \[optimized\]](#)

Fingerprint Lock User Manual – [Download](#)