



FLYDIGI Vader 3 Pro PC Gaming Controller User Manual

[Home](#) » [FLYDIGI](#) » FLYDIGI Vader 3 Pro PC Gaming Controller User Manual 



Vader 3/3 Pro
Game Controller
User Manual



<http://data.flydigi.com/api/web/link?u=1682492258>


Scan QR code to read the user manual

Contents

- 1 Innovative Force-switchable Trigger
- 2 Connect With Computer
- 3 Connect to Switch
- 4 Connect an Android/iOS device
- 5 Basic operations
- 6 Specification
- 7 Appearance
- 8 Q & A
- 9 Documents / Resources
 - 9.1 References
- 10 Related Posts

Innovative Force-switchable Trigger

Toggle the back gear switch to switch the trigger gear

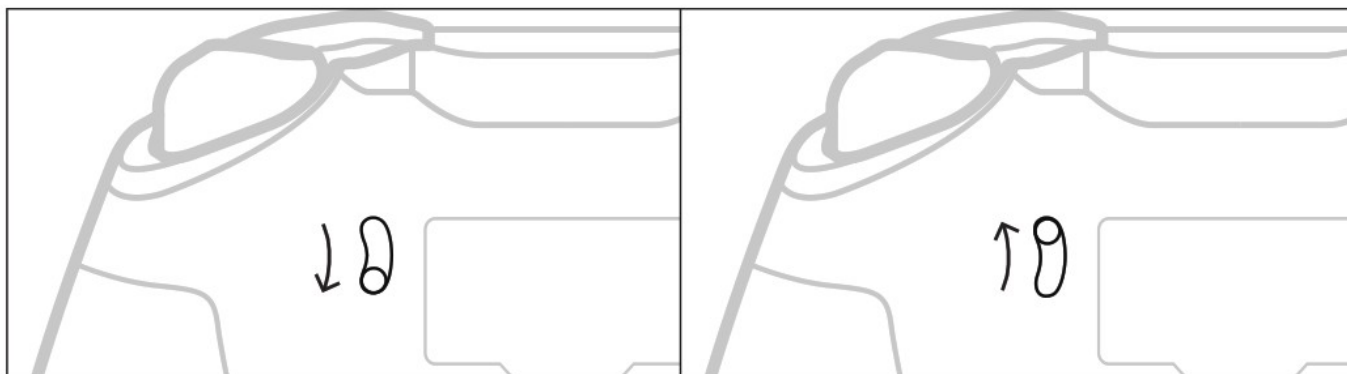

1. Linear gear: precise control, 9mm long key travel, Hall stepless magnetic induction, precision throttle
2. Microswitch gear: fast trigger, 0.3mm ultra-short key travel, mouse-level micro motion response, easy continuous shooting

Flydiggi Space Station For More Customize Setting

Visit Our official website www.flydiggi.com download “Flydiggi Space Station”, you can customize buttons, macros, body feeling, trigger and other functions.

The trigger vibrates

Switch trigger vibration, set vibration mode

Somatosensory mapping

The motion can be mapped to a joystick/mouse, making shooting games more accurate

Joystick adjustment

Set the center dead band and sensitivity curve

Light conditioning


Set up a variety of light effects, adjust color and brightness



*Trigger vibration function is only supported on Pro models


Connect With Computer



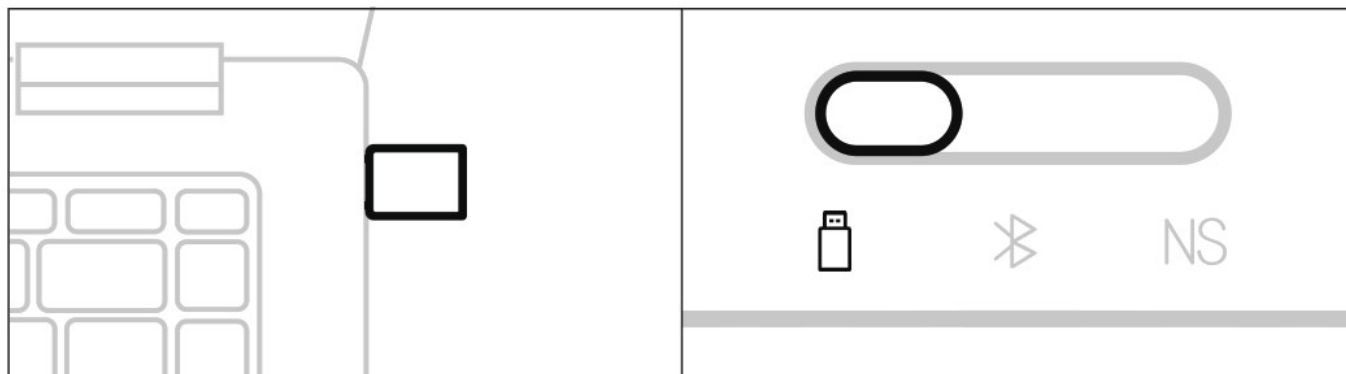

Wireless dongle connection

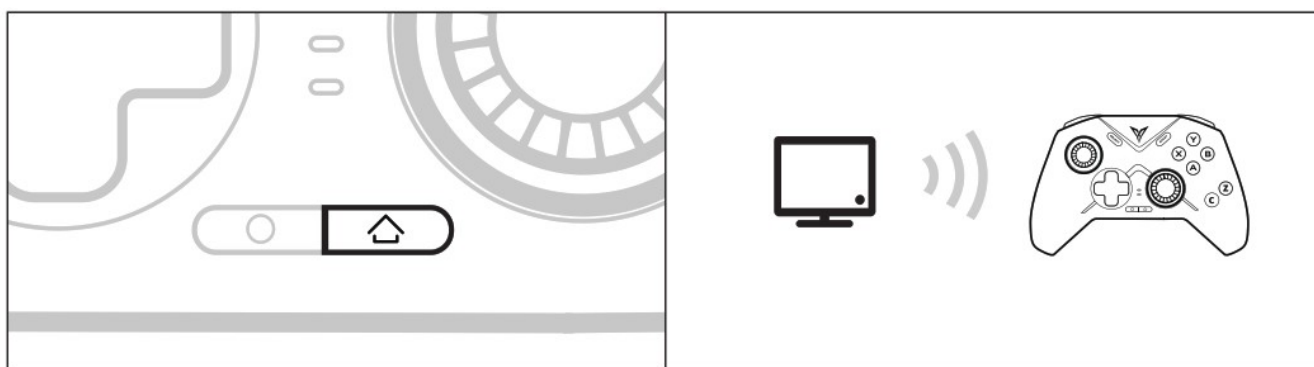

1. Plug the dongle into the computer's USB port
2. Dial the back gear to , press the  button, the controller will be connected automatically, and the first indicator light is solid white



3. If the indicator is blue, press and hold the  + X key at the same time until the indicator turns white
4. The next time you use it, press the  button once, and the controller will be connected automatically

Wired connection

Connect the computer and the controller through the USB cable, and the indicator light is solid white to indicate that the connection is successful

BT connection

Turn the back mode gear to  and connect the Xbox Wireless Controller to your computer's BT Setting



Connect to Switch

NC





1. Click the controller icon on the Switch homepage to enter [Change grip/order]
2. Shift the back gear to NC





3. Press the  button, the controller will be connected automatically, and the first indicator light is solid blue
4. The next time you use it, press the  button once and the controller will automatically connect


In Switch mode, the key and key-value mapping relationship is as follows


A	B	X	Y	SELECT	START		
B	A	Y	X	-	+	home page	Screenshot

Connect an Android/iOS device 



1. Shift the back mode gear to 
2. Press the  button once to wake up the controller

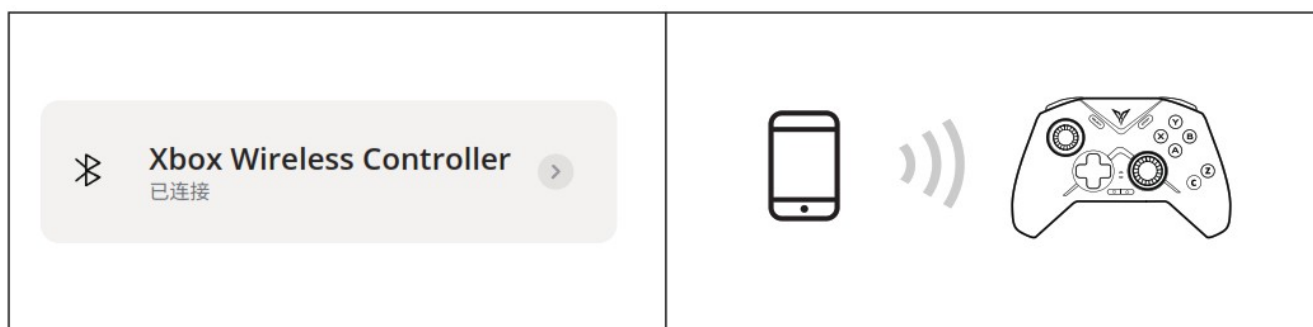

3. Turn on the device's Bluetooth, connect to the Xbox Wireless Controller, and the controller indicator
4. The next time you use it, press the  button once and the controller will automatically connect

Basic operations

Power on: Press the [Home] button once





Power off: switch back gear; After 5 minutes of no operation, the controller will automatically turn off

Low battery: The second LED flashes red

Charging: The second indicator is solid red

Fully charged: The second indicator is solid green

Specification

mode	Applicable Platforms	Light	Connection method	System requirements
	PC	Long press  +X to switch to XInput mode, the indicator is white	Dongle/ Wired	Win 7 and Above
	PC/Android /iOS	Long press  +A to switch to DirectInput mode, the indicator is blue	BT/Wired	Win 7 and Above Android 10 and Above iOS 14 and Above
NS	Switch	Blue	BT/Wired	Switch

XInput mode: suitable for the vast majority of games that natively support controllers

DirectInput mode: For emulator games that natively support controllers

DirectInput mode: For emulator games that natively support controllers

Wireless RF: Bluetooth 5.0


Service distance: less than 10 meters

Battery information: rechargeable lithium-ion battery, battery capacity 800mAh, charging time 2 hours, charging voltage 5V, charging current 800mA

Operating current: less than 45mA when in use, less than 45μA in standby

Temperature range: 5 °C ~ 45 °C use and storage

Appearance

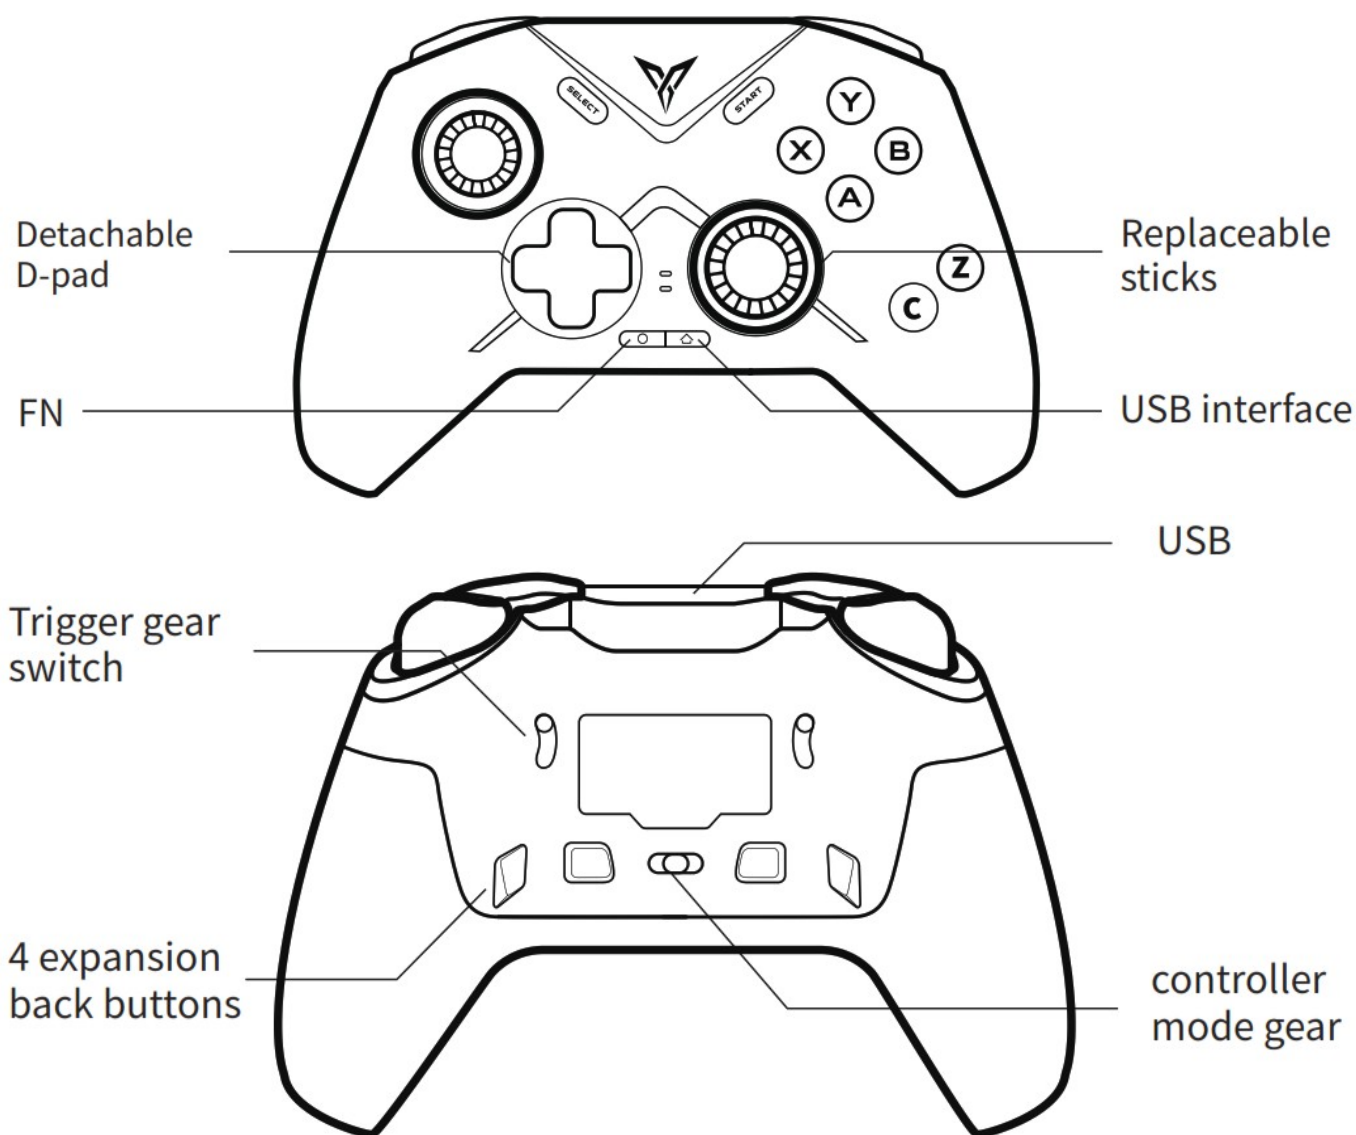

Q & A

The controller cannot be connected?

Please make sure that the back gear of the controller is correct, and press and hold the button for three seconds at the same time, the indicator flashes quickly, and the controller enters the pairing state - Pair the receiver: Unplug the receiver and plug it back into the USB port - Pair Bluetooth: Unpair the device on the Bluetooth settings page, turn Bluetooth on and off, and reconnect

How to upgrade the controller firmware?

Install the Feizhi space station on the computer, or install the Feizhi game hall on the mobile phone, and upgrade the firmware according to the software boot

Q: Is there an abnormality in the joystick/trigger/body feeling?

A: Install the Feizhi space station on the computer, enter the test page, and press the guide calibration controller

The name and content of harmful substances in the product


Part Name	Toxic or Hazardous Substances and Elements					
	Pb	Hg	Cd	Cr	PBB	PBDE
PCB Borad	○	○	○	○	○	○
Silent	○	○	○	○	○	○
Packaging	○	○	○	○	○	○
Wires	○	○	○	○	○	○
Polymer battery	○	○	○	○	○	○
Silicone	○	○	○	○	○	○
Small structural parts such as metal and tape	○	○	○	○	○	○

This form has been prepared in accordance with the provisions of SJ/T 11364

○ Indicates that the content of the hazardous substance in all homogeneous materials of this part is within the limit specified in GB/T 26572-2011 Require the following

✗ Indicates that the content of the hazardous substance in at least one homogeneous material of the component exceeds the provisions of GB/T 26572-2011 The limited requirements

Documents / Resources

	<p>FLYDIGI Vader 3 Pro PC Gaming Controller [pdf] User Manual</p> <p>Vader 3, Vader 3 Pro PC Gaming Controller, Pro PC Gaming Controller, PC Gaming Controller, Gaming Controller, Controller</p>
---	---

References

- [User Manual](#)