

 **FOXFURY**  
**COMMAND Series**  
**White LED**  
**Headlamp**



# FOXFURY COMMAND Series White LED Headlamp Instruction Manual

[Home](#) » [FoxFURY](#) » FOXFURY COMMAND Series White LED Headlamp Instruction Manual 

## Contents

- 1 FOXFURY COMMAND Series White LED Headlamp
- 2 Product Information
- 3 Product Usage Instructions
- 4 FAQ
- 5 INTRODUCTION
- 6 BATTERY
- 7 COMMAND RECHARGEABLE
- 8 OPERATIONAL MODES
- 9 INSTALLING THE ELASTIC STRAP
- 10 WARRANTY AND OTHER INFORMATION
- 11 CONTACT FOXFURY
- 12 Documents / Resources
  - 12.1 References



**FOXFURY COMMAND Series White LED Headlamp**



## Product Information

- The Command Series headlamps come in various models with different features and specifications.
- They are designed for hands-free illumination in various activities.

## Product Usage Instructions

- Open all six (6) of the Battery Pack Tabs.
- Insert four (4) AA batteries, ensuring correct polarity based on the plus (+) and minus (-) symbols.
- Test the light's performance by activating the Power/Mode Switch.
- Secure the Battery Pack Cover by snapping all six (6) Battery Pack Tabs until a 'click' is heard.
- Ensure the Battery Pack is properly closed for a watertight seal.
- Plug the AC-DC Adaptor into an outlet to turn the Charge Indicator solid green.
- Connect the Barrel Connector to the Battery Pack; the Charge Indicator on the AC-DC Adaptor will turn solid red to indicate charging.


## FAQ

- **Q:** What types of batteries are compatible with the Command Series headlamps?
- **A:** The Command Series headlamps require four (4) AA batteries. Acceptable types include Alkaline, rechargeable Alkaline, NiMH, or LiFeS2 batteries, each ranging from 1.2 to 1.6 volts. It is not recommended to mix new and used or different brand batteries to avoid leakage or explosion risks.
- **Q:** How often should I check the Battery Pack for corrosion?
- **A:** It is recommended to check the Battery Pack every month for battery corrosion. Avoid leaving batteries in the pack for more than three months without use to prevent damage. Corrosion from leaking batteries is not covered under warranty.


## INTRODUCTION

## COMMAND REFERENCE GUIDE


- COMMAND & COMMAND+ TILT LIGHT HEAD

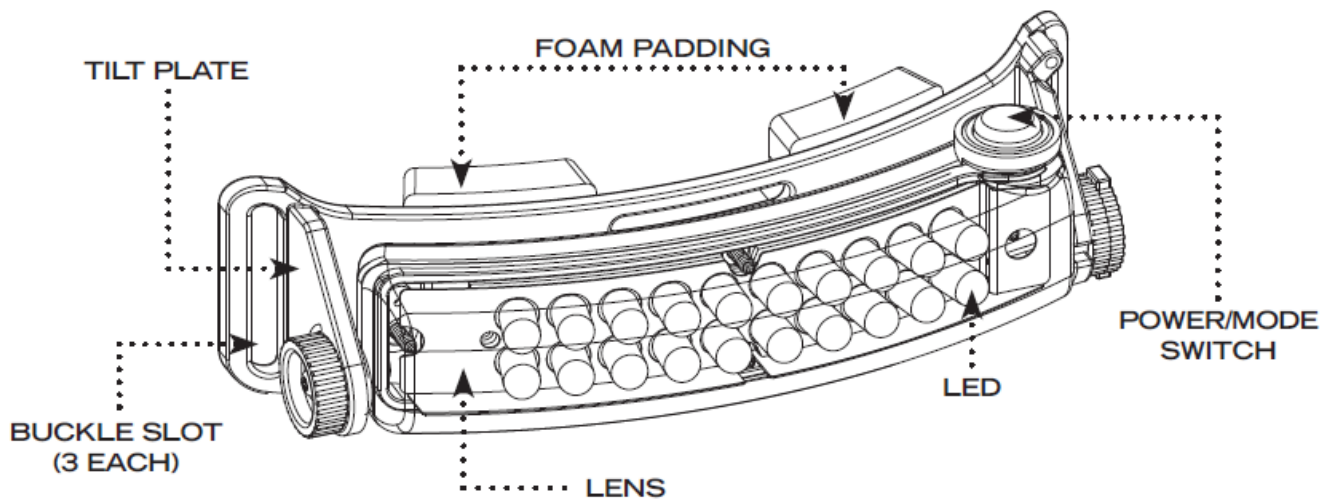

- COMMAND & COMMAND+ LO•PRO LIGHT HEAD

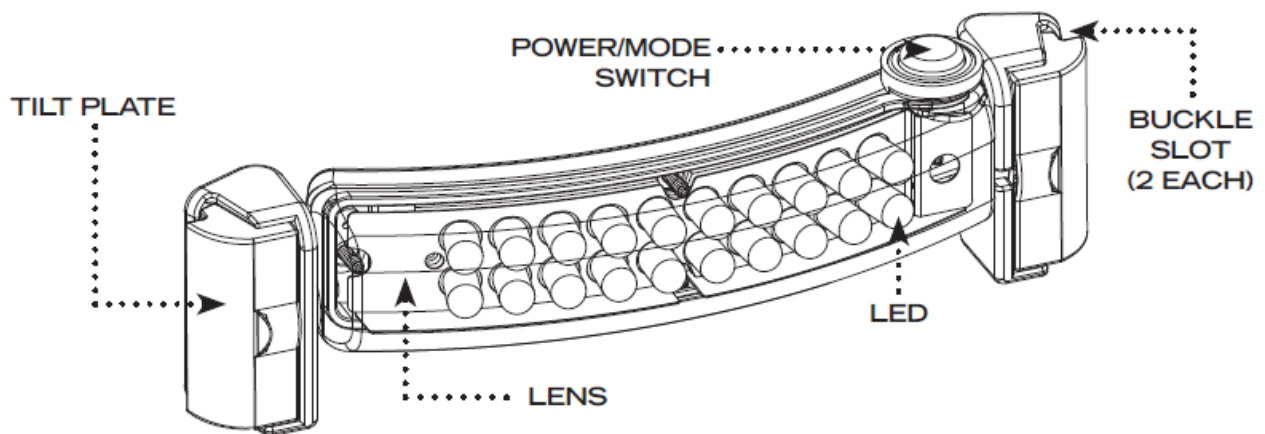

- COMMAND & COMMAND+ BATTERY PACK

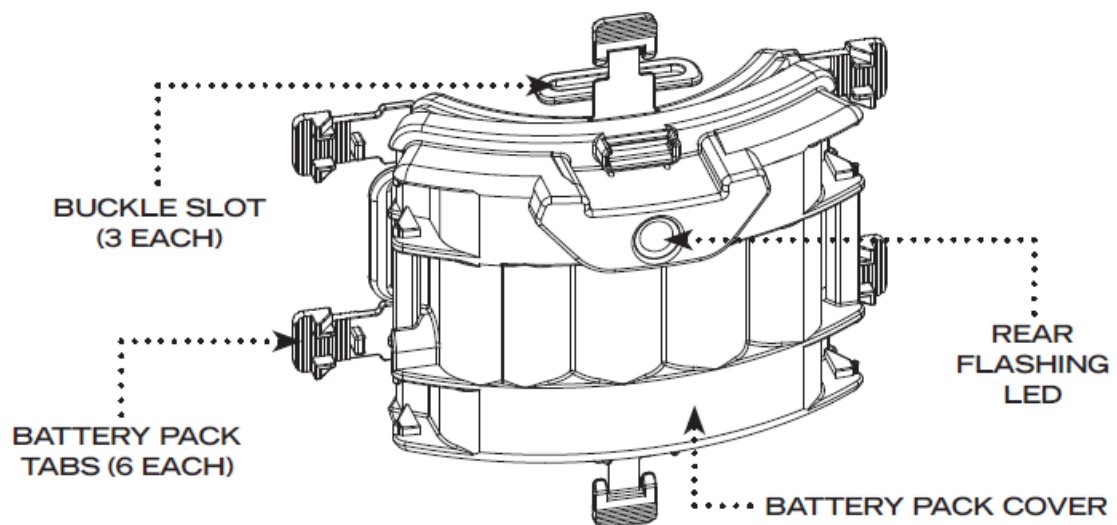

## PHYSICAL CHARACTERISTICS

- Please read below before using your Command headlamp as it relays beneficial operating and safety

information.

P/N	NAME	WEIGHT	DIMENSIONS (L x W x H)
410-L06	Command LoPro	6.4 oz (181 g)  Without Battery	5.3 x 0.7 x 1.0 in
	(White)		(135 x 18 x 25 mm)
410-T09	Command Tilt		4.8 x 1.0 x 1.0 in
	(White)		(122 x 25 x 25 mm)
420-L06	Command+ LoPro		5.3 x 0.7 x 1.0 in
	(White & Green)		(135 x 18 x 25 mm)
420-T06	Command+ Tilt	9.6 oz (272 g)  With Battery	4.8 x 1.0 x 1.0 in  (122 x 25 x 25 mm)
	(White & Green)		
420-T09	Command+ Tilt		
	(White)		
420-T15	Command+ Tilt		
	(White & Amber)		

## COMMAND RECHARGEABLE

P/N	NAME	WEIGHT	DIMENSIONS (L x W x H)
420-L06R	Command+ LoPro (White & Green) Rechargeable	8.8 oz (249 g)	5.3 x 0.7 x 1.0 in (135 x 18 x 25 mm)
420-T09R	Command+ Tilt (White) Rechargeable		4.8 x 1.0 x 1.0 (120 x 25 x 25 mm)

## WARNINGS

- Do not stare into LEDs for long periods of time or from a close range of less than 2 ft (0.6 m).


## BATTERY

- The Command Series requires four (4) AA batteries. Acceptable battery types include: Alkaline or rechargeable Alkaline, rechargeable NiMH or LiFeS2 (all are 1.2 to 1.6 volts each).
- Do not leave batteries in the Battery Pack for periods longer than three (3) months without use.
- Be sure to check the Battery Pack every month for battery corrosion.

**NOTE:** Corrosion from leaking batteries is NOT covered by the warranty.

**NOTE:** Mixing of new and used, or different brand batteries is not recommended as this could lead to leakage or explosion.

**BATTERY INSTALLATION** (WATCH THE VIDEO: [FOXFURY.COM/VIDEOS](https://www.foxfury.com/videos))

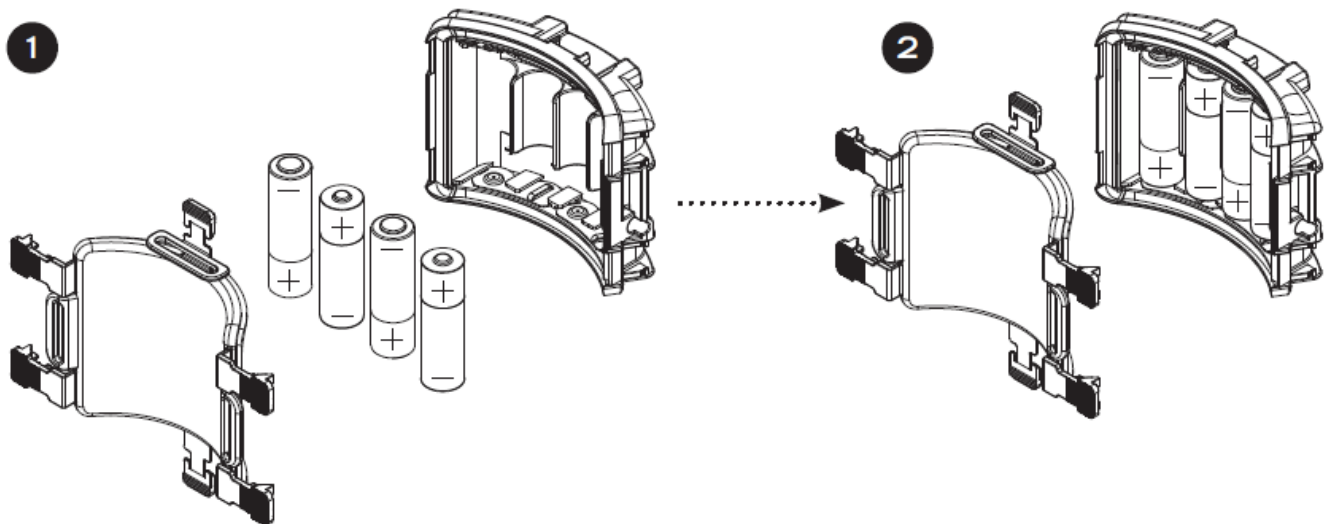

1. Open all six (6) of the Battery Pack Tabs.
2. Insert four (4) AA batteries. Reference the plus (+) and minus (-) symbols located on the inside of the Battery Pack for proper installation.


**REASSEMBLING THE BATTERY PACK**

1. Once batteries are installed, test the light's performance by activating the Power/Mode Switch located on the top of the light.
2. Secure the Battery Pack Cover by snapping all six (6) Battery Pack Tabs. A 'click' should be heard as the snaps are shut.

**NOTE:** Make sure the Battery Pack is properly closed to maintain a water-tight seal.

**COMMAND RECHARGEABLE**

**CHARGING THE BATTERY PACK** (FOR P/N 420-L06R, -T09R ONLY)

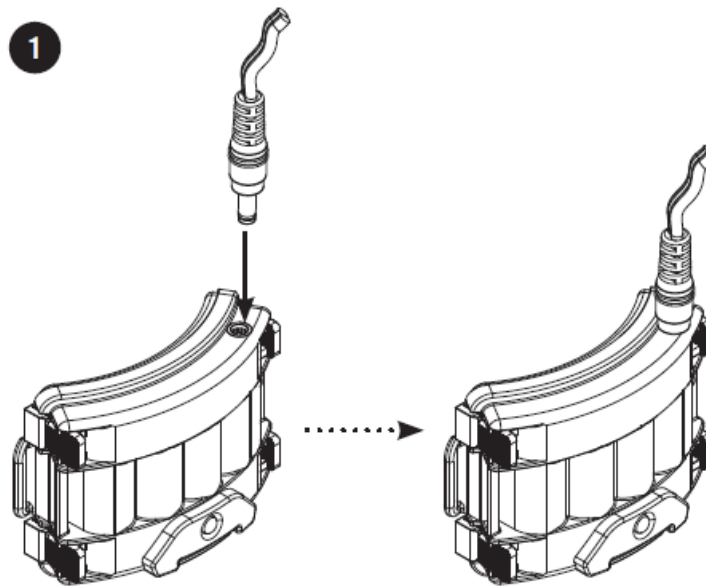

Begin by plugging the AC-DC Adaptor into an outlet. The Charge Indicator will then turn solid green.

1. Plug the Barrel Connector into the Battery Pack. Once plugged in, the Charge Indicator on the AC-DC Adaptor, will turn solid red to indicate that it is charging.
- Once fully charged, the Charge Indicator (located on the AC-DC Adaptor) will change back to solid green.
  - Charging time will be approximately 3.5 hours.
  - Continuously charging (leaving the Command plugged in) could damage the Battery Pack and lead to decreased battery life. Do not charge the headlamp for more than 7.5 hours at a time.
  - If your FoxFury rechargeable headlamp has been unused for 10 to 15 days, then charge for 1.5–2 hours before extended use.

## OPERATIONAL MODES

COMMAND TILT & COMMAND LO•PRO:

- **ON/LOW mode:** Press the Power/Mode switch once. The center 2 LEDs will turn on.
- **MEDIUM mode:** From LOW mode, press the Power/Mode Switch once. The center 6 LEDs will turn on.
- **HIGH mode:** From MEDIUM mode, press the Power/Mode Switch once. All 10 LEDs will turn on.

COMMAND+ TILT, COMMAND+ LO•PRO, RECHARGEABLE:

- **ON/LOW mode:** Press the Power/Mode Switch once. The center 4 LEDs will turn on.
- **MEDIUM mode:** From LOW mode, press the Power/Mode Switch once. The center 12 LEDs will turn on.
- **HIGH mode:** From MEDIUM mode, press the Power/Mode Switch once. All 20 LEDs will turn on.

**NOTE:** All P/Ns listed above will power OFF after HIGH mode. When ON (for all modes), the rear LED (located on the Battery Pack) will flash.

## COMMAND+ LO•PRO RECHARGEABLE

MODE	BATTERY LIFE	LUMENS
LOW POWER	10 hours	32
MEDIUM POWER	5 hours	78
HIGH POWER	3 hours	100

#### COMMAND TILT & COMMAND LO-PRO

MODE	BATTERY LIFE	LUMENS
LOW POWER	28 hours	16
MEDIUM POWER	10 hours	45
HIGH POWER	7 hours	65


#### COMMAND+ TILT & COMMAND+ LO-PRO

MODE	BATTERY LIFE	LUMENS
LOW POWER	14 hours	32
MEDIUM POWER	6 hours	78
HIGH POWER	5 hours	100

- Battery life may vary according to the mode selected, battery quality & type, and prevailing ambient conditions.

#### INSTALLING THE ELASTIC STRAP

- 5 MINS (APPROX) (WATCH THE VIDEO: [FOXFURY.COM/VIDEOS](https://www.foxfury.com/videos))

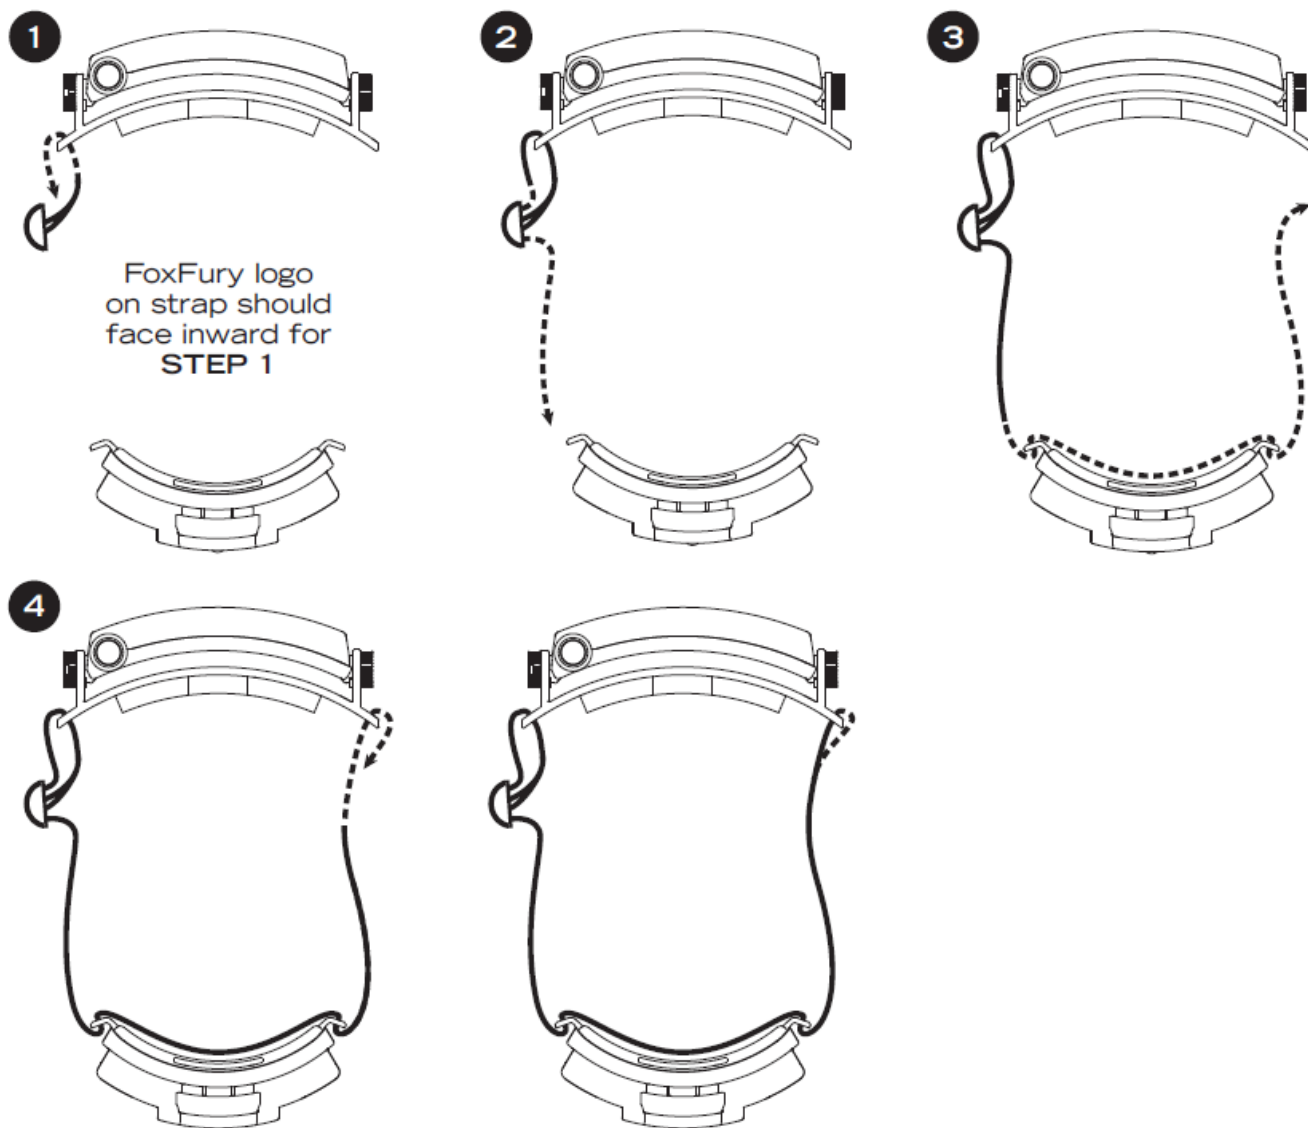


Place the headlamp on a flat surface. Position the Light Head so the Power/Mode Switch is on the left and the LEDs face forward. NOTE: Make sure the FoxFury logo on the Battery Pack is correctly oriented before beginning.

1. Begin with the end of the strap that does not have the Buckle attached. With the FoxFury logo side of the strap facing right, feed the strap through the left Buckle Slot of the Light Head.
2. Run the free side of the strap back through the Buckle. NOTE: The FoxFury logo on the strap will now be facing to the left.
3. Run the remaining bit of strap through the left Buckle Slot on the Battery Pack (on the cable side). Then continue through the Buckle Slot on the right side of the Battery Pack.
4. Continue to run the strap through the Buckle Slot on the right side of the lighthouse. Firmly press the velcro together to finish installing the Strap. Adjust the Battery Pack position and strap length at the Buckle for the desired fit.

**INSTALLING THE SILICONE STRAP | 5 MINS (APPROX) (WATCH THE VIDEO: [FOXFURY.COM/VIDEOS](https://www.foxfury.com/videos))**



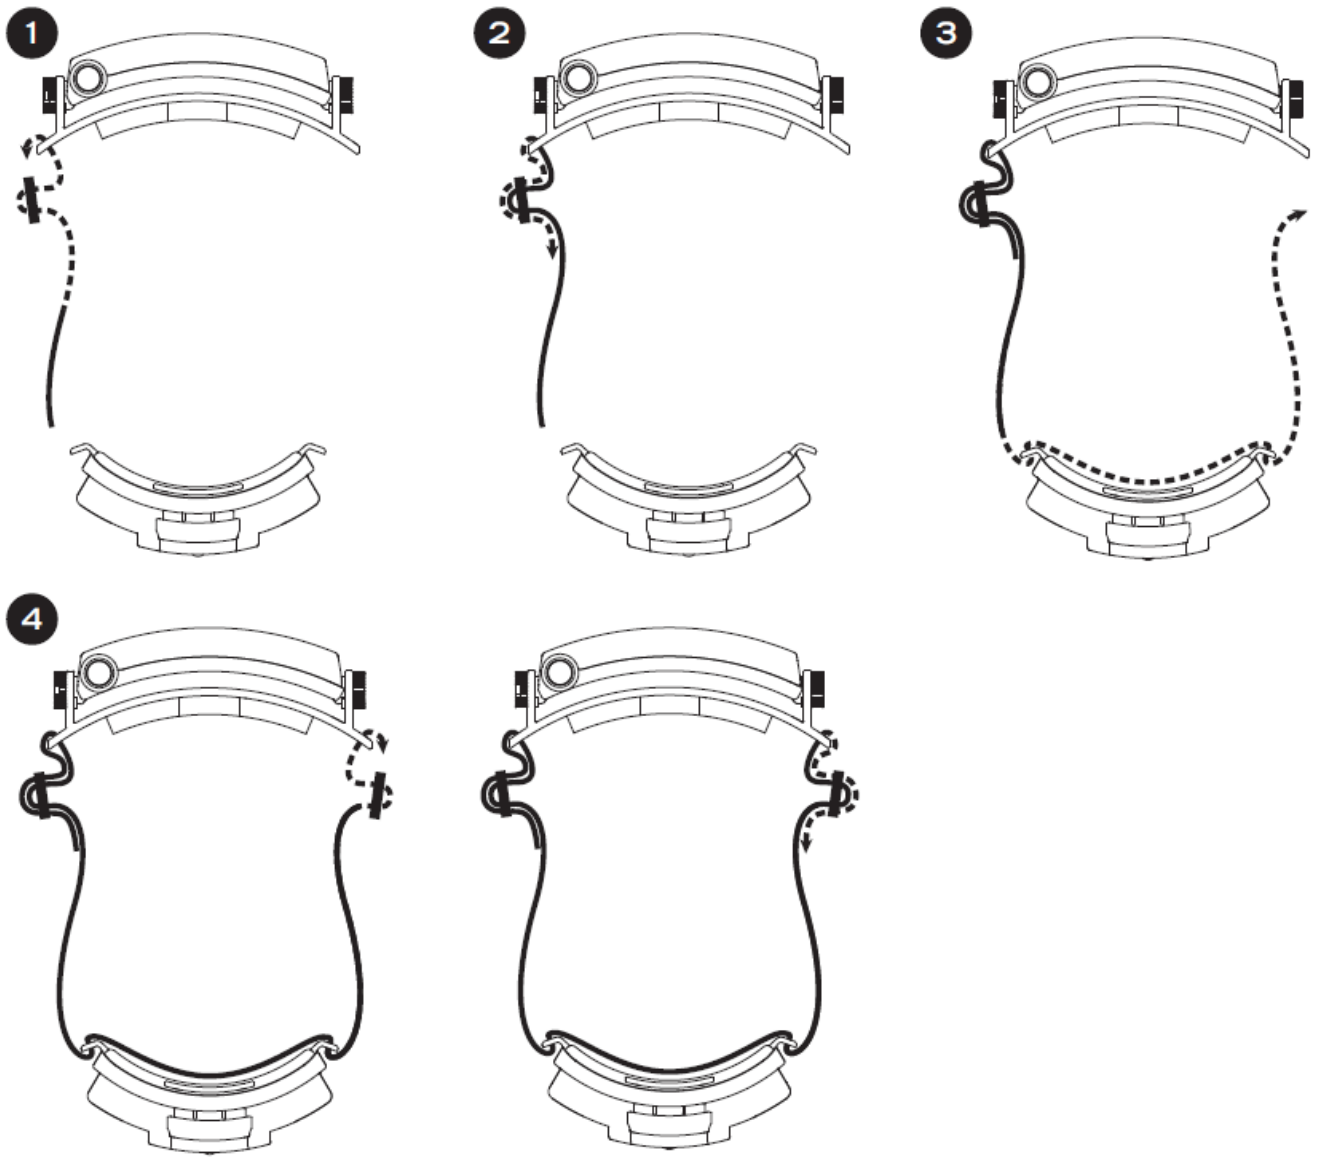

Place the headlamp on a flat surface. Position the Light Head so the Power/Mode Switch is on the left and the LEDs face forward. NOTE: Make sure the FoxFury logo on the Battery Pack is correctly oriented before beginning.

1. The Silicone Strap comes with two (2) buckles. Attach the first buckle onto one end of the strap (about six (6) inches from the end). Then, take that end of the strap and run it through (from the inside) the Buckle Slot on the left of the Light Head.
2. Once the strap is through the left Buckle Slot of the Light Head, feed the strap back through the Buckle.
3. Run the opposite end of the strap through the left Buckle Slot on the Battery Pack (on the cable side). Then continue through the Buckle Slot on the right side of the Battery Pack.
4. Repeat Steps 1-2 for the right side of the strap. Adjust the Battery Pack position and strap length at the Buckle for the desired fit.

## WARRANTY AND OTHER INFORMATION

### PRODUCT DURABILITY



- Meets NFPA Requirements.

### CARE/CLEANING

Your FoxFury product is a professional tool, but regular maintenance and care of your light will maximize performance for you. As needed, wash your FoxFury product using a soft washcloth, clean water and a mild soap. Be sure that both the Light Bar and Battery Pack are reassembled securely before washing. When done, pat dry with a damp cloth.

### AVAILABLE ACCESSORIES

- Elastic Strap, P/N 60-019
- Silicone Glow Strap, P/N 600-026
- Silicone Black Strap, P/N 600-027
- Chin & Overhead Strap Set, P/N 600-1002

### WARNINGS

FoxFury, LLC is not responsible for the incorrect use of any FoxFury Lighting product.

- Lights are strong enough to cause damage to the human eye.
- Do not stare into LEDs for long periods or from a close range (less than 2 ft).
- FoxFury, LLC is not responsible for any injury or damage caused during the use of this product.
- Usage of this product must be supervised by an adult when it is being used by a minor.
- Any FoxFury product should be operated at speeds safe enough to maneuver around surrounding obstacles.
- Do not use under the influence of drugs or alcohol.

### LIMITED LIFETIME WARRANTY

FoxFury, LLC ("FoxFury") warrants this product to be free from defects in material for a lifetime of use except for batteries, LEDs, abuse, and normal wear. We will repair or replace this product should we determine it to be defective. This limited lifetime warranty excludes rechargeable batteries, chargers, switches, and electronics, which have a 2-year warranty with proof of purchase.

This limited lifetime warranty is given only to the original end user of the accompanying product. If you purchased a product from someone other than an authorized FoxFury reseller/distributor or if the product was used, (including but not limited to demo models, show models, or refurbished products by someone other than FoxFury) before your purchase, you are not the Original Purchaser and the product that you purchased is not covered by this warranty. This limited warranty is VOID if this Product has been altered or modified in any way (including but not limited to attempted warranty repair without authorization from Foxfury and/or alteration/removal of the serial number). To expedite warranty concerns, we encourage the end user to register their FoxFury Product at [www.foxfury.com/pages/warranty-registration](http://www.foxfury.com/pages/warranty-registration).

THIS IS THE ONLY WARRANTY, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. INCIDENTAL, CONSEQUENTIAL OR

SPECIAL DAMAGES ARE EXPRESSLY DISCLAIMED EXCEPT WHERE SUCH LIMITATION IS PROHIBITED BY LAW.

You may have other specific legal rights which vary by jurisdiction. Go to [www.foxfury.com/pages/warranty](http://www.foxfury.com/pages/warranty) for a complete copy of the warranty. Retain your receipt for proof of purchase.

All FoxFury products are designed in Oceanside, CA. All FoxFury products are manufactured with the highest quality in the USA and foreign parts. Products are assembled in either FoxFury's controlled plant in Asia or the USA, under strict quality control.

### CALIFORNIA PROPOSITION 65


This product can expose you to chemicals including Lead and DEHP, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to

[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### CONTACT FOXFURY

- FoxFury, LLC
- Oceanside, CA 92056 USA
- Tel: 760.945.4231
- Email: [service@FoxFury.com](mailto:service@FoxFury.com)
- Web: [FoxFury.com](http://FoxFury.com)

### Documents / Resources

	<p><a href="#">FOXFURY COMMAND Series White LED Headlamp</a> [pdf] Instruction Manual</p> <p>410-L06, 410-T09, 420-L06, 420-T06, 420-T09, 420-T15, 420-L06R, 420-T09R, COMMAND Series White LED Headlamp, COMMAND Series, White LED Headlamp, LED Headlamp, Headlamp</p>
---	--

### References

- [Home | FoxFury](#)
- [P65Warnings.ca.gov](http://P65Warnings.ca.gov)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.