




FX Luminaire SRP RGBW Strip Light Instruction Manual

[Home](#) » [FX Luminaire](#) » FX Luminaire SRP RGBW Strip Light Instruction Manual 

FXLuminaire®




STANDARD

SPECIALTY LIGHT | SRP
Instruction Manual

Contents


- [1 INCLUDED COMPONENTS](#)
- [2 CIRCUITING GUIDELINES](#)
- [3 INSTALLATION](#)
- [4 TRANSFORMERS](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

INCLUDED COMPONENTS

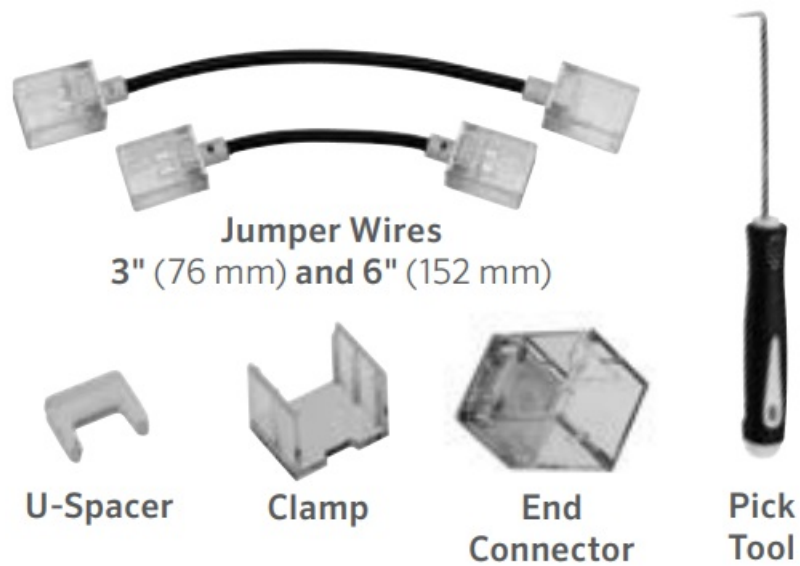

COMPONENTES INCLUIDOS

TOOLS & MATERIALS REQUIRED (SOLD SEPARATELY)

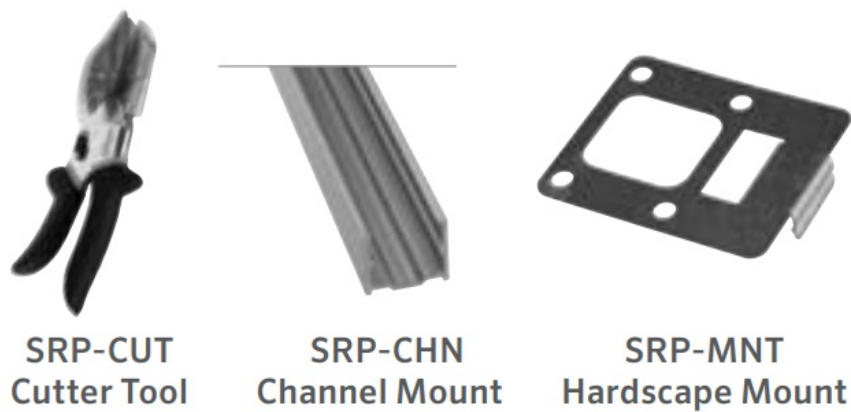

HERRAMIENTAS Y MATERIALES


CIRCUITING GUIDELINES

	<div data-bbox="686 1518 1019 1901"> <p>SCAN for help</p>  </div>	
<p>fxl.help/circuiting</p>		

INSTALLATION

1. Measure and cut the length required for installation.


2. Insert the

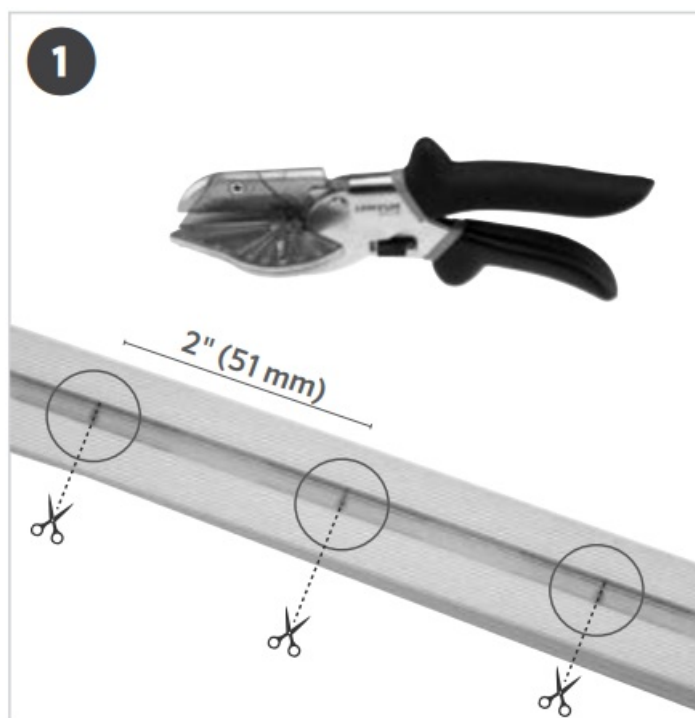

2

3. Insert a Jumper Wire into the strip light. Ensure jumper pins are installed on top of the copper pads. Use the Pick Tool to expose the pads prior to installing the jumper.


4. Install the
Press down firmly. Get

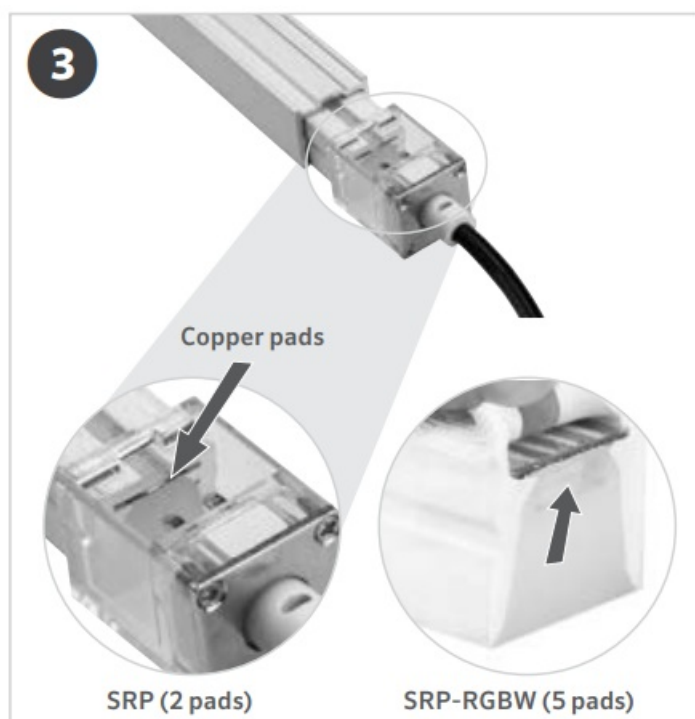

4

5. Insert the End Connector on the opposite end. Install the Clamp. Press down firmly. Pull the connection area to confirm it is secure.

6. Starting
P-CHN
Channel M
is step an

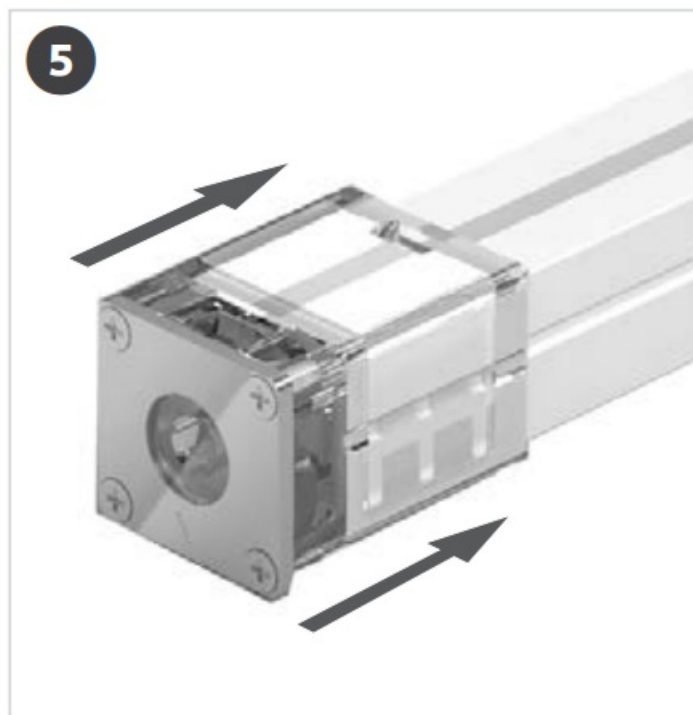

6



7



7. Press the strip light into the installed SRP-MNT Hardscape Mount. The ideal placement is one mount every 20" (508 mm) or less.

TRANSFORMERS

Single transformer: When using one transformer, center the transformer on the wattage load. Minimize all cable runs to reduce voltage drop.

Multiple transformers: When using multiple transformers, spread the load evenly across all transformers. Avoid voltage drop by installing the transformers as close to the fixtures as possible.

WARNING – To reduce the risk of FIRE OR INJURY TO PERSON:

- Turn off/unplug and allow to cool before replacing lamp.
- Lamp gets HOT quickly. Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or enclosure.

- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth.
Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.


WARNING – Risk of Electric Shock

- May be installed less than 5' (1.5 m) from a pool, spa, or fountain when used with a UL 379 listed transformer.
- A luminaire shall not use tungsten halogen lamps unless the luminaire is marked for such lamps.
- Supply connection and electrical components are located above ground level, except for secondary cord that is suitable for wet locations.

LOW VOLTAGE CABLE SHALL:

- Be protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck.
- Not be buried except for a maximum 6" (152 mm) in order to connect to the main low voltage cable.
- Have the length cut off so that it is connected to a connector within 6" (152 mm) from a building structure, a luminaire, or fitting.

This product contains a light source of energy efficiency class G.



LANDSCAPE & ARCHITECTURAL LIGHTING

Learn more. Visit fxl.com

Documents / Resources



[FX Luminaire SRP RGBW Strip Light](#) [pdf] Instruction Manual
SRP RGBW Strip Light, SRP, RGBW Strip Light, Strip Light, Light