



geemarc Amplicall Sentinel 1 Video Baby Monitor System User Manual

[Home](#) » [geemarc](#) » geemarc Amplicall Sentinel 1 Video Baby Monitor System User Manual 



Video baby monitor with Shaker,
Flash and Loud Alarms
User Manual



Contents

- 1 Amplicall Sentinel 1 Video Baby Monitor System
- 2 Package Contents
- 3 Safety Instructions
- 4 Setting up your Video Baby Monitor
- 5 Monitoring Screen Icons
- 6 Menu function (Baby monitor)
- 7 Technical Features
- 8 GUARANTEE
- 9 DECLARATIONS
- 10 Documents / Resources
 - 10.1 References
- 11 Related Posts

Amplicall Sentinel 1 Video Baby Monitor System

Please refer to our website: www.geemarc.com for an up to date user guide, as there may be important updates and changes you need to be aware of.

Note: This User's Guide provides you with all the information you need to get the most from your product.




Before you can use the baby monitor, we recommend you insert and fully charge the battery in the Baby monitor, so that it continues to work if you disconnect it from the mains power to carry it to another location. Please read the Safety Instructions on page 2 before you install the units.

Package Contents

The AC Sen1 (AMPLICALL™ Sentinel 1) box contains the following items:

- 1 Baby monitor
- 1 Baby unit (camera)
- 2 AC/DC power adaptors
- 1 Foldable stand
- 2 magic tapes
- 1 shaker
- 1 user manual

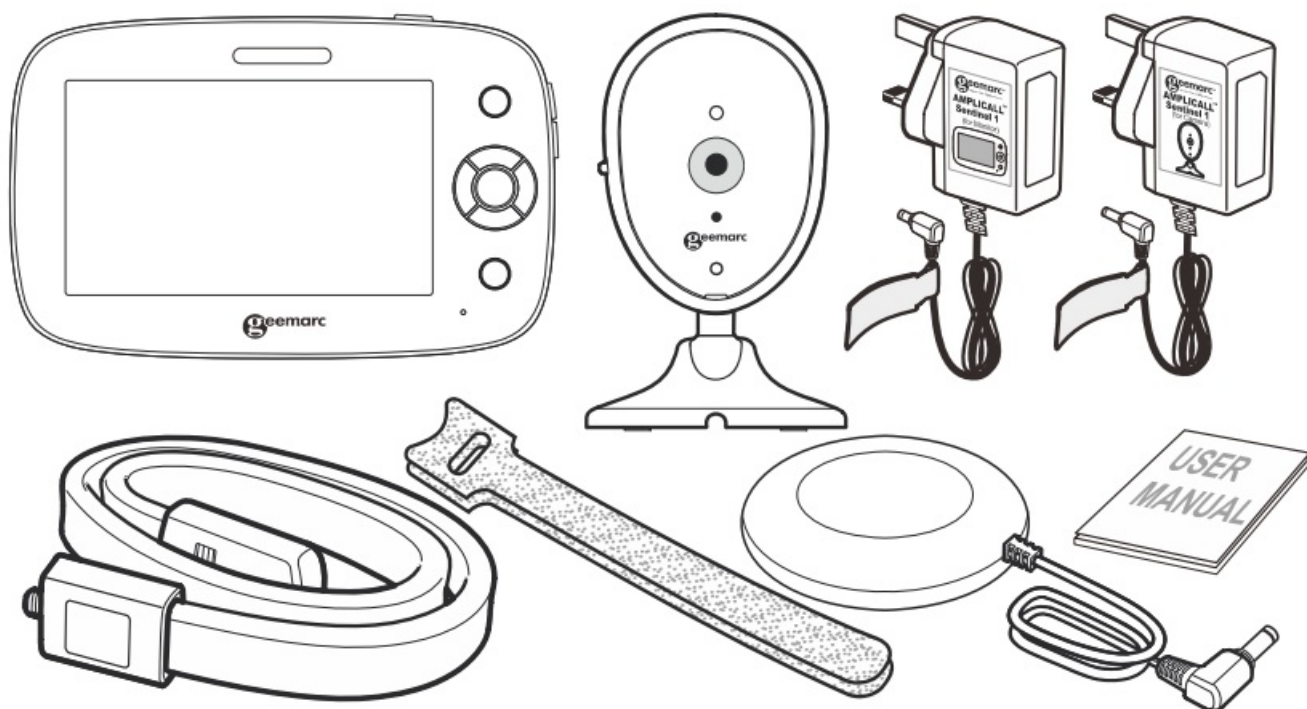

Safety Instructions




WARNING:

This baby monitor is compliant with all relevant standards regarding electromagnetic fields and is, when handled as described in the User's Guide, safe to use.


Therefore, always read the instructions in this User's Guide carefully before using the device.

- Adult assembly is required. Keep small parts away from children when assembling.
- This product is not a toy. Do not allow children to play with it.
- This baby monitor is not a substitute for responsible adult supervision.
- Do not place the camera or cables in the cot or within arm's reach of the baby (at least 1 meter away).
- Keep the cords out of reach of children.
- Do not use the baby monitor near water or a heat source.
- Only use the power adapters provided.
- Do not touch the plug contacts with sharp or metal objects.

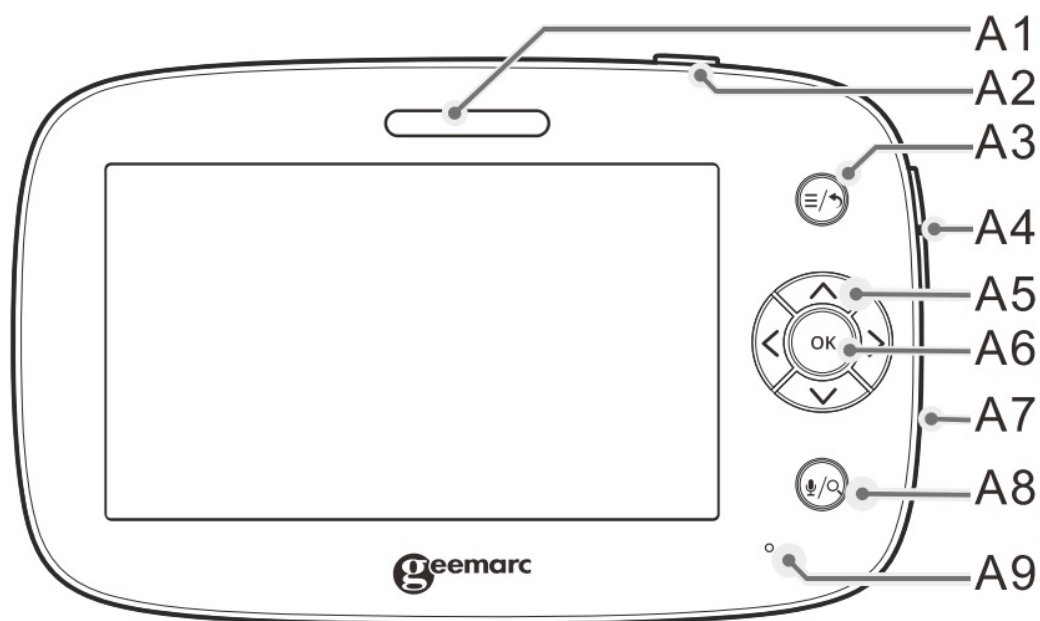



- A1. Flash / Indicators
- A2. Power Button
- A3. Menu / Back Button
- A4. Volume +/-
- A5. Navigation key
- A6. OK Button
- A7. Speaker
- A8. Talk / Zoom Button
- A9. Mic

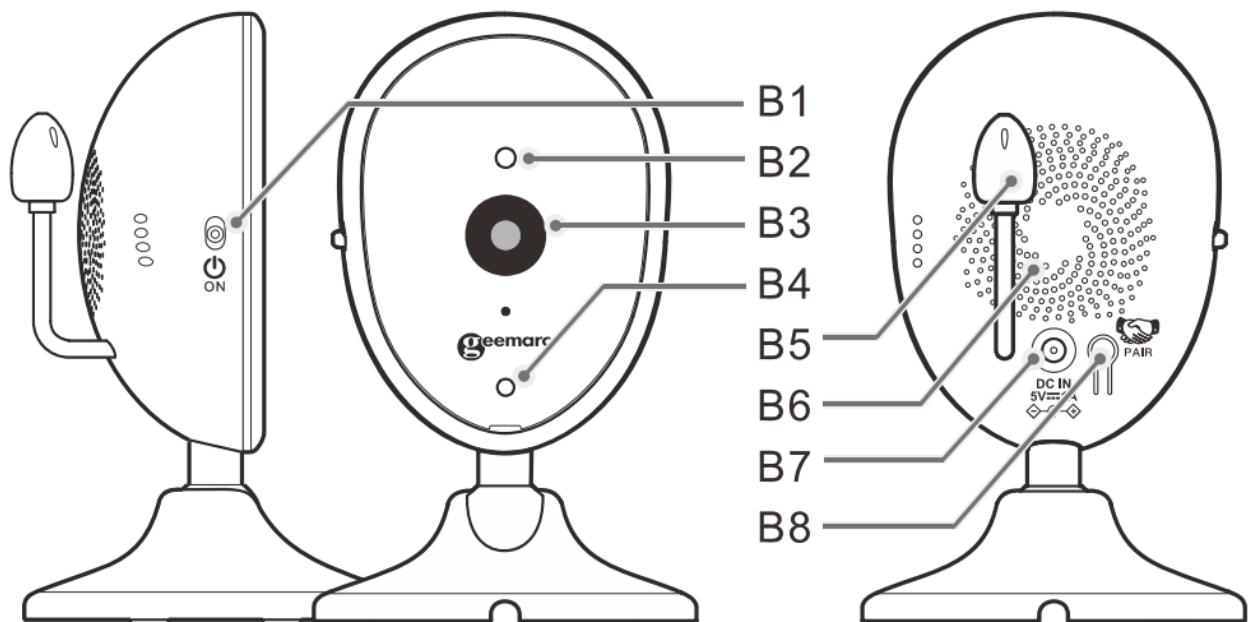Baby Monitor — Basic operation of the keys		
	Power button	Turn ON/OFF – Press and Hold 3 seconds Screen Sleep/Wake – Press One time
	Menu button	Press to access different menu options
	Back button	Press to back to previous directory
	Navigation key	Press to move up, down, left, right to select optional item on the screen
	OK button	Press to confirm or accept the selection
	Talk button	Press and hold to talk
	Zoom button	Press to digital zoom
	+/- button	Press to adjust volume level



B1. Power Button	B5. Temperature Probe
B2. Light Sensor	B6. Speaker
B3. Lens	B7. DC input
B4. Indicator	B8. Pair button

Camera – Basic operation of the keys	
 Power button : Slide to turn ON/OFF	 PAIR button : Press to pair the Baby monitor

Note:


The enclosed camera has already been paired, You do not need to register it again unless the camera loses its link with the Baby monitor. See section “5.1 Camera” for more details.

Setting up your Video Baby Monitor

3.1 Camera power supply

– Connecting the power adapter for the camera.

- Connect the small plug of the adapter to the Camera and the other end to the power socket.
- Only use the enclosed adapter (5V DC/1 A).

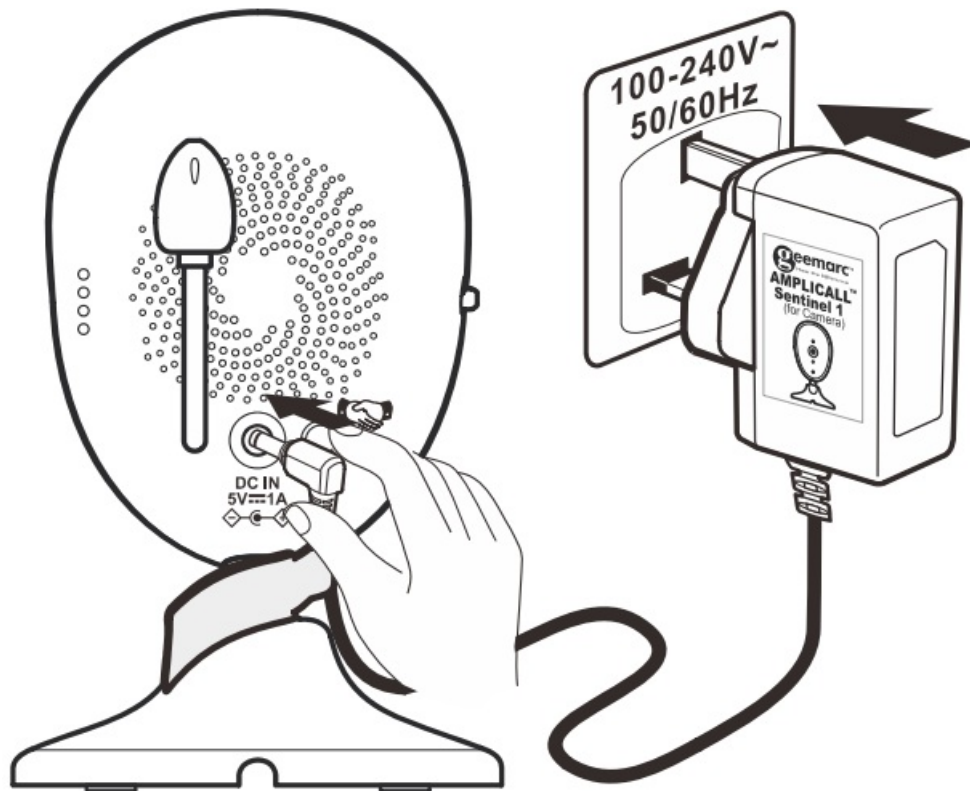


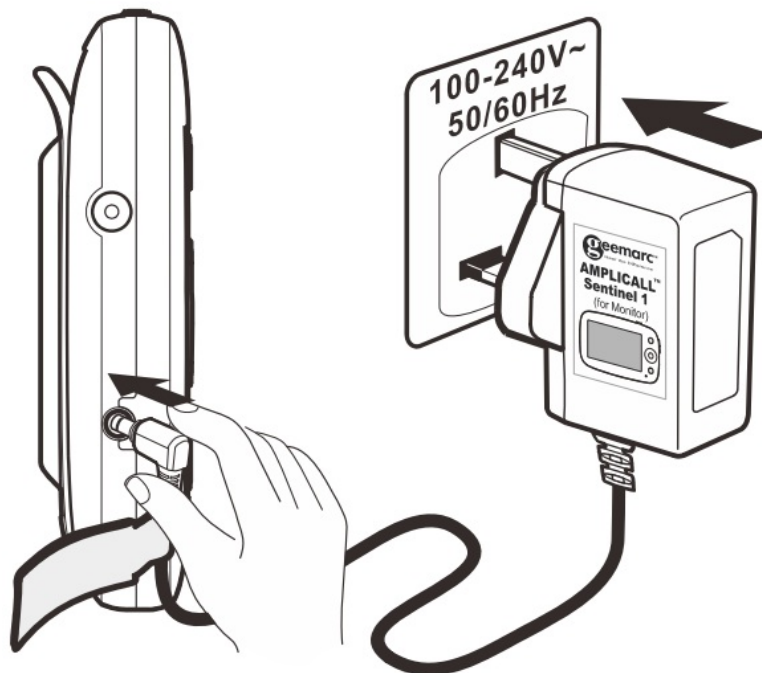
WARNING:

Do not place the camera or cables in the cot or within arm's reach of the baby (at least 1 meter away).


3.2 Baby monitor power supply

– Connecting the power adapter for the Baby monitor if it is in low battery status.

- Connect the small plug of the adapter to the Baby monitor and the other end to the power socket.
- Only use the enclosed adapter (5V DC / 1,5A).
- Press and hold the POWER button  on the Baby monitor to turn it ON.



Monitoring Screen Icons




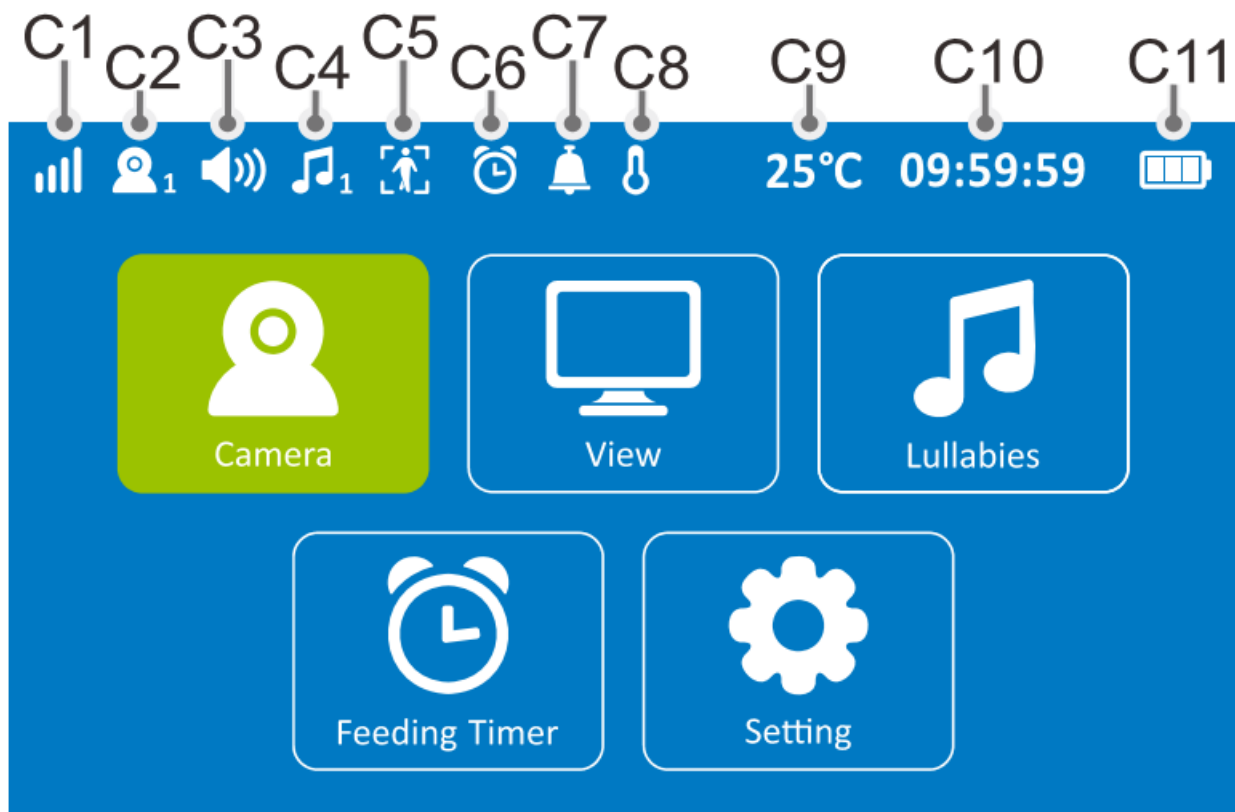


C1. Signal strength indicator	C7. VOX mode
C2. Camera number	C8. Temperature Alarm
C3. Vocal / Mute mode	C9. Baby room's temperature
C4. Lullabies	C10. Time
C5. Motion Detecting	C11. Battery indicator
C6. Feeding Timer	

Menu function (Baby monitor)


5.1 Camera

- User can add 4 camera at most.
- Select “Camera“ Select “Add Camera” Press “OK” Press the Pairing Button on Camera.

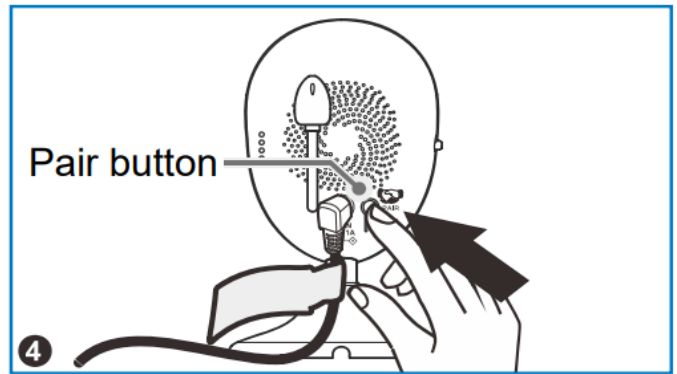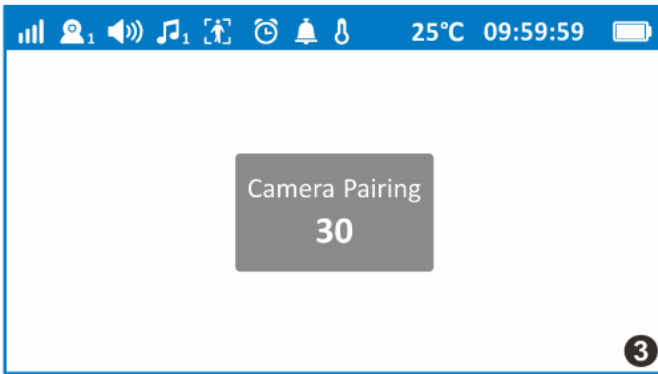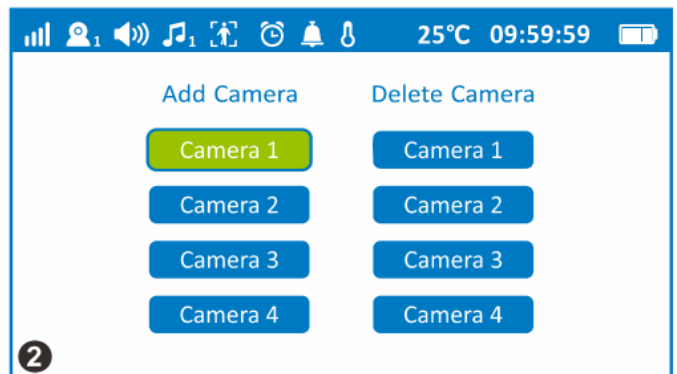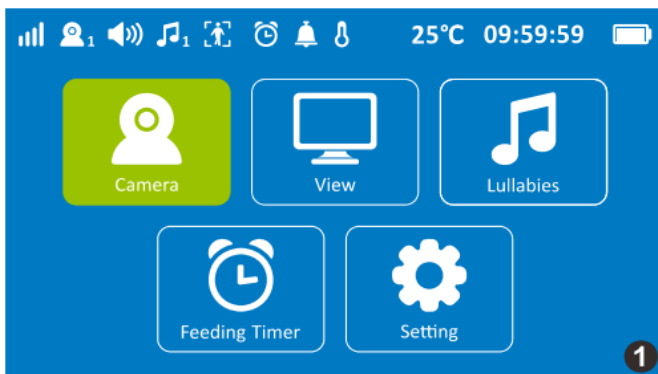



5.2 View

User can change view of different camera (if add different camera).

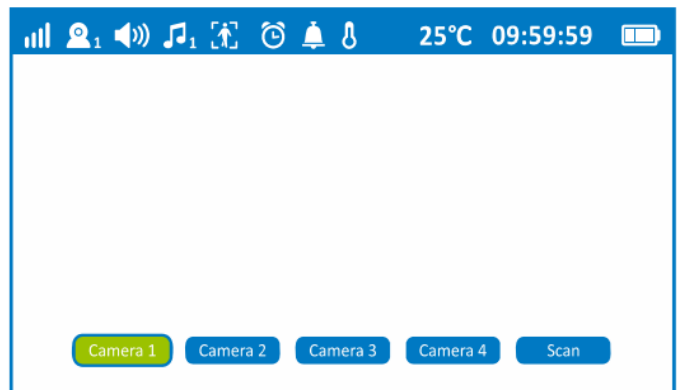


5.3 Lullabies

User can choose lullaby to play from lullabies list. It will automatically single cycle once you chose one of lullaby; If chose All, it will automatically repeat all lullabies list. Press OK button to valid your selection.

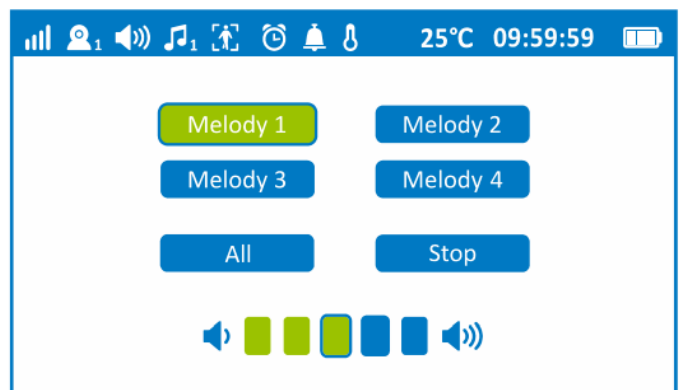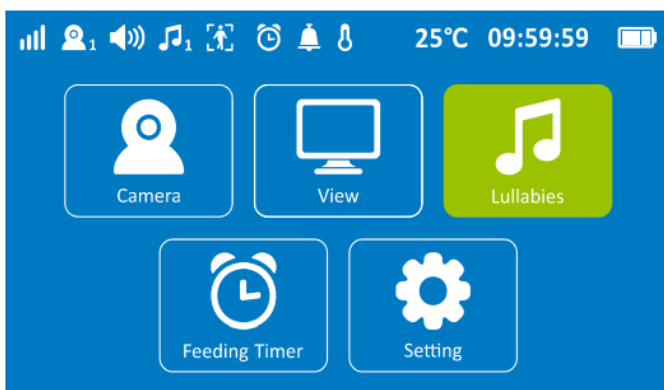


5.4 Feeding Timer

User can choose the time to remind for feeding kids, after selected, count down bar will appear in video view interface, when up to predefined time, monitor will alarm for 5 seconds. Press OK button to valid your selection.


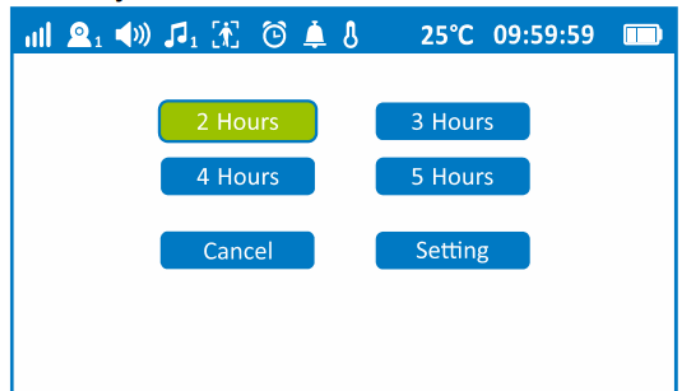


5.5 Setting

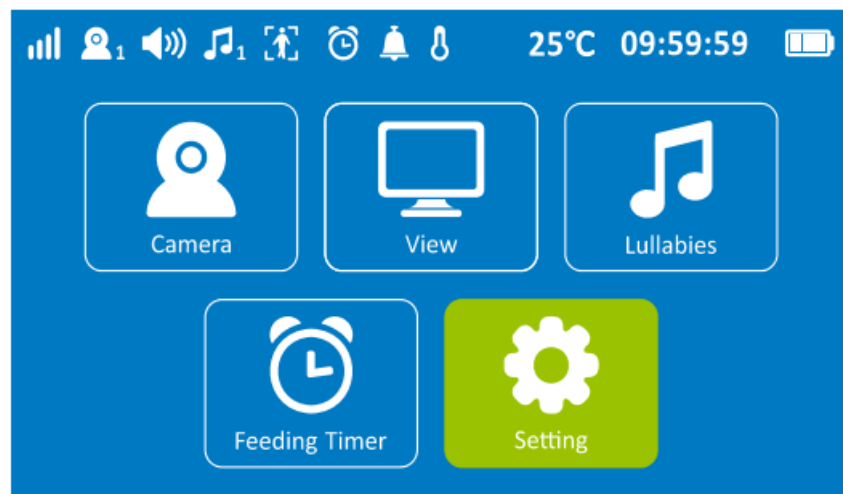



5.5.1 Language Setting

Include 5 languages (English, Español, Français, Deutsch, Dutch). Press OK button to valid your selection.

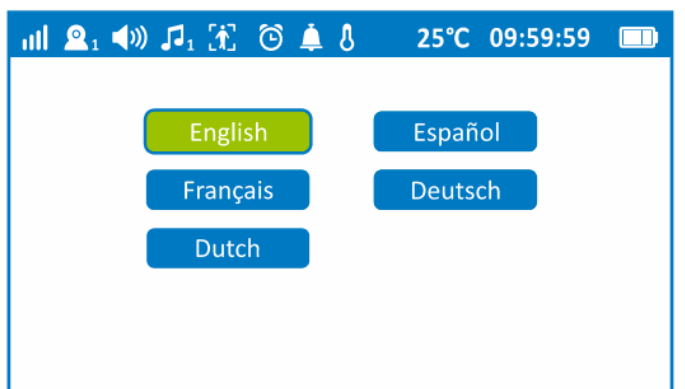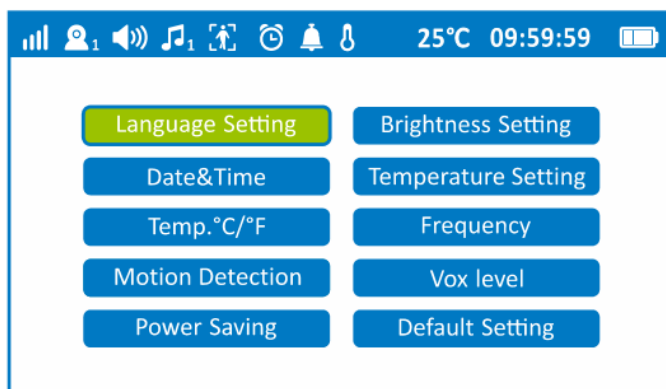

5.5.2 Brightness Setting



Select brightness level (1~5 levels), user right or left arrow to set your level. Press OK button to valid your selection.

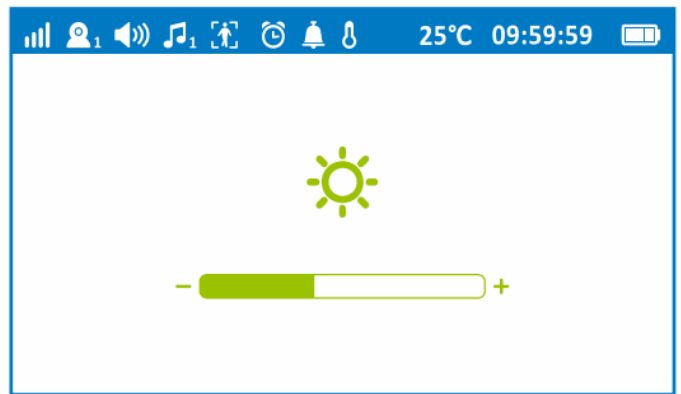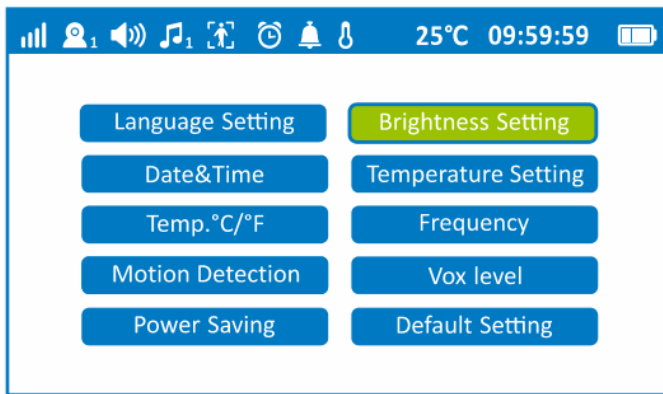

5.5.3 Date & Time

Set date (Year / Month / Day) and Time (Hour / Minute / Second).



Press Up or Down arrow to set the date and use Right or Left arrow to move in the setting. Press OK button to valid your setting.

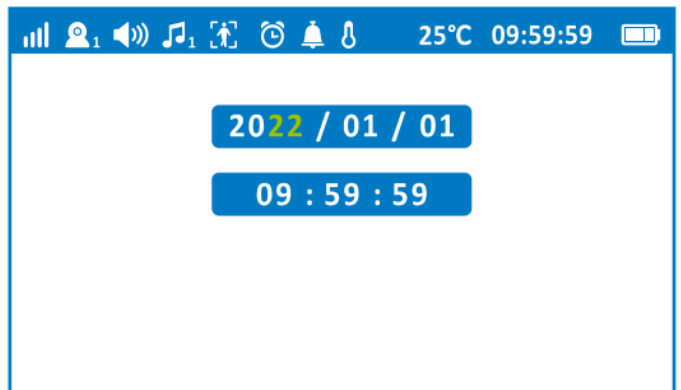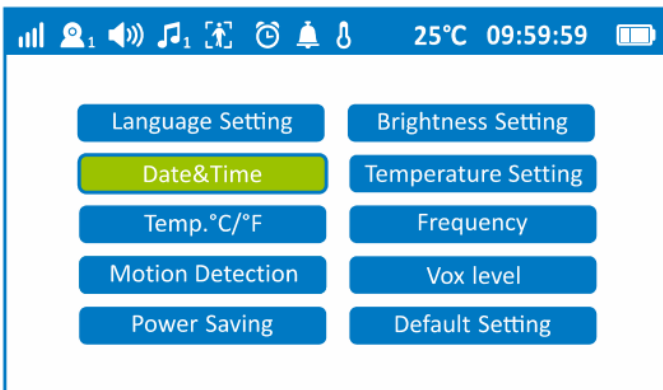

5.5.4 Temperature Alarm



Baby camera detects baby room's temperature. User can set the temperature limit.

Alarm for 5 seconds when over / below limits. Press Up or Down arrow to set the temperature and use Right or Left arrow to move in the setting. Select ON and press OK button to activate the function.

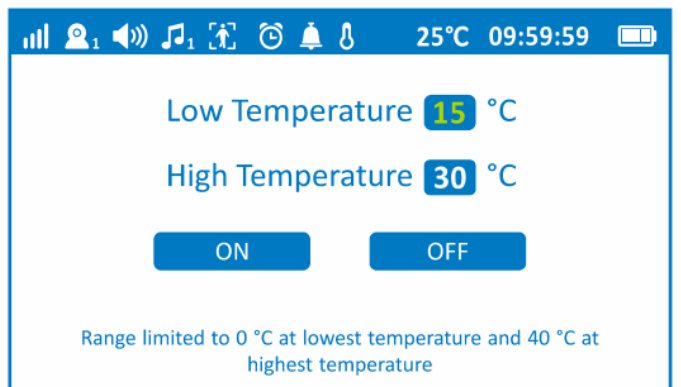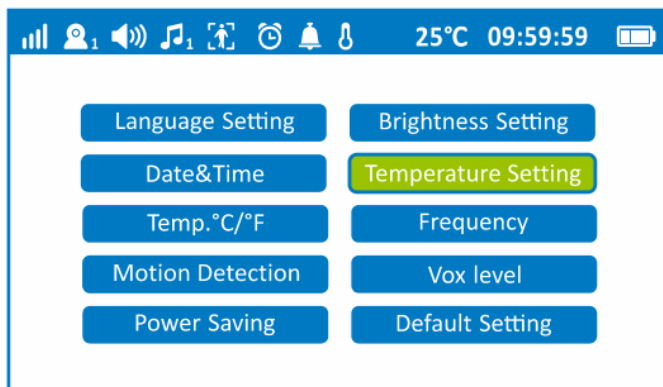



5.5.5 Temp. °C / °F

Select temperature display with Celsius / Fahrenheit (°C / °F). Press OK button to valid your setting.

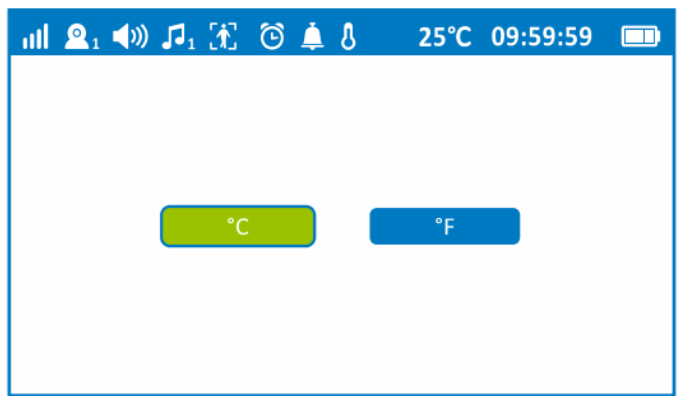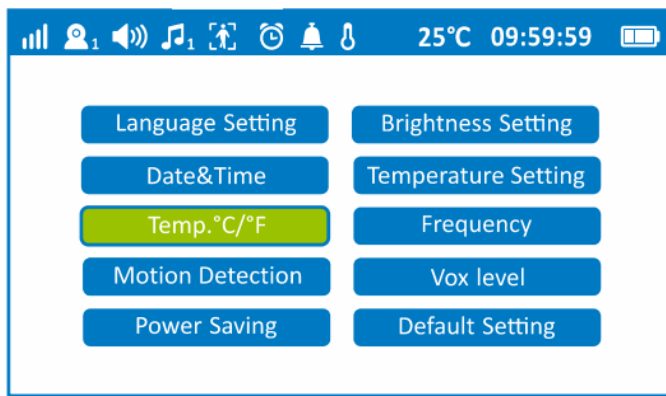



5.5.6 Frequency

User can switch wireless frequency between 60Hz / 50Hz. 60Hz more smoother than 50Hz, but use more battery. Press OK button to valid your setting.

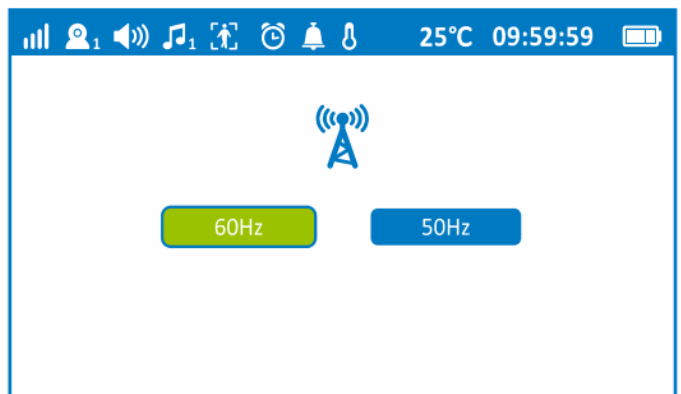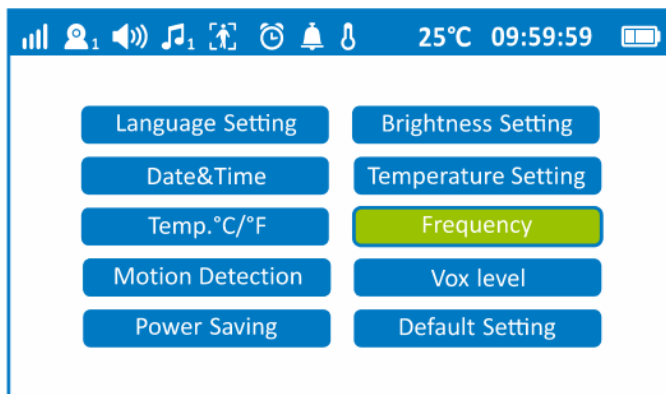


5.5.7 Motion Detecting

By this function selected to ON, user can hear alarm once any movement happened. Press OK button to valid your setting.

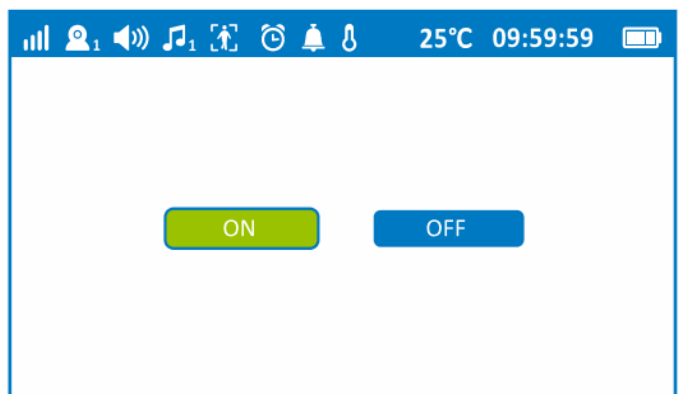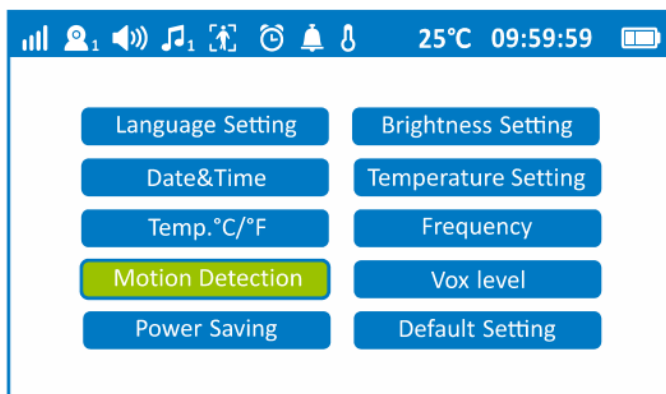


5.5.8 VOX

Select sensitivity level (High, Middle, Low) with Up or Down arrow keys. User can hear alarm once any abnormal sound or noise happened. Press OK button on ON position to active or on OFF to inactivate the function.

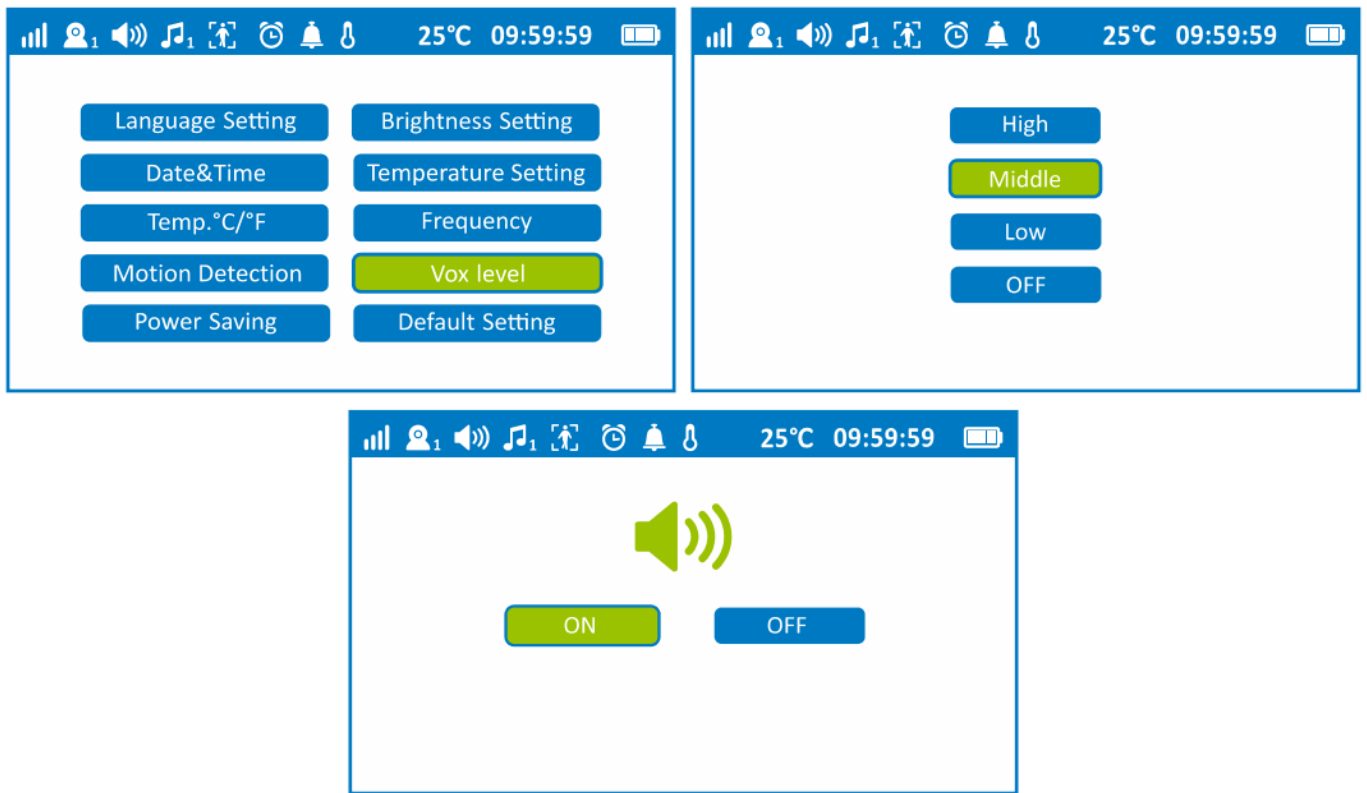


5.5.9 Power Saving (ECO mode)

Select ON/OFF with the Right or Left arrow keys.

Set to ON (the battery icon turn to Orange ) , baby monitor Display sleep automatically within 10 seconds in idle status and press OK button to valid.


Press any key to wake up Display.

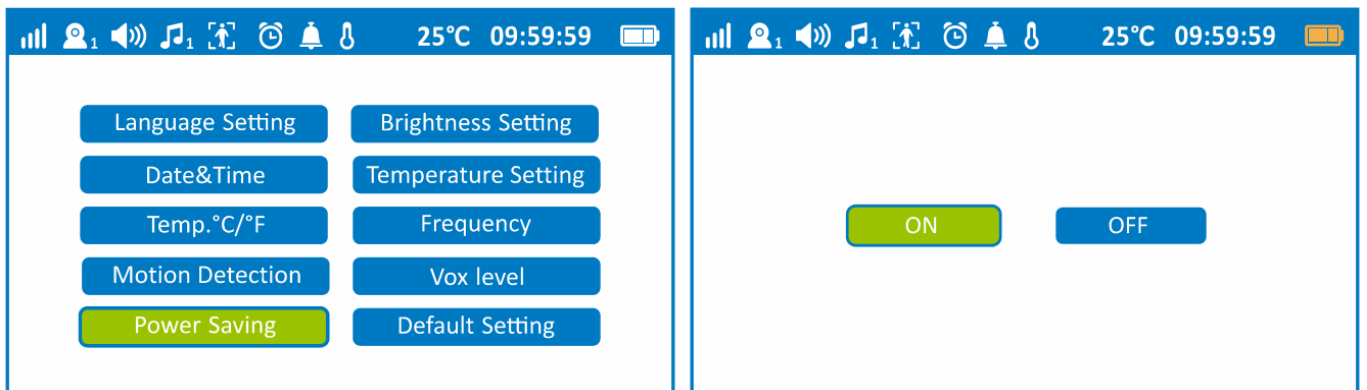

5.5.10 Default Setting

Select ON/OFF to restore factory default setting with the Right or Left arrow keys.

Press OK button to valid your setting.

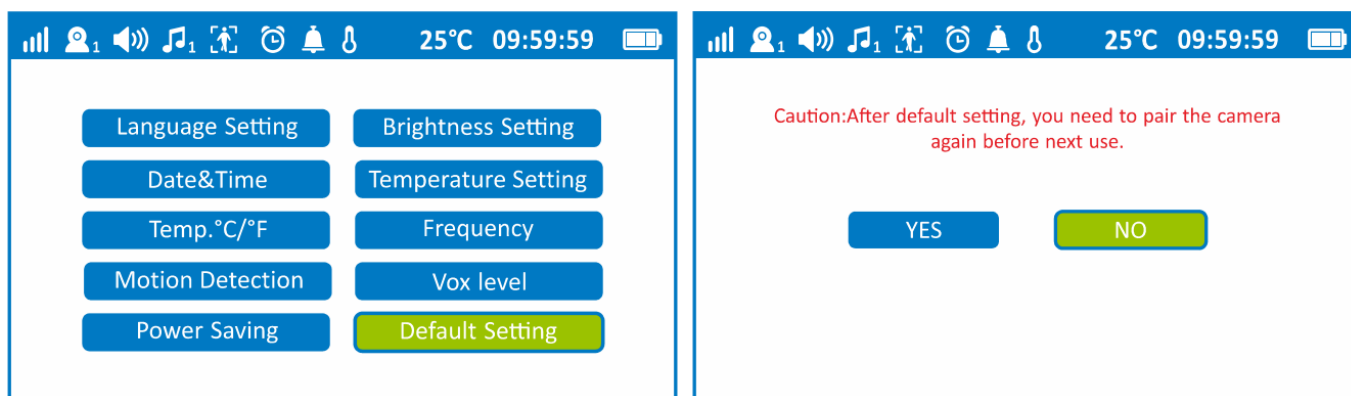

Technical Features

Features	Parameters	Features	Parameters
Two way speaker	Monitor: Speaker: 1W Mic: -42±3dB Camera: Speaker: 1W Mic: -34±3dB	Brightness	5 levels
		Light bar	5 levels
		Volume	5 levels
Temperature detection	0 C-40 C	Multi-language	5 languages (English, Spanish, French, German, Dutch)
H/L temperature alarm	Low Temperature: 15°C High Temperature: 30 C	Upside down view	Rotate 180°
Frequency adjust	50Hz / 60Hz	Power saving	Parent display sleep automatically with 10 seconds in idle status.
VOX	High / Middle / Low	(ECO) mode	
Motion Detection	ON / OFF	Vibration	Voltage: 5V
Feeding Timer	2h, 3h, 4h, 5h setting	Zoom	x 2
Lullabies	4 lullabies	RF power	< 250mW

GUARANTEE

From the moment your Geemarc AMPLICALL™ Sentinel 1 (AC Sen1) is purchased, Geemarc guarantee is for the period of two years. During this time, all repairs or replacements (at our discretion) are free of charge. Should you experience a problem then contact our help line or visit our website at www.geemarc.com. The guarantee does not cover accidents, negligence or breakages to any parts. The product must not be tampered with or taken apart by anyone who is not an authorized Geemarc representative. The Geemarc guarantee in no way limits your legal rights.

IMPORTANT: YOUR RECEIPT IS PART OF YOUR GUARANTEE AND MUST BE RETAINED AND PRODUCED IN THE EVENT OF A WARRANTY CLAIM.

Please note: The guarantee applies to the United Kingdom only.

DECLARATIONS

UKCA Directives

Sentinel 1 (AC Sen1) is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Directive 2014/53/UE.

Geemarc Telecom SA hereby declares that this AMPLICALL™

The UKCA declaration of conformity may be consulted at www.geemarc.com

This equipment has been tested and founded to comply with limits for a class B digital device, pursuant to part 15 of the FCC rules.

Operation is subject to the following two conditions:

1. this device may not cause harmful interference AND
2. this device must accept any interference received, including interference that may cause undesired operation.

Recycling Directives

The WEEE (Waste Electrical and Electronic Equipment) has been put in place for the products at the end of their useful life are recycled in the best way.

When this product is finished with, please do not put it in your domestic waste bin.

Please use one of the following disposal options:

- Remove the batteries and deposit them in an appropriate WEEE skip. Deposit the product in an appropriate WEEE skip.
- Or, hand the old product to the retailer. If you purchase a new one, they should accept it. Thus if you respect these instructions you ensure human health and environmental protection.



For product support and help visit our website at www.geemarc.com

E-mail : help@geemarc.com

telephone 01707 387602

lines are open 09h00 to 16h00 Mon to Fri

Parc de l'étoile, 2 rue Galilée, 59760 Grande-Synthe,
France

This product is made in China To Geemarc Telecom
UGACSen1_EnFrGe_v1.0



Documents / Resources



[geemarc Amplicall Sentinel 1 Video Baby Monitor System](#) [pdf] User Manual

Amplicall Sentinel 1 Video Baby Monitor System, Amplicall Sentinel 1, Video Baby Monitor System, Baby Monitor System, Monitor System

References

- [!\[\]\(5774573cf757c446bb08af21f46b2969_img.jpg\) Home - Geemarc UK](#)
- [!\[\]\(a502cb21d600ba28a5cdf414d68eef89_img.jpg\) STARTSEITE - Geemarc Germany](#)

Manuals+,