

**Gelius GP-BTG-011 Game Controller**



# Gelius GP-BTG-011 Game Controller User Manual

[Home](#) » [Gelius](#) » Gelius GP-BTG-011 Game Controller User Manual 

## Contents

- 1 [Gelius GP-BTG-011 Game Controller](#)
- 2 [Product application instruction](#)
- 3 [Button Illustration](#)
- 4 [Installation and detachable method of right joypad](#)
- 5 [Electrical Parameters:](#)
- 6 [Usage instruction](#)
- 7 [Android/IOS direct-play button mapping:](#)
- 8 [Operation Procedure](#)
- 9 [Android standard game mode:](#)
- 10 [TURBO function](#)
- 11 [Operation Instruction](#)
- 12 [Product list](#)
- 13 [Documents / Resources](#)
  - 13.1 [References](#)
- 14 [Related Posts](#)



**Gelius GP-BTG-011 Game Controller**




## Game Controller GP-BTG-011 Product Manual

### Product application instruction



1. This product supports direct-play mode, without other game app and complex settings and activation operations;
2. This product is compatible with Android/ iOS(iOS 13.0+) smartphone/ tablet, and support for P4/P3/N.S console/PC computer.
3. The extendable size maximum to 135-250mm, able to hold 11 inch ipad pro;
4. The right joypad is detachable, and the left is non-detachable, it can be treated as a single hand gamepad (Support Hot Swap):
5. Accessories includes a wired audio converter module,makes wired audio connection possible;
6. This product support TURBO function,brings better game experience for the player.
7. Ergonomic design, comfortable feeling;
  - Due to mobile system issues, some mobile may not support this device/eg.mobile under MTK platform do not support)
  - Android direct-play mode doesn't support for single joypad, please try the HID mode/ iOS.
  - Due to the official game platform software upgrades or source code changesand other not resist factors caused some of the game can not be played or connected with our Gamepad, Gelius company has no responsibility. Gelius reserve the right of final interpretation for this.

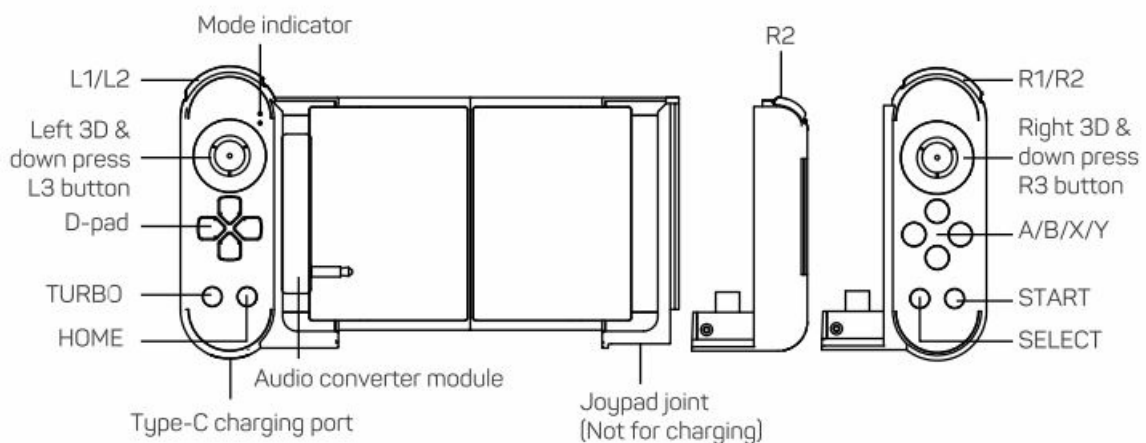

### Button Illustration



## Installation and detachable method of right joypad

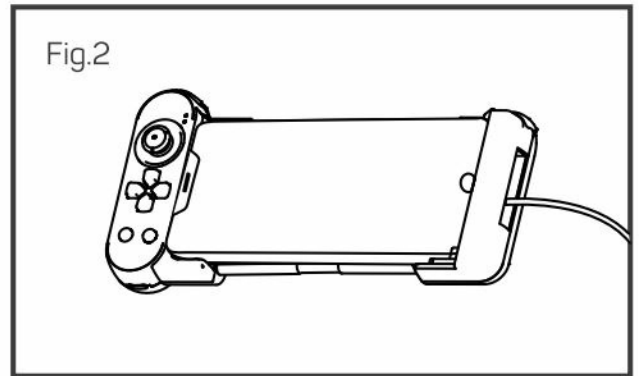
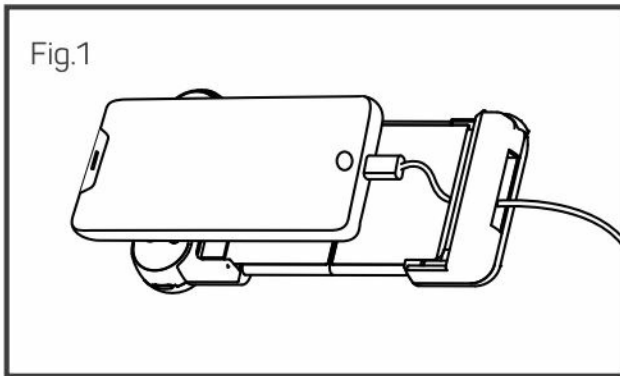
1. Press the right joypad as shown by the arrow in Figure 1 below, and push it upward until the joypad is stuck;
2. The installation is completed, as shown in Figure 2 below;



3. When the right joypad needs to be removed, press and hold the  /  button on the back of the product and pull down the right joypad at the same time to remove the right joypad;

## How to charge the mobile phone while using the gamepad

1. Pass the charging cable through the right
2. The installation is completed, as shown in joypad first, then connect the mobile phone, Figure 2 below; and then align the gamepad in the gamepad slot,;

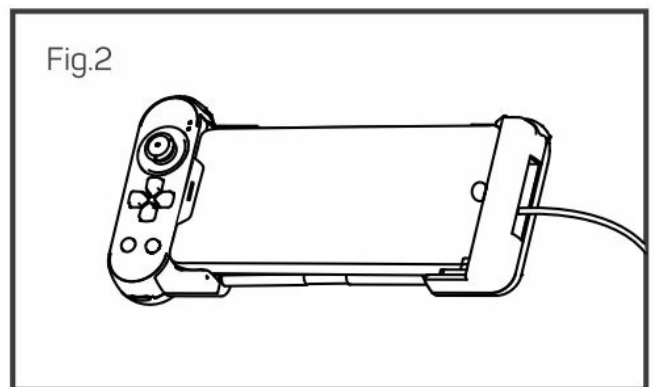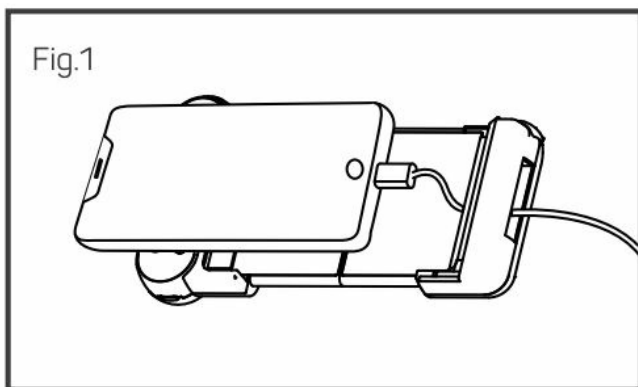

## Electrical Parameters:

1. Working voltage: DC3.7V;
2. Working current: < 15mA;
3. Static current: < 15UA;
4. Play time: > 15H;
5. Input voltage/current: DC5V/500mA;
6. Charging: around 2hrs;
7. BT 5.0, transmission distance: ≤ 8M;
8. Battery: 380mAh;
9. Standby time: 30 days after fully charged;



## Usage instruction

### Android V3 direct-play mode

Press and hold down the "A" + HOME button for around 2 seconds to enter V3 direct-play mode(Android), LED2 start flash quickly, search BT name «GP-BTG-011» on Android mobile/ tablet and connect it! After the connection is successful, the LED2 is always on! Once connected,you can press HOME button directly, LED2 slowly flash, means automatically reconnected!

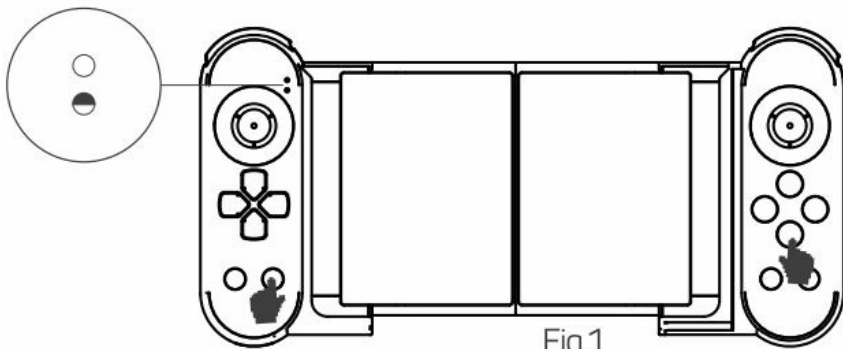


Fig.1

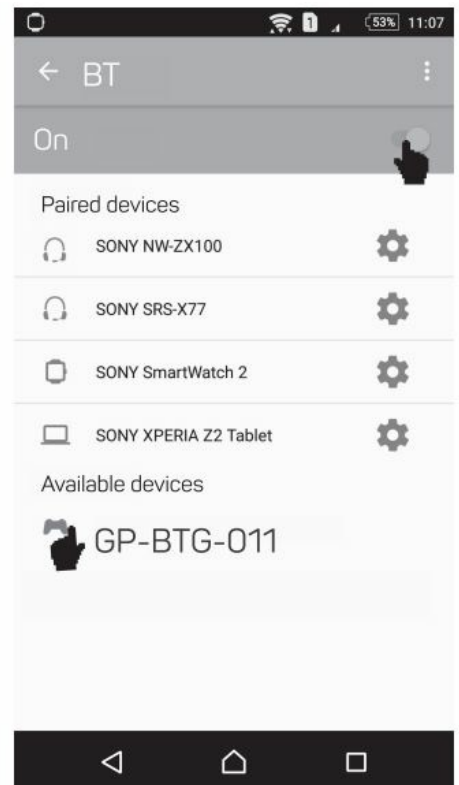


Fig.2

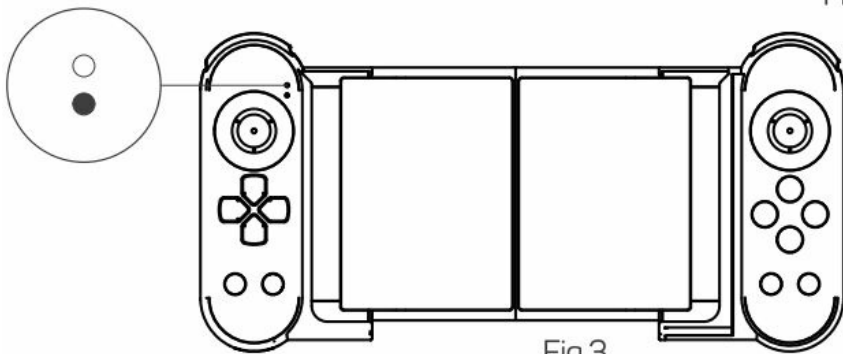


Fig.3

### IOS MFI mode:

Press and hold down the "B" + HOME button for around 2 seconds to enter IOS MFI mode,LED2 start flash quickly, search BT name «DUALSHOC 4 Wireless Controller» on iPhone/tablet and connect it! After the connection is successful, the LED2 is always on! Once connected,you can press HOME button directly, LED2 slowly flash, means automatically reconnected!

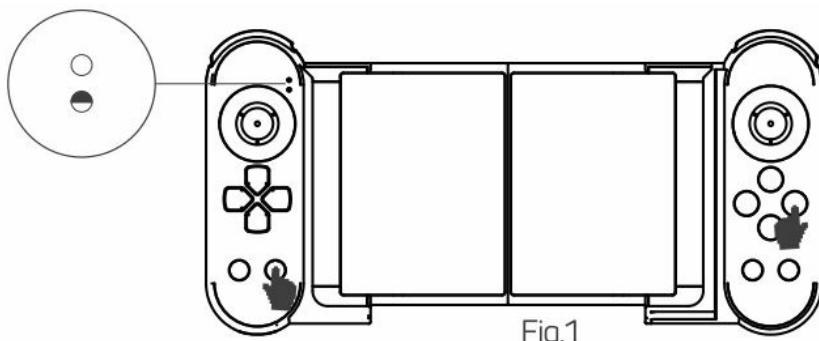


Fig.1

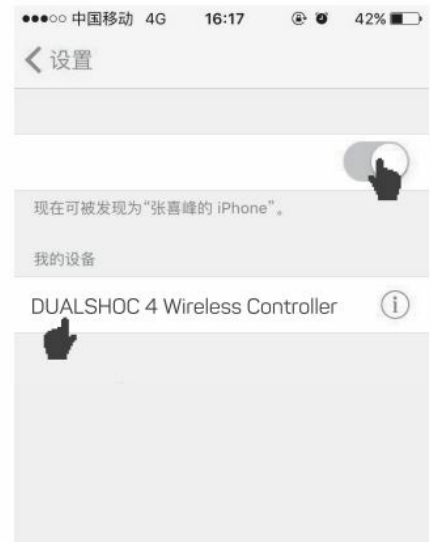


Fig.2

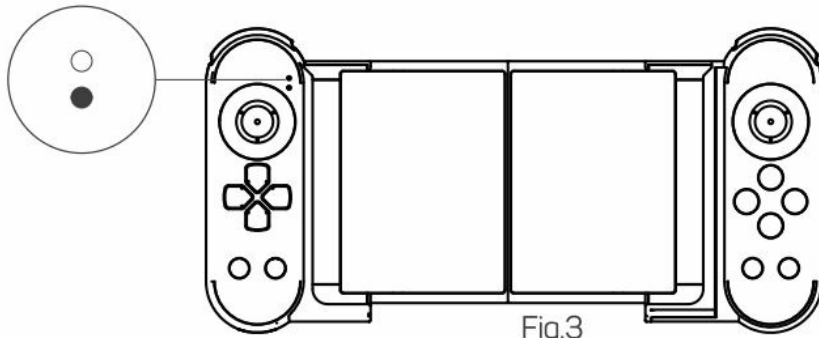


Fig.3

## Android/iOS direct-play button mapping:

### Download the app:

Search for "ShootingPlus V3" in the Apple App Store or Google Play or scan the QR code, download and install the program "ShootingPlus V3".

Configure button mappings.



ShootingPlus V3

iOS single-hand mode operation method (iOS13.4 and above):




## Operation Procedure

1. Install the latest version of ShootingPlus V3 APP on your phone and start it.
2. Click "Device not connected" to enter the Bluetooth settings and turn on Bluetooth.
3. Press the Y+HOME button of the controller at the same time for 2 seconds to enter pairing mode, find and click GP-BTG-011 in the BT list to connect to the device.
4. After the connection is successful, remove the right controller module, return to the main interface, download the presets in the game list, and follow the prompts to set the preset fire button and the fire button in the game, then you can use it.


## Reminder

1. When playing shooting games, turn on the screen horizontal mode and ensure the fire button on the upper left side, go set the button with fire feature accordingly. e.g. PUBG mobile, as shown up in below pic.

1. Tap on V3 icon and enter into edit page, after completed all buttons setting,appoint LB to fire button, the icon appear in the upper left side,and then click"confirm" to save the presetting.

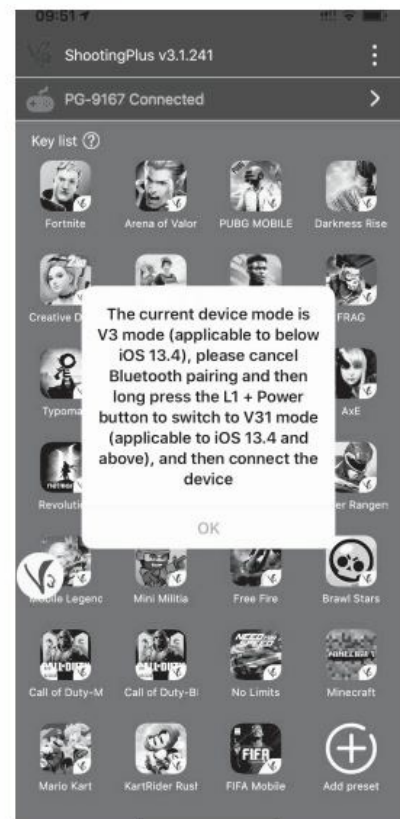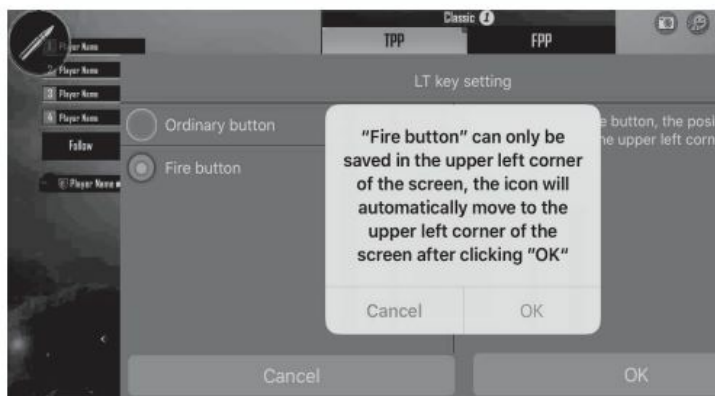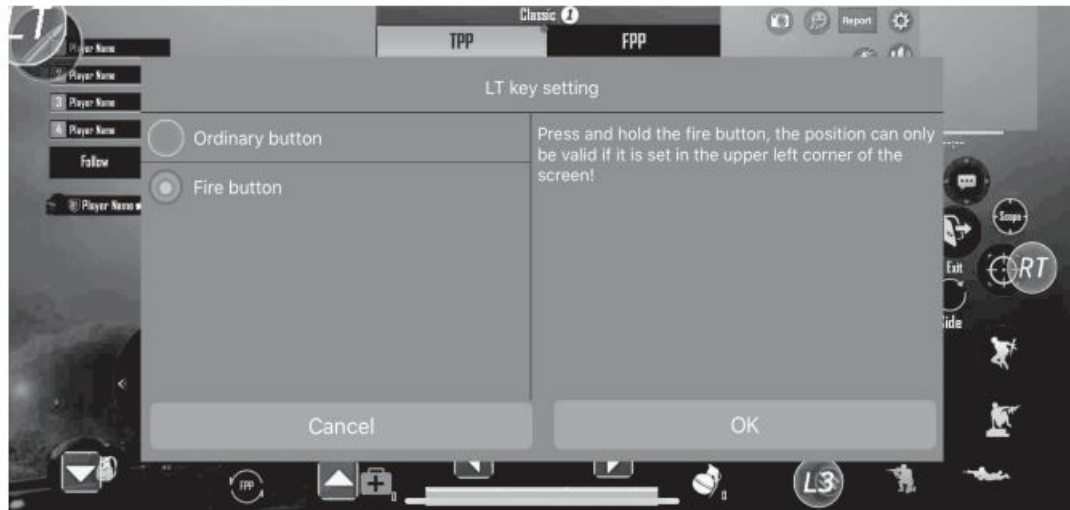


2. Enter the setting page from pubg game, click the operation setting and choose the 1st operation,click" customized layout", and then place the fire button on the upper left side and adjust to match-able size.  
**Reminder:** Pull down the notifications in the middle of screen, which will cause the fire button useless.In this case,keep the game app working and back to homepage,re-enter into the game app, then function will resume to normal.

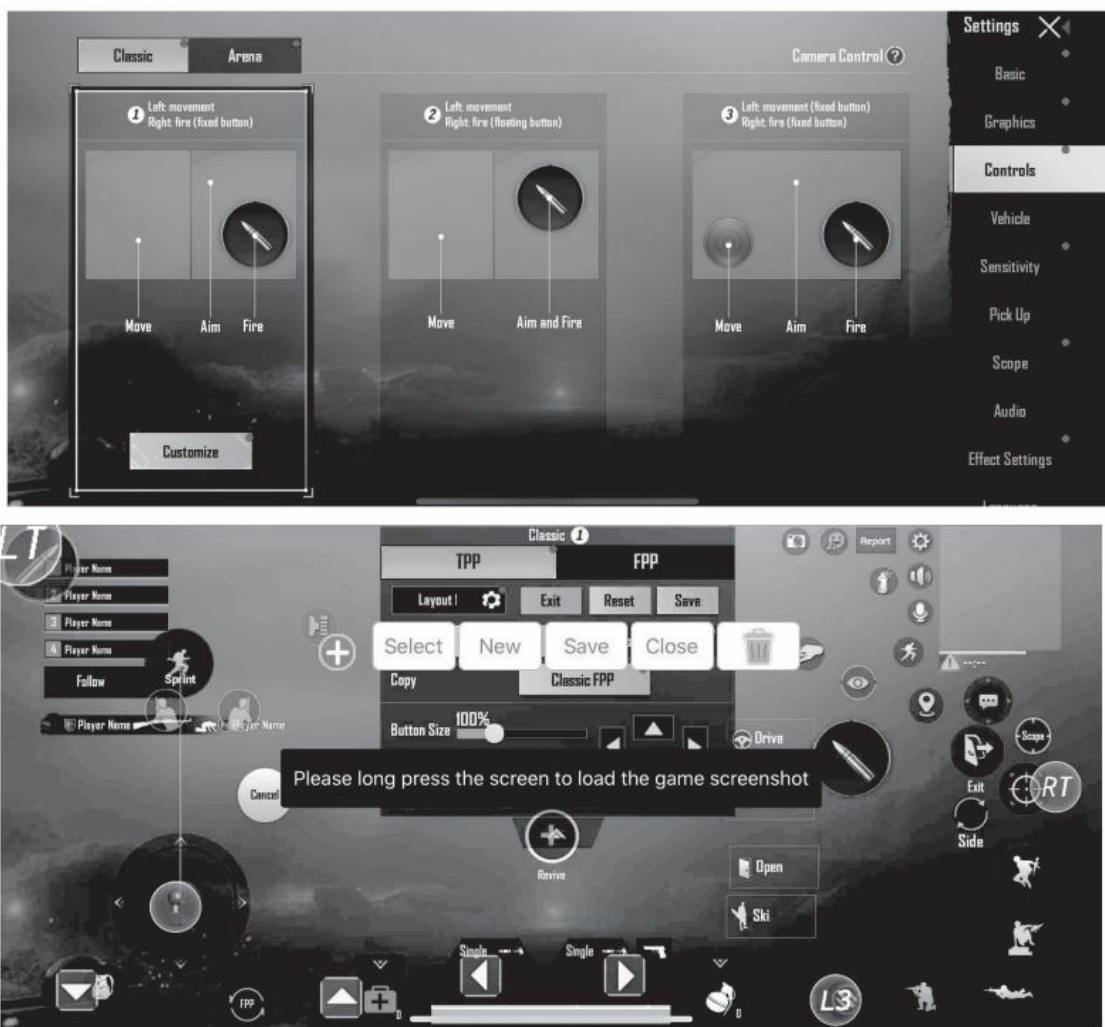

2. Stay in horizontal screen mode during gaming under V3.1 APP.

As shown up in picture: click the icon to lock the screen.

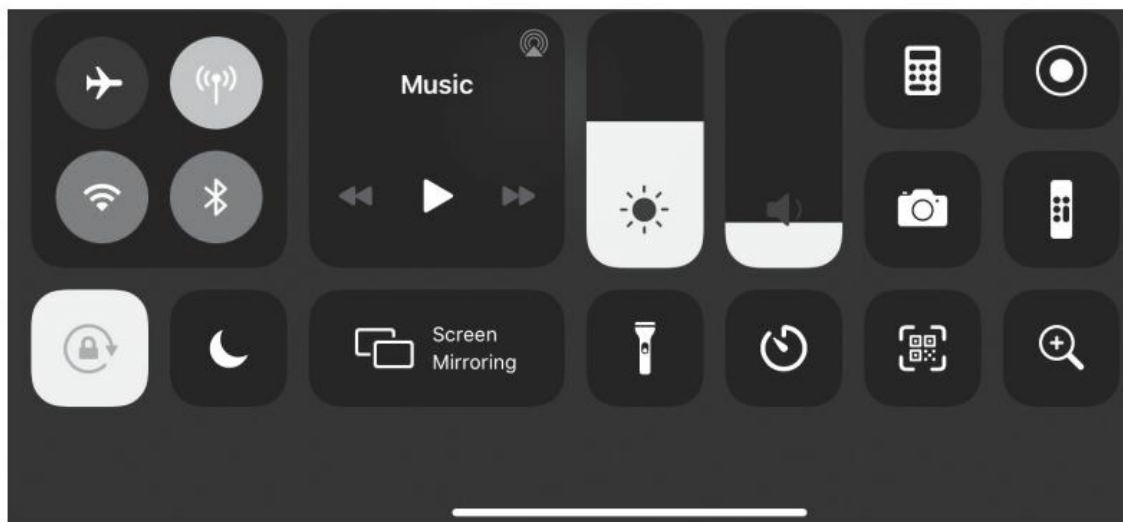

## Android standard game mode:

Press and hold down the 'X' + HOME button for around 2 seconds to enter Android standard game pairing mode, LED2 start flash quickly, search BT name «GP-BTG-011» on Android mobile/table mered your es come to Merel son such metal are rat a mays on!

Once connected, you can press HOME button directly, LED2 slowly flash, means automatically reconnected!

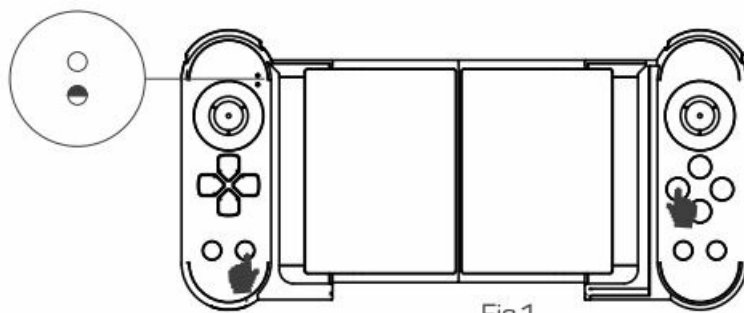


Fig.1

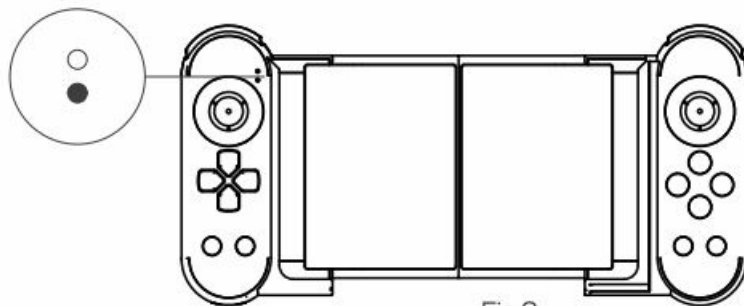


Fig.3

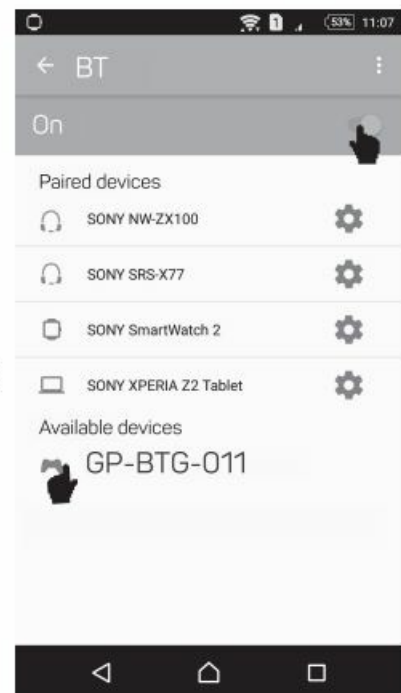


Fig.2

## TURBO function

- Action buttons include {A/B/X/Y/L1/L2/R1/R2} eight buttons, all support to set up TURBO function by manual;
- Setting method: Hold down the action button, then press TURBO button to restart the function, repeat the operation to close down the function;
- After the product sleep, shut down and restart, the previous setting for turbo function is automatically cleared. If the turbo function is enabled, it must be reset!

## Charging/Sleep/Wake-up/Shutdown

### 1. Charging:

- Low power, the LED1 flashes quickly;
- Charging: the LED1 flashes slowly;
- Fully charged: the LED1 is always on;

### 2. Sleep/Wake-up/Shutdown

- Gamepad will shutdown to enter sleep mode if don't have any operation in 10min;
- Once connected, just press HOME button to wakeup and reconnect it to use;
- Under turning on, hold down HOME button for 3 seconds, product shut down, all LED turn off;

### Wired mode:

It will automatically recognizes different mode under wired mode. Connect this product and game device directly with USB data cable. Support playing games on PC, P3 and N-S console.

1. When the PC is in X-input 360 mode, LED2 is always on. Press and hold the HOME button for 3 seconds to switch to D-input P3 mode, LED2 is always on.
2. The N-S console can be automatically identified, and the LED will be always on after the connection is successful.

## Operation Instruction

|   |   |                       |                            |
|---|---|-----------------------|----------------------------|
| BT Connection instruction (press and hold on 3's) | Android BT Mode   |                       | iOS MFI                    |
|   | Direct Play Mode (Android V3)   | Android General model | iOS MFI Mode               |
|   | A+HOME  | X+HOME                | B+HOME                     |
| Indicators  | LED 2   |                       |                            |
| Remark  | Gamepad operation and Touch screen operation are not supported at the same time |                       | Support iOS 13.0 and above |

|   |                            |                   |                          |
|---|----------------------------|-------------------|--------------------------|
| BT Connection instruction (press and hold on 3's) | P4                         | N-S               | One-sided mode(iOS)      |
|   | P4 Wireless Mode           | N-S Wireless Mode | One-sided operation mode |
|   | Insert the data cable+HOME | R2+HOME           | Y+HOME                   |
| Indicators  | LED 2                      | LED 2             | LED 2                    |
| Remark  |                            |                   |                          |


  

|   |  |   |
|---|--|---|
| BT Connection instruction (press and hold on 3's) | Wired mode(connecting by USB data cable )            |   |
|   | P3/N-S/Android Wired mode                            | PC Wired mode   |
|   | Connect the product to the console via the USB cable |   |
| Indicators  | Blue LED light                                       |   |
| Remark  |  | Press and hold SELECT + START at the same time,P3 and 360 modes can switch freely |


#### Notes:

1. Please do not store this product in wet or high-temperature areas.
2. Don't knap, beat, drub, pierce, or try to decompose this product, to avoid unnecessary damage to the product.
3. The product has built-in batteries, and please don't discard them together with the garbages.
4. Don't charge the controller in a place near the fire or other heat source.
5. Non professional personnel should not disassemble the product, otherwise it will not be covered in the after-sales warranty service.

#### Product list

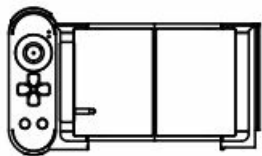

Wireless gamepad x1



Manual x1




Type-C cable x1



Right joystick x1



Audio converter module x1



Right joystick x1

---

## Documents / Resources



[Gelius GP-BTG-011 Game Controller](#) [pdf] User Manual  
GP-BTG-011 Game Controller, GP-BTG-011, Game Controller, Controller

## References

- [User Manual](#)