AMBIUS
SECURITY LIGHT RANGE

IP55
PC

SPECIFICATION SHEET

Product Code:

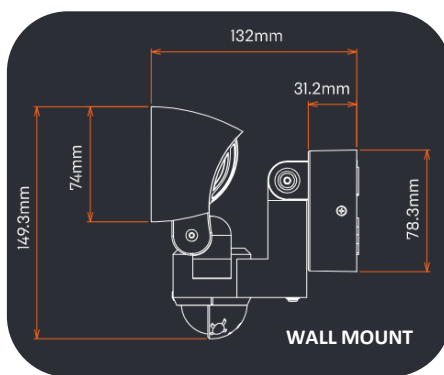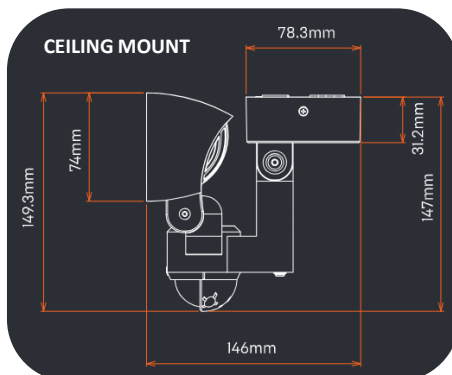|		
White	ASEC16WPC	Q5080635
Black	ASEC16WPCB	Q5080645

CEILING MOUNT

WALL MOUNT

FULLY ADJUSTABLE HEADS
Each Head can be independently adjusted to get the optimum light performance where you require

Rotation   Tilt

LIGHT SPECIFICATIONS
- 16W (2x 8W)
- Colour Temperature/ Lumens:
  3K-1300LM / 4K -1500LM / 5.7K -1400LM
- Non Dimmable
- Power/Lumen Adjustable
- 90° Beam Angle
- 6-8m Detection range
- 150° Detection Angle
- 3/ 30/ 300/ 2000 LUX Adjustment
- Time Adjustment: 10sec - 15min
- Easy mount base plate
- Material: PC
- Estimated Life:LM80 35,000hrs
- 220-240V 50/60Hz.

CEILING MOUNT
78.3mm
31.2mm
74mm
149.3mm
147mm
146mm

WALL MOUNT
132mm
31.2mm
74mm
149.3mm
78.3mm

TIME ADJUSTMENT:
Adjustable 10 seconds to 15 Minutes .
For convenience we have indicated approx. 5 & 9 minute positions.

POWER ADJUSTMENT:
Use the Centre dial marked **DIM**.
There are 4 power positions:
    16 watts / 12 watts / 8 watts / 4 watts
The highest 16W is marked +
Lowest which is 4W is marked –
The other two marking are 8 & 12watts

LUX ADJUSTMENT:
To operate in daylight, position at the mark +.
To operate at Night position at the mark – (3 lux)
The other 2 positions are for low light as indicated (approx. 30 & 300 lux)

3000K
4000K
5700K

Colour Temp
3K 4K 5.7K

Base Mount

Sensor Settings
TIME
LUX
DIM

3 Pin connection
TOP