

**Generic  
BT1502  
Foldable  
Bluetooth  
5.2  
Keyboard**



## Generic BT1502 Foldable Bluetooth 5.2 Keyboard User Manual

[Home](#) » [Generic](#) » Generic BT1502 Foldable Bluetooth 5.2 Keyboard User Manual 

### Contents


- [1 Generic BT1502 Foldable Bluetooth 5.2 Keyboard](#)
- [2 Product Appearance and Specifications](#)
- [3 Product Features](#)
- [4 Connection Instructions](#)
- [5 Keyboard Maintenance](#)
- [6 Warranty Card](#)
- [7 FCC Statement](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

# Generic

**Generic BT1502 Foldable Bluetooth 5.2 Keyboard**



## Product Appearance and Specifications

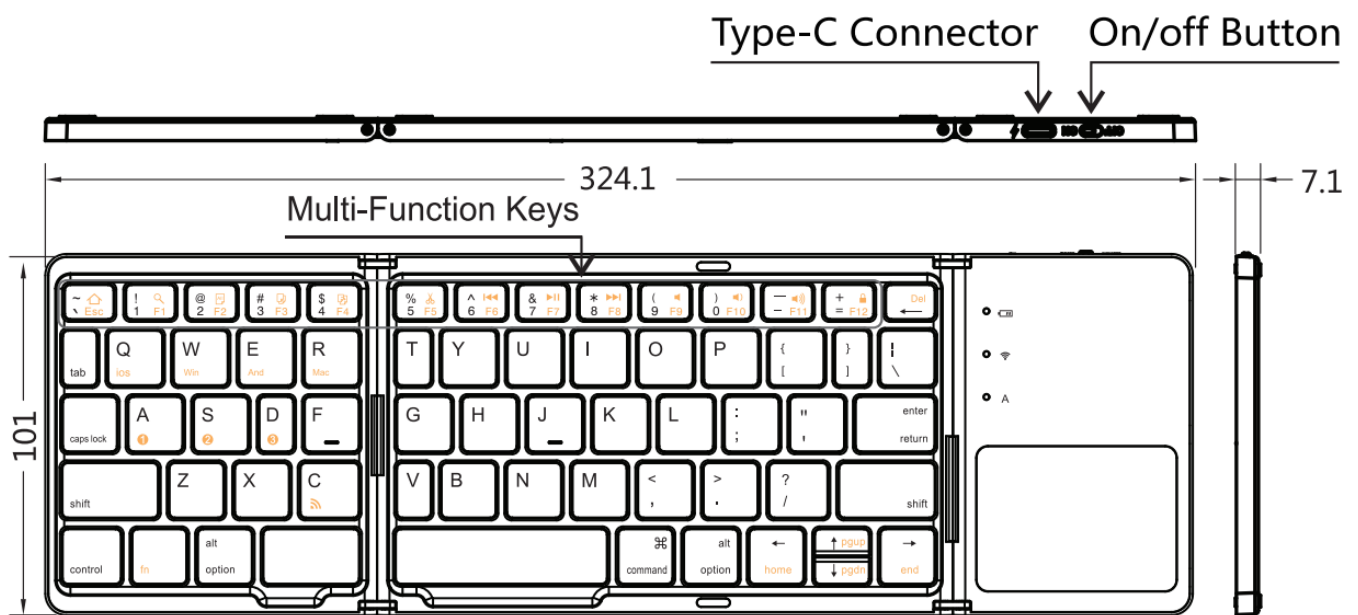








































- **Compatible system:** Windows/iOS/Android/ Mac.

## Technical Specifications:

- **Keyboard size:** 324.1x101x7.1mm (open). 162.6x101x13.7mm (folding).
- **Use the touchpad with a working current:** of <12.0mA.
- **Standby current:** <1.6mA.
- **Key working current:** <4mA Working.
- **Sleep current:** 20uA.
- **Sleep time:** Ten minutes.
- **distance:** 10m.
- **Lithium battery capacity:** 180mAh.

- **Awaken way:** Press the key.
- **Working voltage:** 3.7V.
- **Touchpad size:** 56.5×40.5 mm.
- **Weight:** 160g.










## Product Features

Fn+	iOS/Mac Android	Fn+ shift	Windows	Fn+	Windows
	Return to Desk		Open the browser		Esc
	Search		Search		F1
	Select		Select		F2
	Copy		Copy		F3
	Stick		Stick		F4
	Cut		Cut		F5
	Pre-Track		Pre-Track		F6
	Play/Pause		Play/Pause		F7
	Next		Next		F8
	Mute		Mute		F9
	Volume-		Volume-		F10
	Volume +		Volume +		F11
	Lock		Lock		F12

## Three system switching language:

- **Windows:** Alt+Shift switch language.
- **iOS/Mac:** Ctrl+Space key switch language.
- **Android:** Shift+Space key switch language.



## Multi-channel connection:

- When connecting the first device, press Fn+ , then press Fn+  to pair the code to start the connection.
- When connecting the second device, press Fn+ , then press Fn+  to pair the code to start the connection.
- When connecting the third device, press Fn+ , and then press Fn+  to pair the code to start the connection.
- When using multiple devices at the same time, press the Fn+    switch to the connected device freely.



## Connection Instructions

### iOS Connection instructions:

1. Please turn on the keyboard power switch. Once the red light illuminates, select the channel and press the Fn+C Key. The blue light will flash, indicating that the keyboard has entered the pairing mode.
2. Open the setup button at the starting interface and select "Bluetooth", then search.

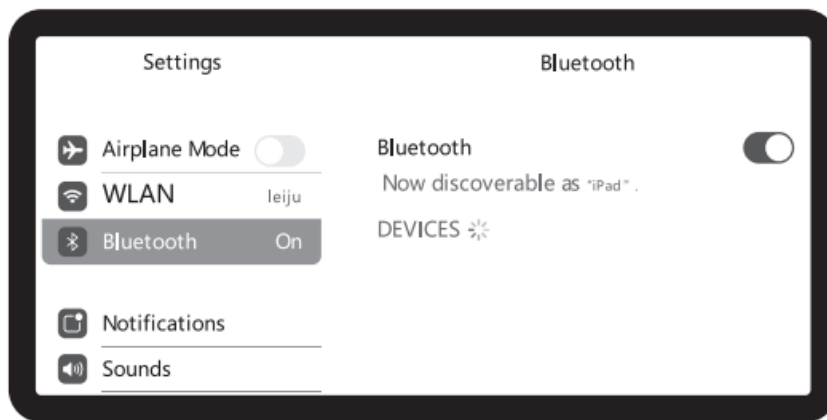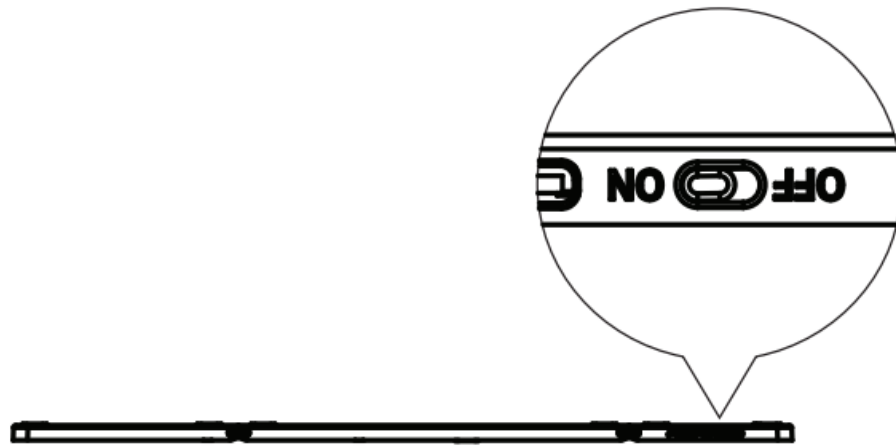


3. You will find the " BT keyboard", and click the pairing name to connect.
4. There is a tip for connecting successfully, you can use your keyboard comfortably.

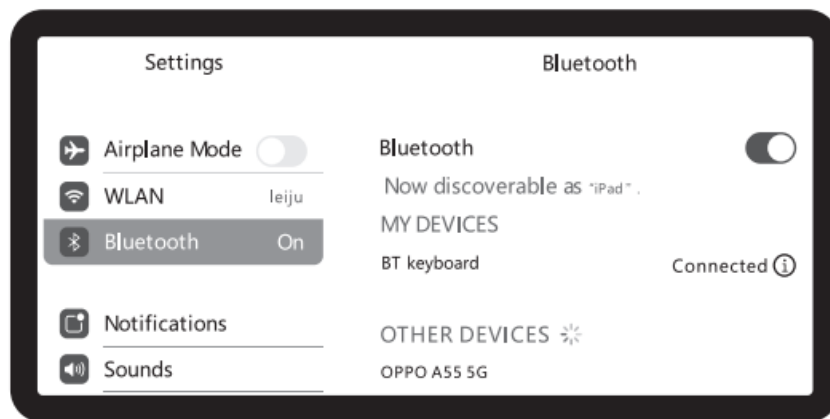
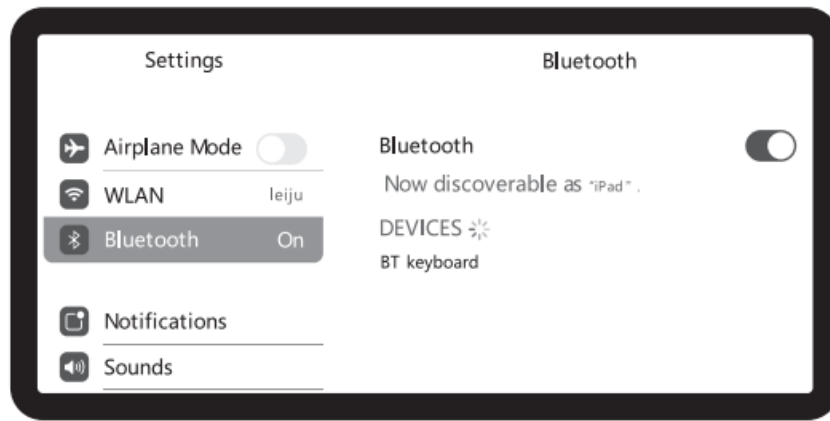


### Mac Connection instructions:

1. Please turn on the keyboard power switch. Once the red light illuminates, select the channel and press the Fn+C Key. The blue light will flash, indicating that the keyboard has entered the pairing mode.
2. Open the Mac System Preferences and select "Bluetooth", then search.

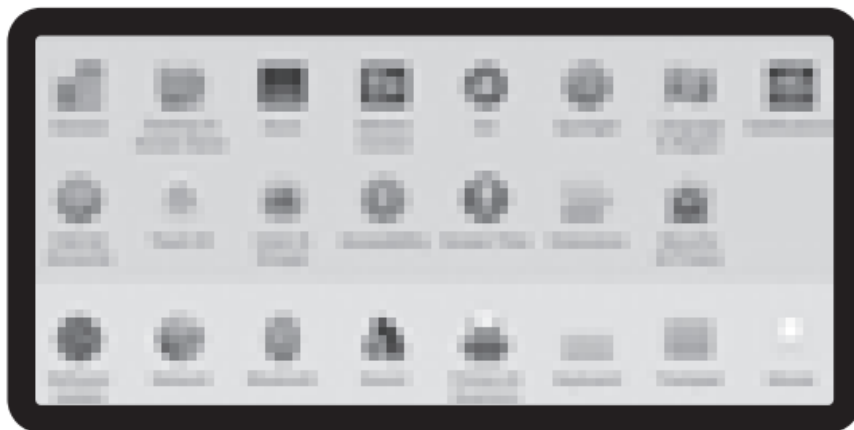



3. You will find the “BT keyboard”, and click the pairing name to connect.
4. There is a tip for connecting successfully, you can use your keyboard comfortably.

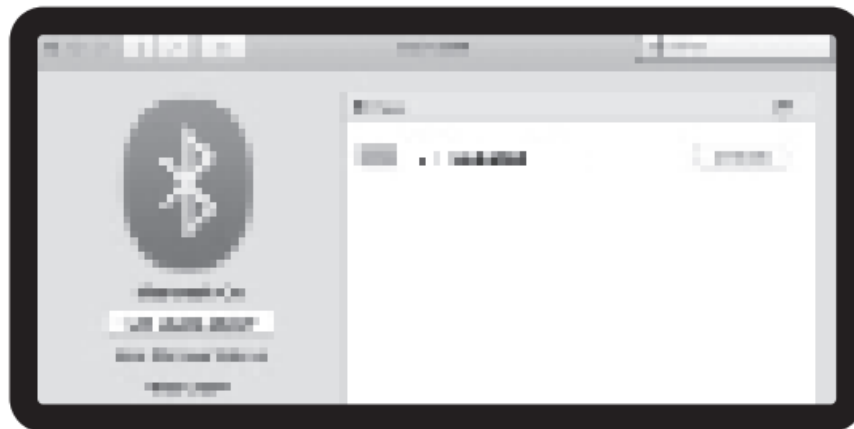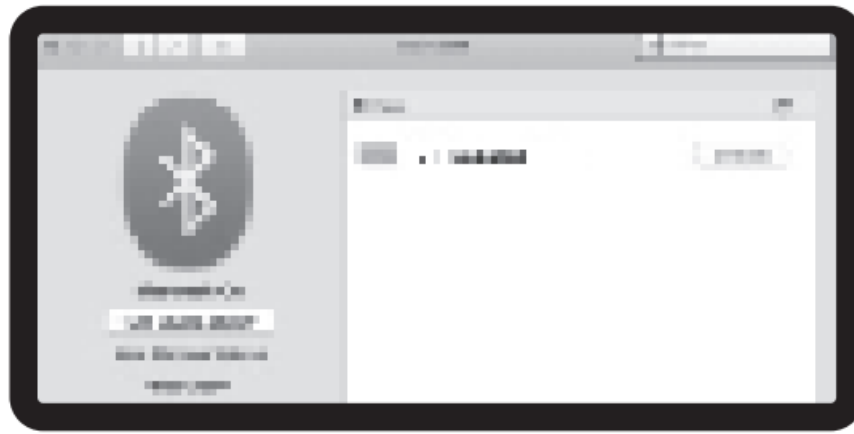



#### **Win 10 Connection instructions:**

1. Please turn on the keyboard power switch. Once the red light illuminates, select the channel and press the Fn+C Key. The blue light will flash, indicating that the keyboard has entered the pairing mode.
2. Open settings, turn on Bluetooth, and click Add Bluetooth or other devices.




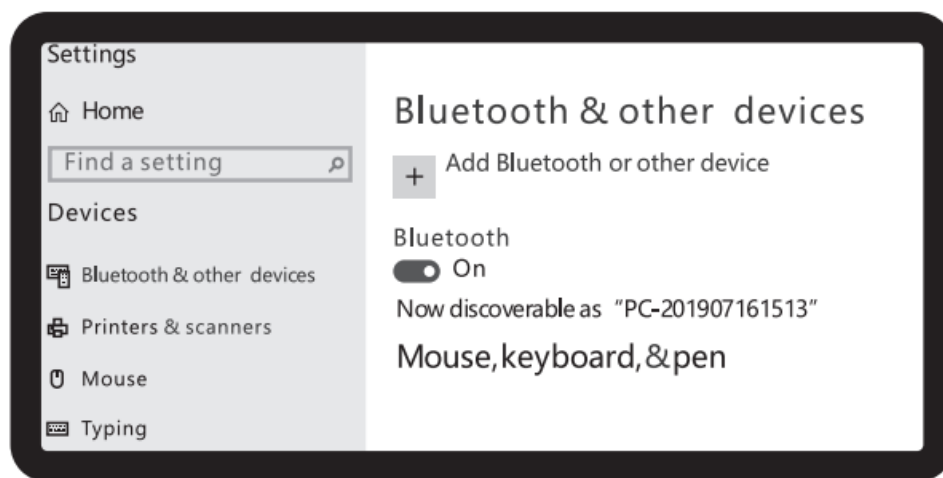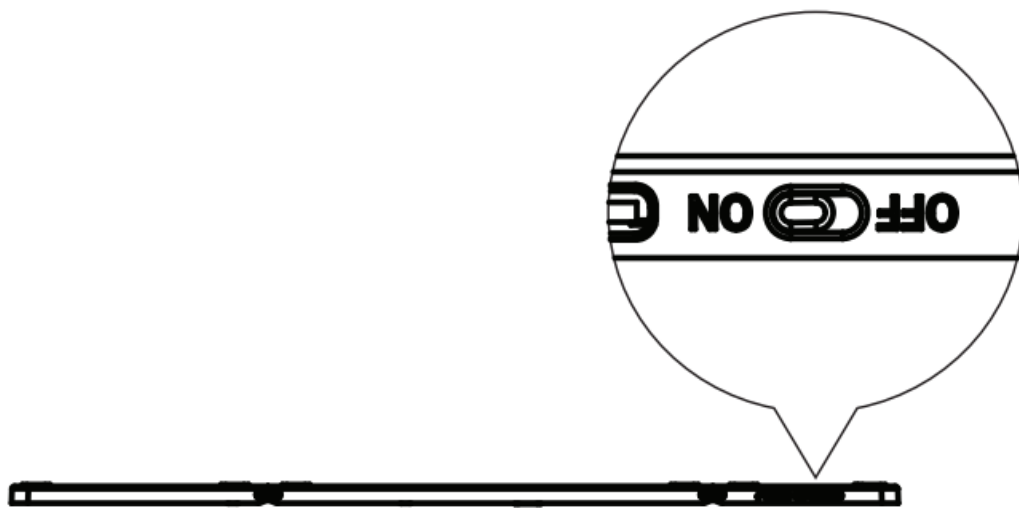

3. Select "Bluetooth" in the Add Device to search.
4. You will find the " BT keyboard", and click the pairing name to connect.

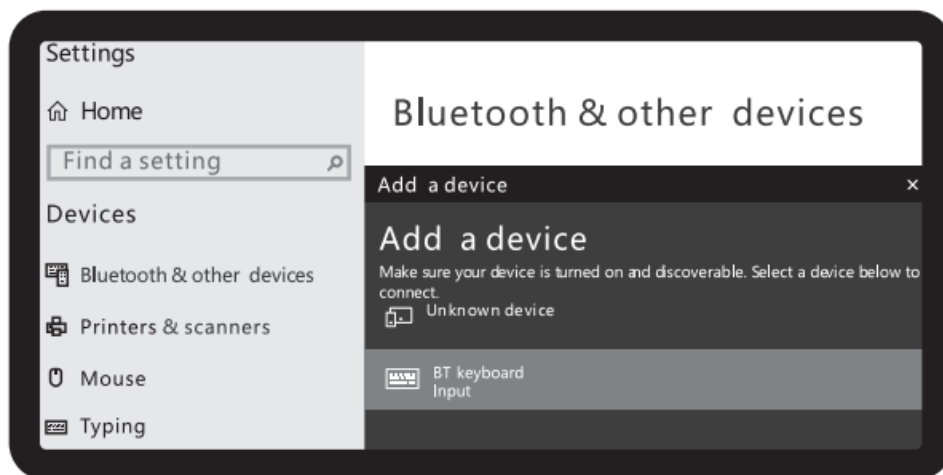
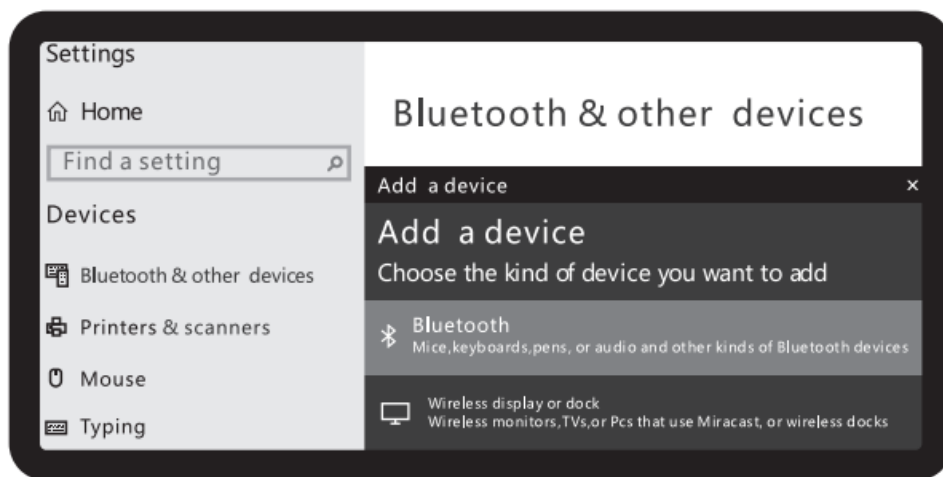


5. There is a tip for connecting successfully, you can use your keyboard comfortably.


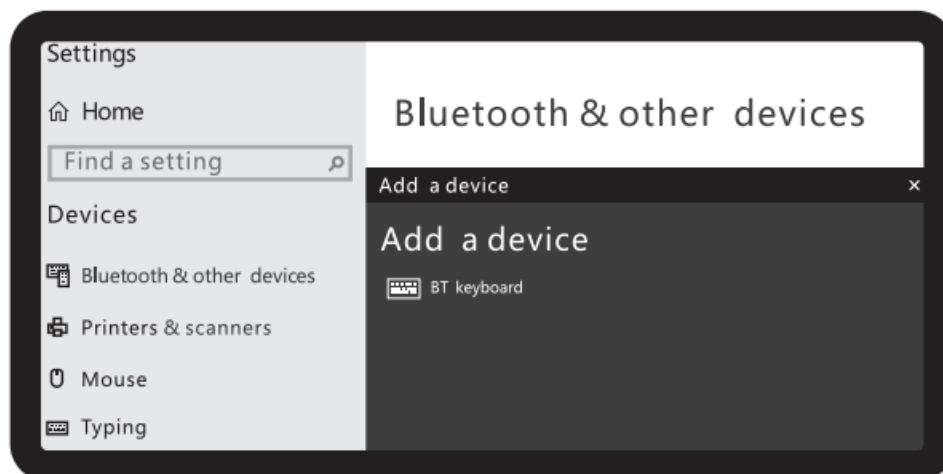


#### Android Connection instructions:

1. Please turn on the keyboard power switch. Once the red light illuminates, select the channel and press the Fn+C Key. The blue light will flash, indicating that the keyboard has entered the pairing mode.
2. Open the tablet PC setting "Bluetooth" into searching and pairing status.

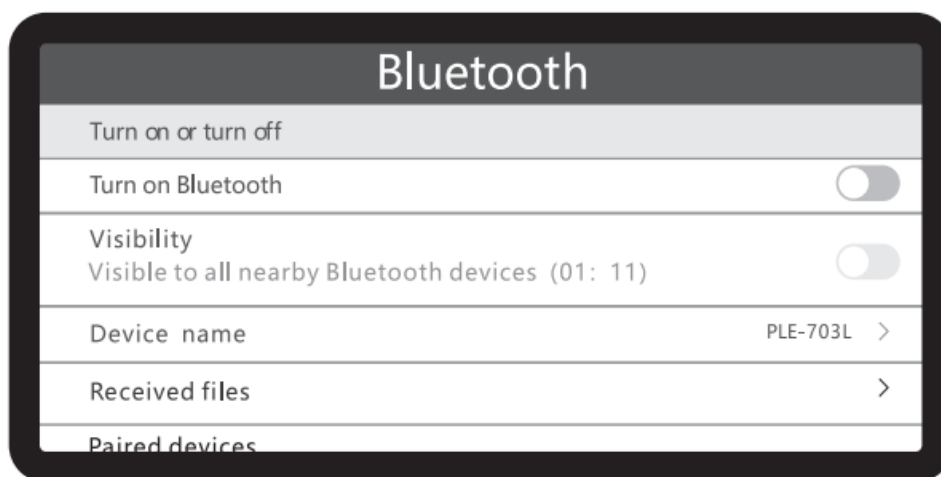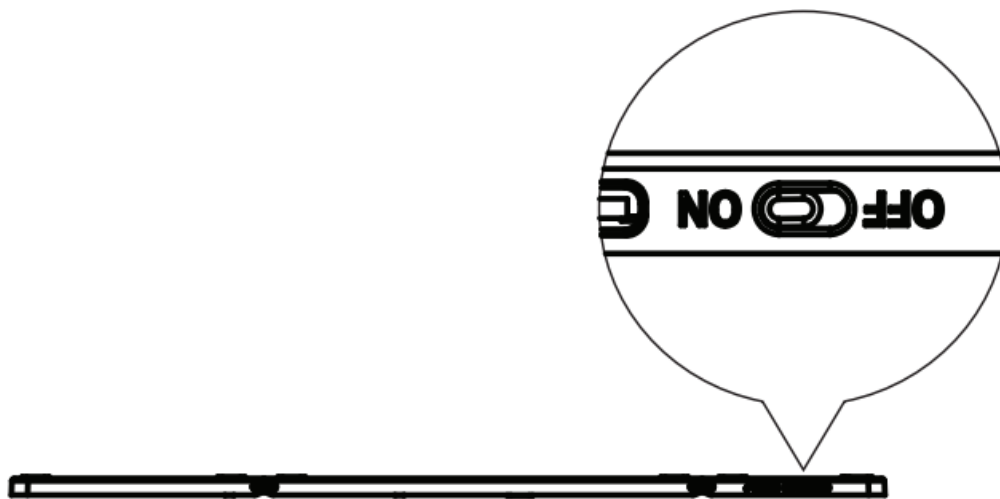

3. You will find the "BT keyboard", and click on the next step.
4. There is a tip for connecting successfully, you can use your keyboard comfortably.

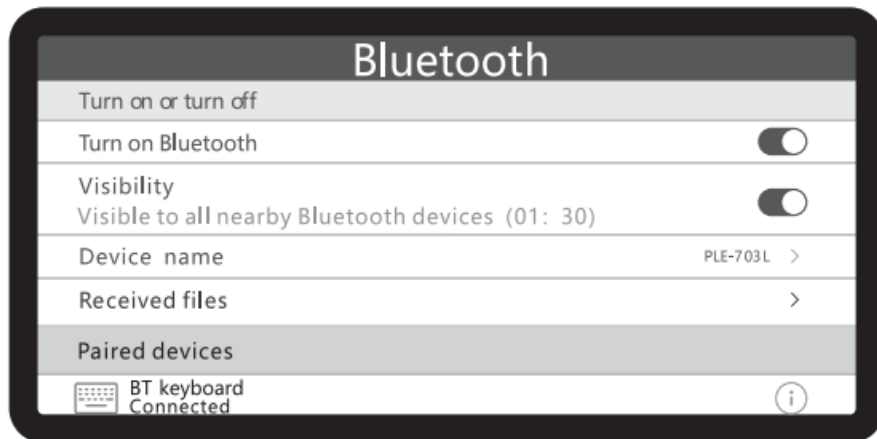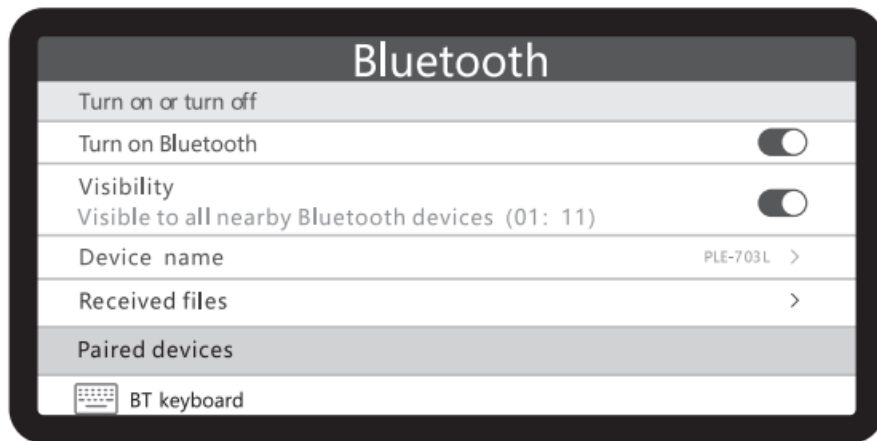


**Remarks:** After connecting successfully the next time you don't need a match code, just open the Bluetooth keyboard power switch and the tablet PC" Bluetooth." The BT keyboard will search the device and automatically connect.


**Windows Multi-Trackpad Gestures:**




Tap to click  
Tap with one finger to click



Secondary Click(right-click)  
Click or tap with two fingers



Scroll  
Slide two fingers up or down to scroll



Zoom in or out  
Pinch with two fingers to zoom in or out




Search  
Click or tap with three fingers to open search




Swipe left with three fingers  
to move between full-screen apps



Swipe up with three fingers  
to see all tasks you're using



Swipe right with three fingers  
to move between full-screen apps



Swipe down with three fingers  
to show your desktop




Click or tap with four fingers  
to open action center

#### Android Multi-Trackpad Gestures:



Tap to click  
Tap with one finger to click



Scroll  
Slide two fingers up or down to scroll


#### iOS Multi-Trackpad Gestures:




Tap to Click  
(Can customize)




Tap with three  
fingers to go to  
home screen




Zoom in or out  
Pinch with two fingers  
to zoom in or out



Slide two fingers left  
or right to scroll screen



Scroll  
Slide two fingers up or  
down to scroll




Swipe down with three  
fingers to see all app  
you're using



Tap with four  
fingers to make a  
screenshot  
( cmd+shift+4 )



Swipe left with  
three fingers to move  
between full-screen apps  
( cmd+shift+tab )



Swipe up with three  
fingers to show the  
dock ( cmd+alt+D )




Swipe right with  
three fingers to move  
between full-screen apps  
( cmd+tab )


### Customization:

Setting – Accessibility – Touch – Assistive touch – Devices – Choose a keyboard to match, then customize your gestures.

### Mac Multi-Trackpad Gestures:




Tap to Click  
(Can customize)




Zoom in or out  
Pinch with two fingers to zoom in or out



Tap twice and hold to drag



Slide two fingers left or right to scroll screen



Scroll  
Slide two fingers up or down to scroll



Swipe right with three fingers to move between full-screen apps (cmd+tab)



Swipe left with three fingers to move between full-screen apps (cmd+shift+tab)

### Status of Indicator Light:

- Turn on the keyboard power switch, and the red indicator light will illuminate as a prompt.
- During pairing, the blue signal indicator light will flash as a prompt
- When the Caps Lock is engaged, the green indicator light will illuminate.
- During the charging, the red indicator light will illuminate, and it will turn off when the battery is fully charged.
- When the keyboard battery is in low voltage, the red indicator light will flash, indicating that the keyboard needs to be charged.
- When the keyboard is awakened from sleep mode, the red indicator light will illuminate as a prompt.

### Energy-Saving Mode:

1. When the keyboard is ordered without any operation instructions for 10 minutes, it will automatically enter a low-power sleep mode. To use it again, simply press any key on the keyboard and wait for  $\leq 4$  seconds, then the keyboard will be awakened and ready for normal use.
2. When the keyboard will not be used for an extended period, please turn off the power switch to extend battery life.

### Keyboard Maintenance

1. Please keep the keyboard away from a liquid or humid environment, saunas, swimming pool, or steam room, and don't let the keyboard get wet in the rain.
2. Please don't expose the keyboard at too high or too low temperature condition.
3. Please don't put the keyboard under the sun for a long time.

4. Please don't put the keyboard close to the flame, such as in cooking stoves, candles, or fireplaces.
5. Avoid sharp objects scratching products, and timely to recharge products to ensure the normal use.

## FAQs

### 1. The tablet PC can't connect to the BT keyboard?

1. First check the BT keyboard is in a match code state, then open the table PC Bluetooth searching.
2. Checking the BT keyboard Battery is enough, the battery low also leads to can't connect, so you need to charge.

### 2. Is the keyboard indication light always flashing when used?

- The keyboard indication always flashes when used, it means the keyboard will have no power, please charge the power as soon as possible.

### 3. The table PC display BT keyboard is disconnected?

- If the Bluetooth keyboard is not used for a while, the device will automatically enter the sleep state to save power. Press any key on the keyboard to wake up, and the Bluetooth connection will be automatically restored.

## Warranty Card

### User information

**Company or personage full name**

\_\_\_\_\_.

**Contact address** \_\_\_\_\_

\_\_\_\_\_.

**TEL** \_\_\_\_\_ . **Zip** \_\_\_\_\_.

**The purchased product name and model NO.**

\_\_\_\_\_.

**Purchased date** \_\_\_\_\_.

This reason due that the product is broken and damage is not included in the warranty.

1. Accident, misuse, improper operation, or any unauthorized repair, modification, or removed.
2. Improper operation or maintenance, when operation violation of the instructions or connection suitability power supply.
3. Or use consumables (such as spare batteries) that are not provided by the company, but applicable laws Except where such restrictions are prohibited.





## FCC Statement

This device complies with part 15 of the FCC rules.

### Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, under part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used per the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

**Note:** Please read the user manual carefully before you start using this product.

## Documents / Resources



[Generic BT1502 Foldable Bluetooth 5.2 Keyboard](#) [pdf] User Manual  
2BEMV-BT1502, 2BEMVBT1502, bt1502, BT1502 Foldable Bluetooth 5.2 Keyboard, BT1502, Foldable Bluetooth 5.2 Keyboard, Bluetooth 5.2 Keyboard, Keyboard

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.