



# globe 50108 WiFi Smart Security Camera Instructions

[Home](#) » [globe](#) » globe 50108 WiFi Smart Security Camera Instructions 

## Contents

- [1 globe 50108 WiFi Smart Security Camera](#)
- [2 SMART Wi-Fi CAMERA](#)
- [3 FEATURES](#)
- [4 SPECIFICATIONS](#)
- [5 TOOLS REQUIRED](#)
- [6 PRODUCT INFORMATION](#)
- [7 MOUNTING INSTRUCTIONS – INDOORS](#)
- [8 MOUNTING INSTRUCTIONS – OUTDOORS](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)



## globe 50108 WiFi Smart Security Camera

globe-50108-WiFi-Smart-Security-Camera

Thank you for selecting Globe as your smart security choice for your home. With proper care, this product will provide years of pleasure and enjoyment. Carefully follow the instructions in order to ensure that this product functions safely and properly for years to come.

## SMART Wi-Fi CAMERA

Check out the installation video on our website: [globe-electric.com/smart](http://globe-electric.com/smart)





FEATURES

LED Indicator light	Red Light (Solid): Camera’s network is unstable  Red Light (Flashing rapidly): Camera is in pairing mode Blue Light (Solid): Camera is connected  Blue Light (Flashing rapidly): Camera is connecting to network
SD Card	Supports micro SD Card storage (Max.128G)
Microphone	Audio in
Speaker	Audio out
Reset	Press and hold the reset button down for 5 seconds with the pin provided. Once you hear a n audible click sound, it means your camera has been set to factory settings, and is now ready to be paired.


SPECIFICATIONS

Motion detection: up to 5m (26.25ft)	Data security: AES 128
IR distance: 10m (32.8ft)	Power adapter cord length: 1.5m (4.921ft)
Bit rate: 32Kps-2Mbps	Camera wire length: 5m (16.4ft)
Audio: 2-way audio	Total wire length : 6.5m (21.4ft)
Operating Temperature: -20°C- 55°C	Power output: DC 12V, 1A
Wi-Fi standard: IEEE802.11 b/g/n	Power consumption: 4.5W Max
Frequency: 2.4 GHz-2.4835 GHz	Protection: IP65 (Camera only)
Wi-Fi security: WPA-PSK/WPA2-PSK	

## TOOLS REQUIRED

 <p>Philips head screw driver or Power Drill with Philips head</p>	 <p>3/32" bit for pilot hole (5/8") drill bit for cable hole (7/32") drill bit for indoor wall anchors</p>
 <p>Silicone sealant to seal camera's base</p>	 <p>mounting accessories (included)</p>

## PRODUCT INFORMATION

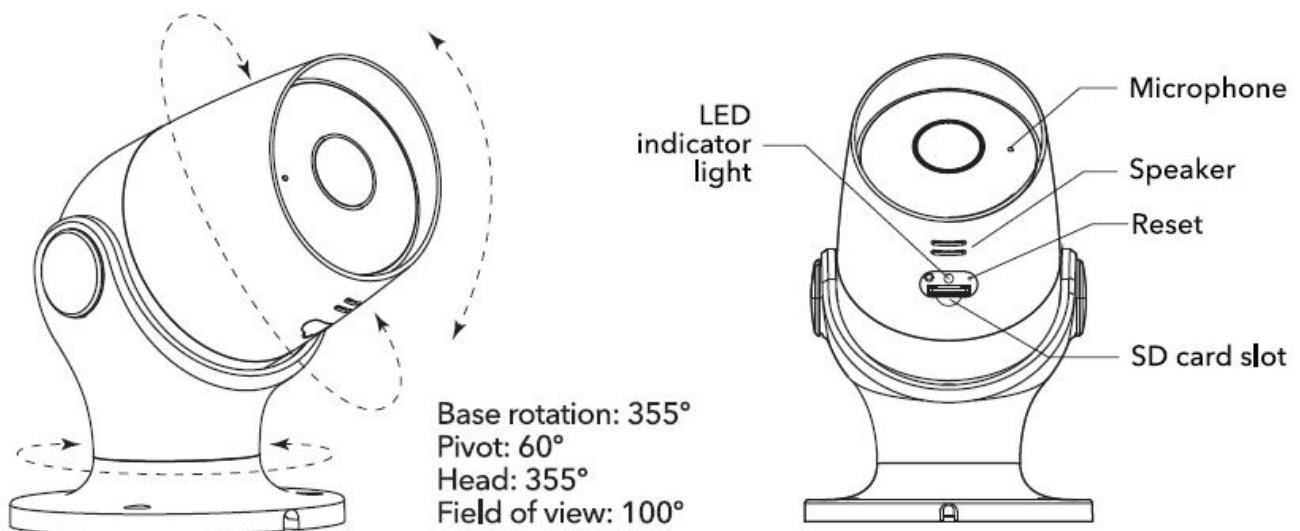


## MOUNTING INSTRUCTIONS – INDOORS

### 1. CONNECT DEVICE

Power the camera on and connect to the Globe Suite™ App.

\*Please see quick start guide on how to pair with the Globe Suite™ App.

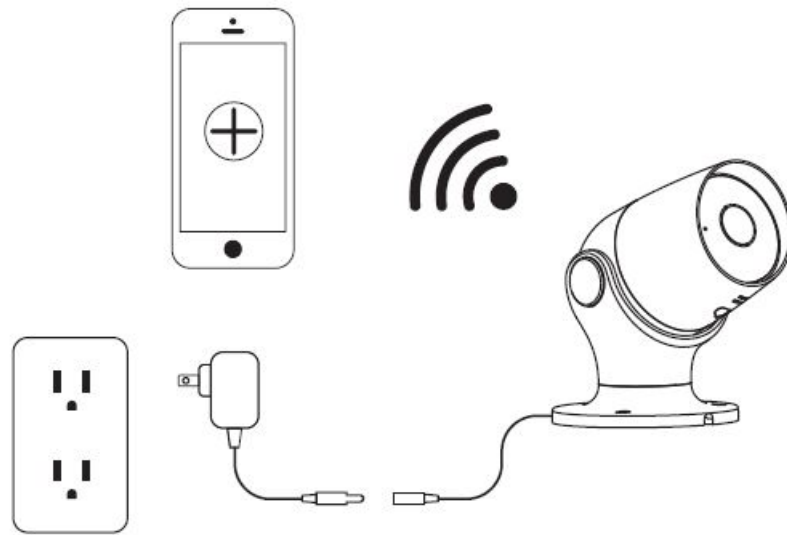

## 2. ENSURE CONNECTIVITY


Before mounting the camera, ensure the camera can connect to the Wi-Fi. Test by plugging into the desired location and check to ensure it's streaming video on the Globe Suite™ App. If you do not see a video stream, the Wi-Fi is not strong enough, and you will need to find a different spot.

\*Sometimes moving a few inches can help\*



## 3. PLANNING THE CABLE PATH


Before mounting the camera, please measure the cable along the route where you will be installing it. The length of the power adapter is 1.5m (4.92 ft.) and the camera wire length is 5m (16.40 ft.).

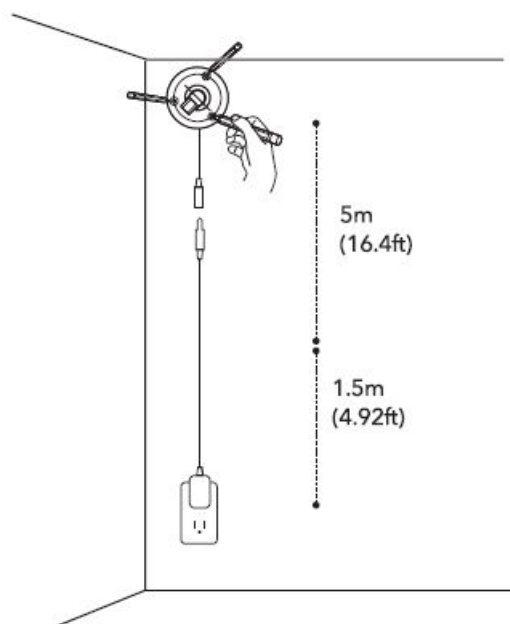

#### 4. MOUNTING YOUR CAMERA

Use a Philips head screw driver or Power Drill with a Philips head to drill in the screws (provided).


If the wall is made of a soft material (dry wall), you may need to use the included wall anchors to hold the screws. Use a 7/32" bit for the anchors.

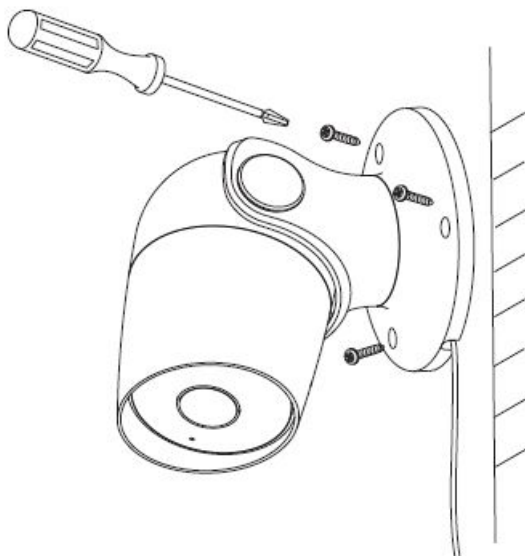

### MOUNTING INSTRUCTIONS – OUTDOORS

#### 1. CONNECT INDOORS

Power the camera inside to ensure everything is connected before taking it outside.

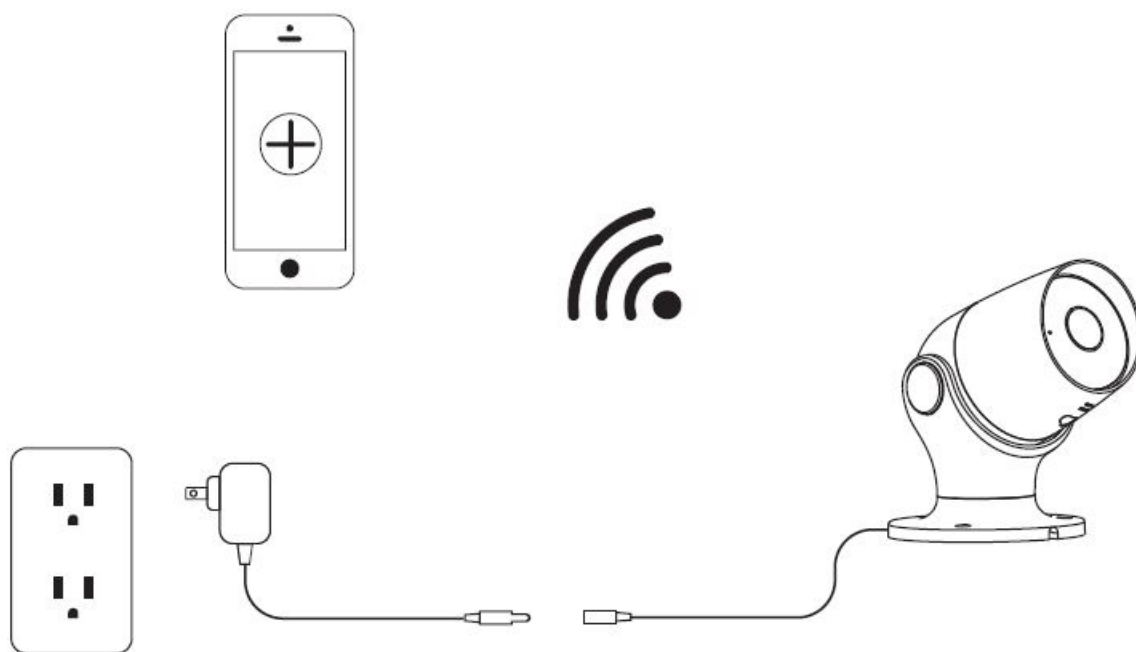

#### 2. ENSURE CONNECTIVITY

Before mounting the camera outside, ensure the camera can connect to the Wi-Fi. Test by plugging into the desired location and check to ensure it's streaming video on the Globe Suite TM App.

If you do not see a video stream, the Wi-Fi is not strong enough, and you will need to find a different spot.

\*Sometimes moving a few inches can help\*




### 3. PLANNING THE CABLE PATH

Before mounting the camera, please measure the cable along the route where you will be installing it.


The length of the power adapter is 1.5m (4.92 ft.) and the camera wire length is 0.43m (1.41 ft.).

1. Use a pencil to mark where you will be drilling.
2. Use a 3/32" drill bit to drill pilot holes in the desired location. \*Ensure there are no pipes or wires in the mounting location\*

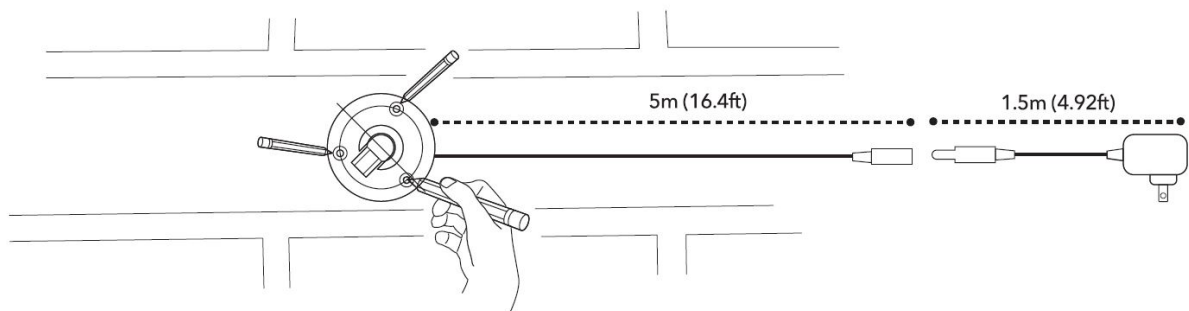

### 4. POWER YOUR CAMERA (ADAPTER) FROM INDOORS

- Drill an opening using a 5/8" bit for the cable to run through.
- Insert your cable through the hole, connect the camera to its power adapter and plug into the outlet.
- Spread silicone sealant around the edge of the camera base before installing to seal it
- Use a power drill with a Philips head to drill in the screws (provided).
- If needed, use outdoor rated wall anchors (not included) to secure the camera.

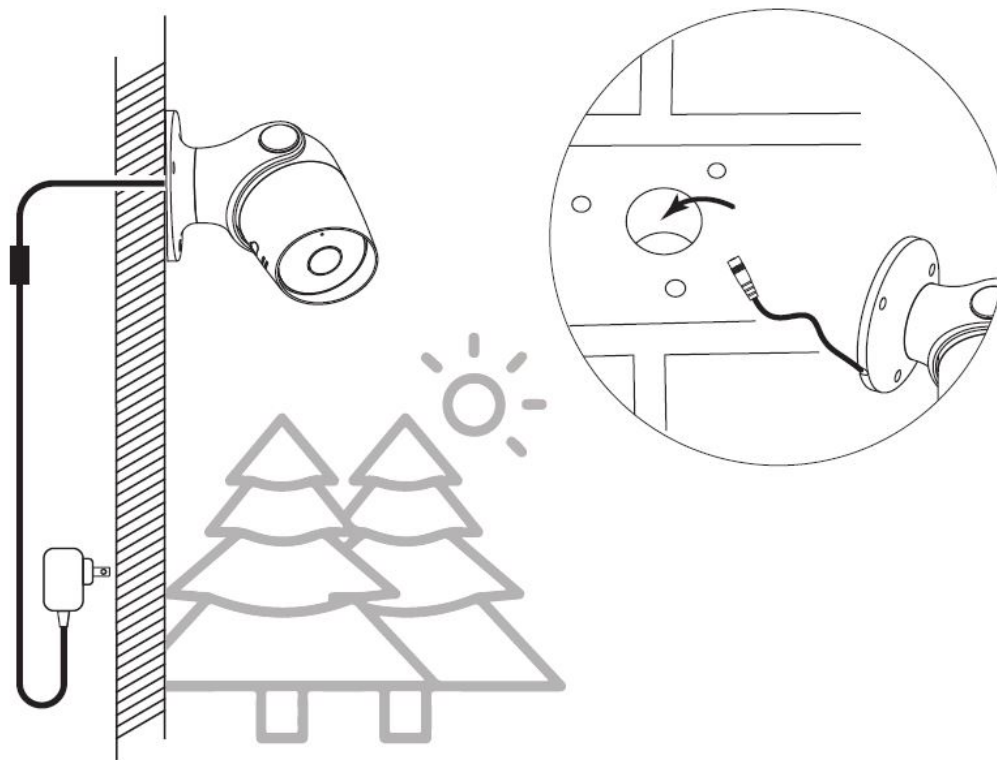

Since 1932, Globe has taken pride in offering products of the highest quality, and a level of service unparalleled in the industry. Should you encounter any difficulties, have any questions or simply wish to offer us your valuable feedback, you may contact us in the following ways:

- Toll Free **Telephone:** 1-888-543-1388 (North America Only) / **Toll Free Fax:** 1-800-668-4562 (North America Only)
- E-Mail: [info@globe-electric.com](mailto:info@globe-electric.com) / Mail: Globe Electric Customer Service Department
- 150 Oneida, Montreal, Quebec, Canada H9R 1A8
- Please visit our website to discover other quality Globe products: <http://www.globe-electric.com>

## Documents / Resources

	<p><a href="#">globe 50108 WiFi Smart Security Camera</a> [pdf] Instructions  GE50108A, 2AQUQGE50108A, 50108 WiFi Smart Security Camera, 50108, WiFi Smart Security Camera</p>
--	--