



# GlocalMe GLMU20A01 TD-LTE Wireless Data Terminal User Manual

[Home](#) » [GlocalMe](#) » GlocalMe GLMU20A01 TD-LTE Wireless Data Terminal User Manual 




GLMU20A01 User Manual

Copyright © 2020 uCloudlink All Rights Reserved

## Contents


- [1 Product Overview](#)
- [2 Function Introduction](#)
- [3 Function Introduction](#)
- [4 Quick Start Guide](#)
- [5 Warning](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

## Product Overview

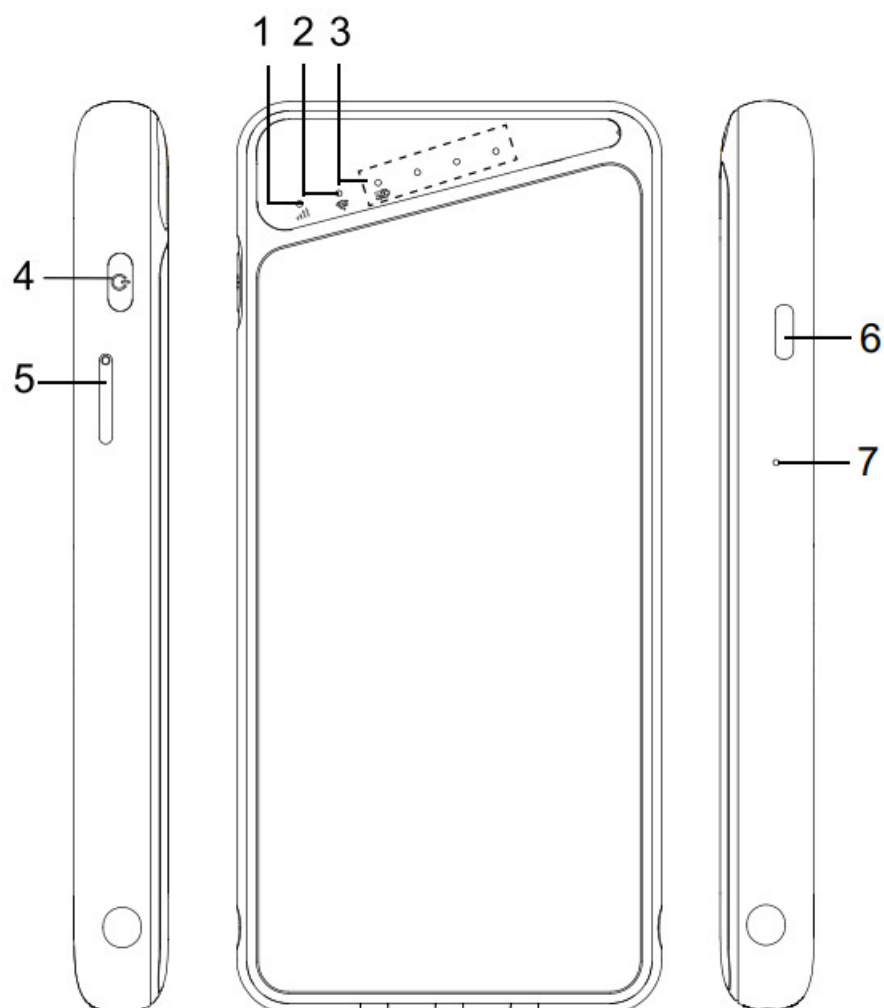

1. Signal LED Indicator
2. Wi-Fi LED Indicator
3. Battery LED Indicator
4. Power button

5. SIM Slot
6. Type-C(Input)
7. Reset button

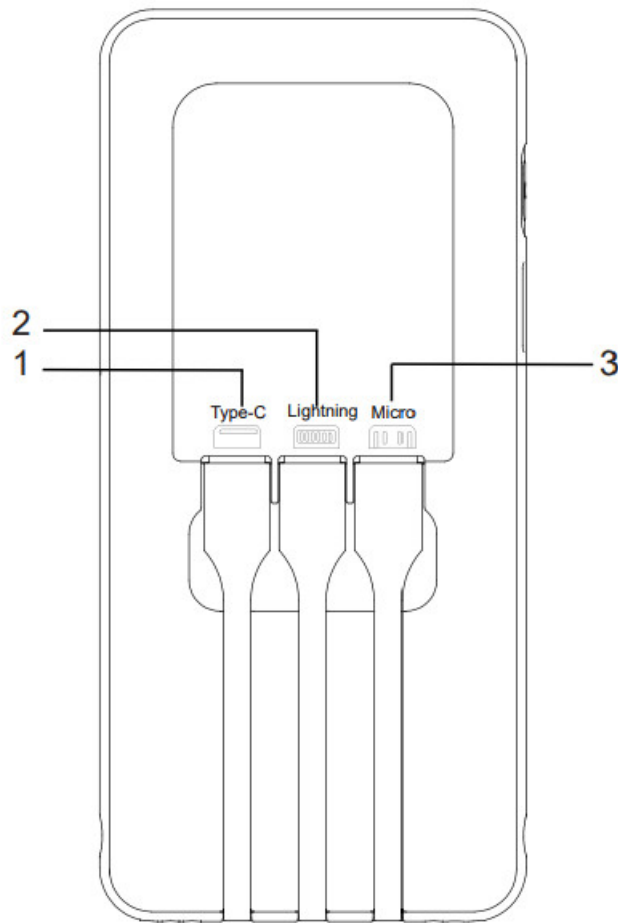

1. Type-C charging
2. Lightning charging
3. Micro charging


## Function Introduction

1. Power on Press the power button for 3 seconds.
2. Power off: Press the power button for 5 seconds.
3. Reset: Press the power button for 14 seconds.
4. Restore factory settings press the reset button for 5 seconds.
5. Battery capacity and signal strength: Press the power button, the battery capacity will be shown in the first 3 seconds, then the signal strength will be shown afterward.

LED Indicator Type	Status	Remarks
Wi-Fi LED	On	Ready for Internet connection
	Off	No Internet connection
	Flashing	Service connecting
4G LED	RED	The signal is bad
	Yellow	The signal is normal
	Green	The signal is Good
	Red flashing	Connecting error
Battery	On	The battery capacity is shown by the strength LED i ndicator
	Flashing	Charging

## Local SIM

1. Local SIM is supported by GLMU20A01, Only insert Nano-SIM card (small card).
2. Use a needle to pull out the SIM cards as shown in the picture below. Please contact customer service if any issue is encountered
3. GLMU20A01 device does not support SIM cards with PIN codes, if you want to use this type of SIM card, please unlock the PIN code first.
4. GLMU20A01 device does not support SIM cards with PIN codes, if you want to use this type of SIM card, please unlock the PIN code first.



## Function Introduction



Brand: GlocalMe

Model No.: GLMU20A01

Box content: Device, User manual, Type-C cable, SIM removal too


Technical Specification:

- Size: 143\*69\*16mm
- LTE FDD: B1/2/3/4/5/7/8/9/12/13/ 18/19/20/26/28/66
- LTE TDD: B34/38/39/40/41(194M)
- WCDMA: B1/2/5/6/8/9/19
- GSM: 850/900/1800/1900

- Max upload speed: 50Mbps
- Max download speed: 150Mbps
- Wi-Fi: IEEE802. 11b/g/n
- USB port: Type-C (input)
- Battery Capacity: 7000mAh
- Power Input: DC  5V
- Power output lighting: 2A  5V 2A (TYPE-C, Micro-USB)

**Note:**  
 Listed wireless data transfer rates are the theoretical maximum. The actual data transfer rate may vary depending on the network environment and carrier’s coverage.

**Quick Start Guide**

1. Register an AccountScan the QR code below to download the GlocalMe App. You can register for an account after installation.
2. Activate Device: Use the GlocalMe app to scan the QR code on the back panel of the device.
3. Purchase Package: Purchase package or top-up through the GlocalMe app.
4. Power On Press the power button for 3 seconds.
5. Connect to GlocalMe: When the Wi-Fi LED indicator ”  ” is staying on, turn on Wi-Fi on your cell phone, select GlocalMe Wi-Fi, enter the password to connect to the internet. (Wi-Fi name and password can be seen on the back panel. as shown below)
6. Device Management: Enter “192.168.43.1” in the address bar of the web browser, and enter the username and password to log in. (The initial username and password are admin/admin).
7. Use the device to charge the mobile phone and other devices: insert the charging head directly into the mobile phone and other devices, and press the power key once to activate the discharge. (if the device is idle for 5 minutes without external equipment, it will start to hibernate, press the power key to activate).

	
<a href="http://www.glocalme.com/index/index/downloadPage">http://www.glocalme.com/index/index/downloadPage</a>	<a href="https://www.glocalme.com/CN/zh-CN/download/downloadPage?imei=869680022932833&amp;pwd=66296839&amp;type=E1">https://www.glocalme.com/CN/zh-CN/download/downloadPage?imei=869680022932833&amp;pwd=66296839&amp;type=E1</a>

**Warning**

Specific Absorption Rate (SAR) refers to the rate at which the body absorbs RF energy. The SAR limit is 1.6 watts

per kilogram in countries that set the limit averaged over 1 gram of tissue and 2.0 watts per kilogram in countries that set the limit averaged over 10 grams of tissue. During testing, the device is set to their highest transmission levels in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value.

#### **EU Regulatory conformance**

The device complies with RF specifications and when used with an accessory that contains no metal and that positions the device a minimum of 0.5 cm from the body. The SAR limit adopted is 2.0W/kg averaged over 10 grams of tissue. The highest SAR value reported for the device when properly worn on the body complies with the limit.

#### **FCC Regulatory conformance**

For body-worn operation, the device complies with FCC RF exposure guidelines and when used with an accessory that contains no metal and that positions the device a minimum of 1.0 cm from the body. The SAR limit adopted by the FCC is 1.6W/kg averaged over 1 gram of tissue. The highest SAR value reported for the device when properly worn on the body complies with the limit.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause. Undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and complies with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur during installation. If the device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is suggested to try to correct the interference by the following measures:

- Reorient or relocate the receiving antenna.
- Increase the distance between the equipment and the receiver
- Connect the equipment to an outlet on a different circuit to the receiver
- Consult the manufacturer or an experienced radio/TV technician for help.



Information on the disposal and recycling of the devices. This symbol (with or without a solid bar) on the device, batteries (if included), and/or the packaging, indicates that the device and its electrical accessories (for example, a headset, adapter, or cable) and batteries should not be disposed of as household garbage. These items should not be disposed of as unsorted municipal waste and should be taken to a certified collection point for recycling or proper disposal. For detailed information about device or battery recycling, contact your local city office, household waste disposal service, or retail store. Disposal of the device and batteries (if included) is subject to WEEE. Directive recast (Directive 2012/19/EU) and battery directive (Directive 2006/66/ec). The purpose of separating WEEE and batteries from other waste is to minimize the potential environmental impacts and human health risks of any hazardous substances that may be present.





<https://www.facebook.com/GlocalMe/>

<http://weixin.qq.com/r/HUwUDE3E6BCXrQlv9xkP>

Hong Kong uCloudlink Network Technology Limited

E-mail: [service@ucloudlink.com](mailto:service@ucloudlink.com)

Hotline: +852 8191 2660 or +86 400 699 1314 China

Facebook: GlocalMe Instagram: @GlocalMeMoments

Twitter: @GlocalMeMoments

YouTube: GlocalMe

Address: SUITE 603, 6/F, LAWS COMMERCIAL PLAZA, 788 CHEUNG SHA WAN ROAD, KOWLOON, HONG KONG



This product and related system are protected by one or more of uCloudlink's patents, details please refer to

<https://www.ucloudlink.com/patents>

Ver 1.0 Copyright © 2020 uCloudlink All Rights Reserved

## Documents / Resources

	<a href="#">GlocalMe GLMU20A01 TD-LTE Wireless Data Terminal</a> [pdf] User Manual GLMU20A01, TD-LTE Wireless Data Terminal
--	--