




Godox C5R LED Panel RGBWW Light Instruction Manual

[Home](#) » [Godox](#) » Godox C5R LED Panel RGBWW Light Instruction Manual 



**C5R LED Panel RGBWW Light
Instruction Manual**

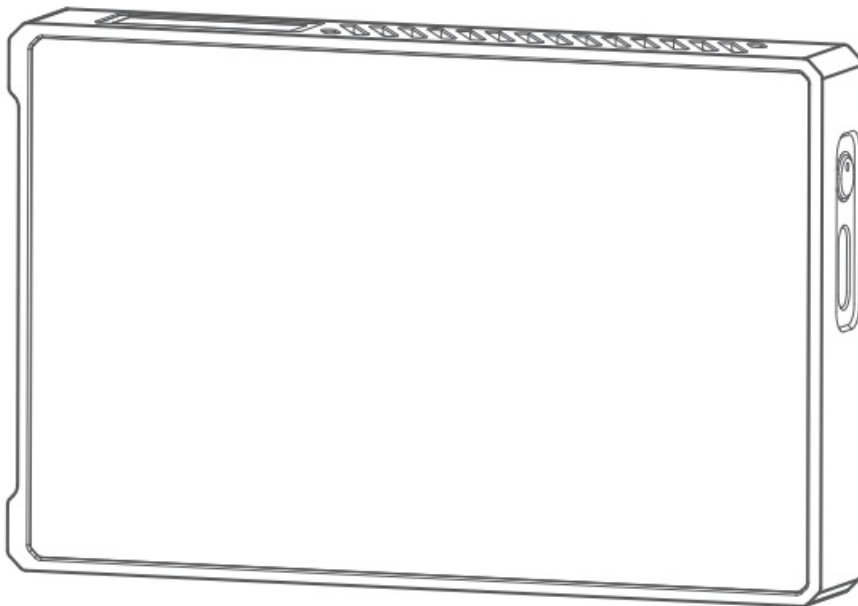

Contents

- [1 Safety Instructions and Attentions](#)
- [2 Foreword](#)
- [3 Main Features](#)
- [4 Name of Parts](#)
- [5 Included Items](#)
- [6 Charging](#)
- [7 Operation Instruction](#)
- [8 Technical Data](#)
- [9 Maintenance](#)
- [10 Warranty](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)

Safety Instructions and Attentions

First of all, as the most basic principle: This product is a professional lighting set equipment and should be used by professional lighting engineers or under the guidance of professionals. Basic safety attentions must always be followed during use, as follows:

1. Before use, please read and understand these instructions and attentions .
2. Professional lighting is prohibited for children. When children are near, parents or accompanying persons must supervise closely to prevent children from personal injury due to collision with lamps or private use of lamps.
3. This lighting product is not ordinary lighting product and cannot be used for general lighting. Anyone who has suffered eye damage or has sensitive eyes should avoid using this product.
4. When the lamp is on, it must be used with care. Do not touch high-temperature parts, such as LED lamp beads, to avoid burns.
5. When the lamp is on, it is forbidden to look directly at the lamp beads under any circumstances. Strong light should be used under the guidance of professional lighting engineers. Avoid prolonged exposure to strong light under any circumstances. If eye discomfort, please turn off the lamp in time, suspend use, and see a doctor immediately.
6. If the lamp bead is damaged or deformed by heat, stop using this equipment, and contact the manufacturer, service agent or qualified maintenance personnel to replace the lamp bead in time to avoid accidents.
7. This product is only suitable for use in -10°C to 40°C operating environment and normal humidity environment.
8. Do not use damaged equipment or accessories, and wait for professional maintenance personnel to check and repair to confirm being normal before use.
9. During using, if the casing of this product is broken due to being dropped, squeezed or subjected to strong impact, please do not use it, so as to avoid electric shock injury due to contact with internal electronic components.
10. If an extension cord is required, please use an extension cord with a current rating greater than or equal to that of the equipment. If an extension cord is rated less than the equipment, overheating may result.
11. Some products have long power cords, please place the power cords properly and keep them in a safe place. Avoid contacting the power cord with overheating surfaces, avoid improper placement that could cause pulling damage, or trip on-site personnel. Please use the certified power cord from the original manufacturer. If the product is damaged by using a non-certified power cord, it will not be repaired by our factory.
12. Be sure to unplug equipment from the power outlet before cleaning and repairing. When not in use, do not pull

the power cord to unplug the

equipment. For normal power-off, please hold both ends of the plug of the equipment with your hands and pull the plug out of power outlet.

This equipment needs to be connected to a grounded outlet.

13. This equipment is not waterproof, please keep it dry and do not immerse it in water or other liquids. The equipment should be installed in a dry and ventilated place, and avoid using it in rainy, humid, dusty or overheated environments. Do not place any objects on the lamp or let liquid flow into the lamp to avoid accidents.
14. Do not disassemble the product without permission. If the product fails, it must be checked and repaired by authorized maintenance personnel.
15. Before storing, make sure that the equipment has cooled down completely. For storage, unplug the power cord from the equipment.
16. The equipment should be placed in the carrying case or in a ventilated dry place.
17. Do not place equipment near flammable and volatile solvents such as alcohol and gasoline.
18. Do not use accessories that are not recommended by our factory to avoid fire, electric shock or personal injury.
19. When cleaning, do not wipe it with a damp cloth, please use a dry cloth or a soft cloth to wipe the dirt of the equipment.

Please take off the protective cover before using.

20. This product complies with ROHS, CE and FCC certification, please refer to the relevant national standards for use and operation.
21. The safety instructions are formulated according to the strict testing of the factory, and the design and specifications of the equipment are subject to change without prior notice. For latest product information, please check the GODOX website and view latest electronic instruction.
22. Some products have built-in lithium batteries. Please use specified chargers, and use them within a proper range of the specified voltage and temperature according to the correct operating instructions.
Some products are battery powered. Do not use any batteries, power sources or accessories not specified in the instructions for such products. Keep batteries and other accessories out of the reach of children and infants. In the instance that a child or infant swallows a battery or accessory, immediate emergency medical attention required. If the battery leaks, becomes discolored, deformed, emits smoke, or emits an abnormal odor, remove it immediately. Be careful during removal to avoid burns.
23. Continued use could result in fire, electric shock, or burns. Do not use any deformed or modified batteries.
24. Do not disassemble or modify this product or battery. Do not heat or solder the battery. Keep the battery away from fire or water. Do not incorrectly insert the positive and negative ends of batteries, or mix old and new batteries or batteries of different types together.
25. One-year warranty period, accessories such as consumable batteries, adapters, power cords, etc. are not covered by this warranty.
If it is found that the equipment is repaired without authorization, the one-year warranty period will be cancelled and relevant fees will be charged for maintenance.
26. Machine failures caused by non-standard operation are not covered by the warranty.

Foreword

Thank you for purchasing!

Known RGB Creative Light C5R is featured with: highlight LED beads, wide CCT range, stepless adjustable

brightness, bi-color temperature mode, HSI mode, FX mode, compact and portable, etc. Bluetooth APP wireless control enables remote control of C5R by mobile device. It supports USB Type-C charging and wireless charging (compatible with most wireless chargers), C5R is quite suitable for light filling, background light creating, painting shooting, etc.


Main Features

- Support USB Type-C charging/wireless charging, and wireless charging for other mobile devices
- Compact and portable, lightweight of only 169g
- Built-in CCT/HSI/FX mode, up to 36000 colors with CRI 96+
- Magnetic design on the back, mountable to metal surface
- Cold and warm color temperature, precisely adjustable from 2500K to 8500K
- 39 simulated light effects to create various scenes
- 3000mAh built-in lithium battery works continuously for 2 hours in 100% brightness
- Bluetooth APP control, simple and convenient operation
- CRI296, TLCI296, restore the original color

Warning

- Keep out of reach of children.
- Do not disassemble. Should repairs become necessary, this product must be sent to an authorized maintenance center.
- Do not use the flash unit in the presence of flammable gases, chemicals and other similar materials. In certain circumstance, please pay attention to the relevant warnings.
- Built-in lithium battery, do not disassemble, impact, squeeze or put it into fire. If serious bulge occurs, please do not use.
- Do not leave or store the product if the ambient temperature reads over 40C.
- Please use the proper charger and follow the operation instruction.

Name of Parts

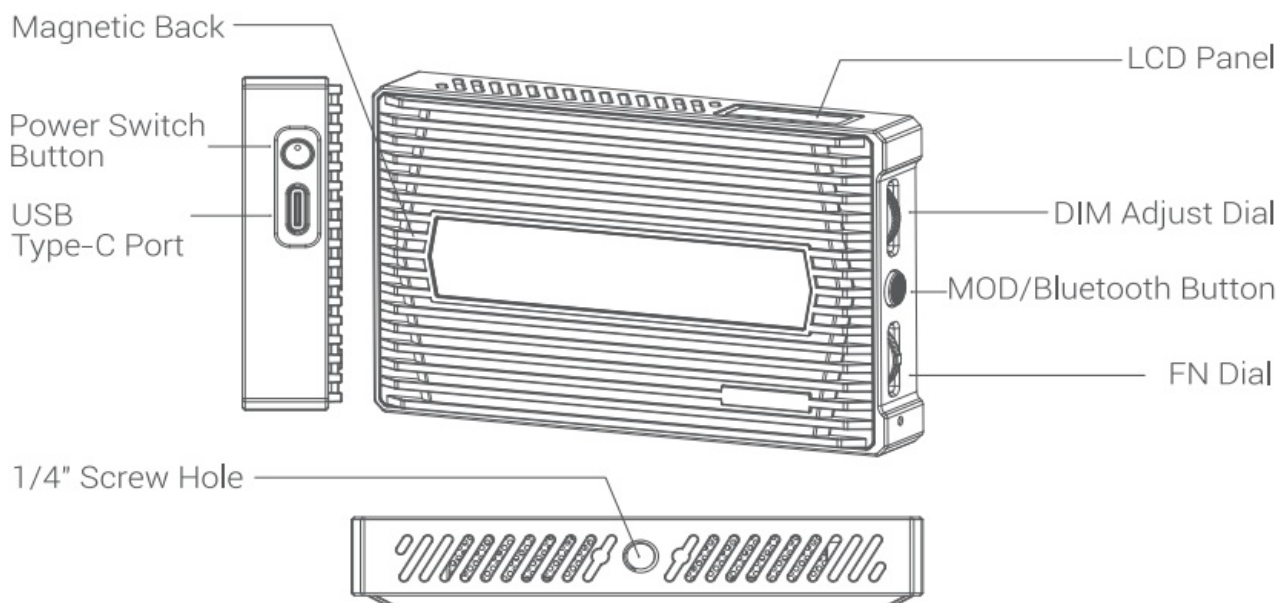

Included Items



Light Body *1



Collapsible Diffuser *1



USB Type-C Charging Cable *1



Coldshoe Base *1



Carry Bag CB50 *1



Instruction Manual *1


Battery

1. Built-in lithium battery is not detachable and has long run time
2. It is reliably safe. The inner circuit is against overcharge, over-discharge, over current, and short circuit.
3. It takes only 2.5 hours to fully charge the battery by using the standard 5V/2A battery charger (optional).

Charging

Type-C Charging

When charging in power on status, the battery indicator increases with flash, while charging in power off status, the LCD panel will only display the battery indicator which increases with flash. The battery indicator will be filled after fully charged

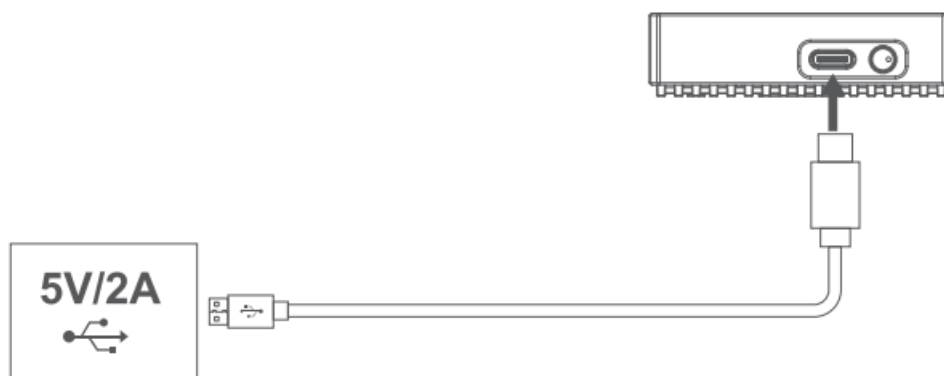

Wireless Charging

With a built-in wireless charging module, this product can be wirelessly charged by placing the back on the wireless charging board.

Tip: Please properly place with the wireless charging area on the back in order to improve charging efficiency.

Operation Instruction

1. Power Switch

Long press the power switch button for 2 second to turn on or off the device.

2. Brightness Adjustment

Turn the DIM adjust dial to adjust brightness from 0% to 100%. Turn it downwards “-” to decrease the brightness while upwards “+” to increase the brightness, with 1% of increment.

3. Mode Switch: CCT/HSI/FX Mode

Short press MOD/Bluetooth button to switch among the following modes

When the LCD panel displays “CCT”, it's bi-color temperature mode.



When the LCD panel display HSI mode



When the LCD panel displays FX it's FX mode.



3.1 CCT Mode

Switch to bi-color temperature mode, turn the FN dial to adjust the color temperature from 2500K to 8500K. Slide up to increase while slide down to decrease with 100K increment of the color temperature value each slide. Press and push the FN dial upwards can increase CCT to 8500K quickly, while press and push downwards can decrease CCT to 2500K quickly.

3.2 HSI Mode

Switch to HSI mode, short press the FN dial to select Hue (H) or Saturation(S).

Select the hue H, turn the FN dial to adjust the hue value from 0° to 360°. Slide up to increase while slide down to decrease with 1° increment of the hue value each slide. Select the saturation (S), turn the FN dial to adjust the saturation value from 0 to 100. Slide up to increase while slide down to decrease with 1 increment of the saturation value each slide.














Note: Press and push the FN dial upwards or downwards can achieve quick adjustment.

3.3 FX Mode

Switch to FX mode, turn the FN dial to adjust light effect, slide up or down to switch at normal speed, press and push upwards or downwards to switch at fast speed

Users can choose among the following of 39 light effects in FX mode:

FX Light Effects Form (39 kinds within 14 types)

NO.	Display	Scenes	Display I	Display II	Display III
1		RGB Recycle	Slow speed	Medium speed	Quick speed
2		Flash	Flash	Press conference	Paparazzi
3		Laser	Birthday Party	KTV	Disco
4		Lightning	Discontinuous	Frequent	Sustainable
5		Broken Bulb	Discontinuous	Frequent	Sustainable
6		TV	Slow speed	Medium speed	Quick speed
7		Candle	Discontinuous	Frequent	Sustainable
8		Fire	Firewood	Campfire	Fire Hazard
9		Firework	Short	Continuous	Performance
10		Police Car	Storm	Stroboflash	Quick flash
11		Fire Truck	Storm	Stroboflash	Quick flash
12		Ambulance	Storm	Stroboflash	Quick flash
13		Music	Mode 1	Mode 2	
14	SOS	SOS			

Bluetooth mode

Long press the MOD/Bluetooth button for 1 second to enter Bluetooth mode.

Turn the FN dial to choose Bluetooth switch (ON/OFF) or Bluetooth reset (RESET), then short press the FN dial to turn on, turn off or reset the Bluetooth. Scan the following QR code to download "GodoxLight" mobile APP (both Android and IOS systems are available). When "Reset" displays on the LCD panel, the Bluetooth is being reset.



http://www.guteleben.com/html/dl_app/c_ble/GodoxLight/index.html

For specific operations, please refer to the "Help" manual of the mobile APP, which contains detailed instructions.

Note: the APP can be used directly on the firstly installed device (smartphone or tablet). When changing to other mobile devices, the light shall be reset before normal usage of APP.

Technical Data

Model	C5R
Lithium Battery	3.8V/3000mAh
Power	5W
USB Charging Input	5V 2A
Wireless Charging Input	5V 1A
CCT Range	2500K-8500K
CRIz	96
TLCIz	97
Illuminance Data in CCT 6500K	2000lux/180fc (0.98 feet/0.3m)
	760lux/70fc (1.64feet/0.5m)
	200lux/18fc (3.28 feet/lm)
Brightness Range	0%-100%
Wireless Charging Time=	3.5 hours
USB Charging Timex	2.5 hours
Battery Life (100% Brightness)	2 hours
Controlling Method	Bluetooth APP
Working Environment	Temperature: -10 C-40 C
Dimension	106.68.18mm
	4.2 .2.7 .0.7 inches
Net weight z	169g
	5.96oz

Maintenance

This product, except consumables e.g. cable and coldshoe, is supported with a one-year warranty. Maintenance of the product must be performed by our authorized maintenance department which can provide original accessories.

Unauthorized service will void the warranty.

Changes made to the specifications or designs may not be reflected in this manual

Declaration of Conformity :

GODOX Photo Equipment Co,Ltd. hereby declares that the This equipment are in compliance with the essential requirements and other relevant provisions of EU Directive 2014/53/EU. They are allowed to be used in all EU member states.

For information of DoC, Please click this web link:

http://www.godox.com/DOC/Godox_C5R_DOC.pdf.

FCC statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the

user's authority to operate the equipment. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction

Warranty

Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe- keep it. Thank you!

Information	
Model	
Contact Number	
Customer	
Information	
Name	
Address	
Seller	
Information	
Name	
Contact Number	
Address	
Date of Sale	
Note:	

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.


The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day(purchase date) when the product is bought for the first time, And the purchase date is considered as the date registered on the warranty card when buying the

product.

Godox After-sale Service Call 0755-29609320-8062
GODOX Photo Equipment Co.,Ltd.
Add.: Building 2, Yaochuan Industrial Zone, Tangwei Community,
Fuhai Street,Bao'an District, Shenzhen518103,China
Tel: +86-755-29609320(8062)
Fax: +86-755-25723423 Email: godox@godox.com



Documents / Resources

	<p>Godox C5R LED Panel RGBWW Light [pdf] Instruction Manual C5R LED Panel RGBWW Light, C5R, LED Panel RGBWW Light, Panel RGBWW Light, RGBW W Light, Light</p>
---	---

[Manuals+](#).