


QUICKSTART GUIDE


This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

CONNECTING TO Wi-Fi


From the System Status Icons

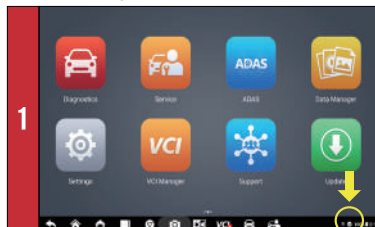


- Tap on the lower-right corner of the screen.
- The Quick Settings menu will appear.

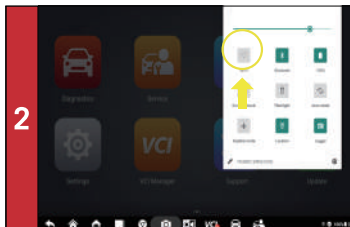

- A larger menu with additional options, including Wi-Fi, will appear.
- Long press the **Wi-Fi** icon to adjust the Wi-Fi settings.

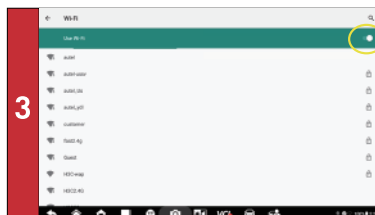


- Make sure **Wi-Fi** is turned on.
- Select your local network and enter the password.

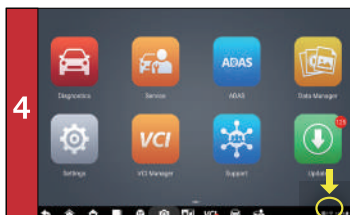


- The Wi-Fi icon will appear when connection is established.


From the Android Screen

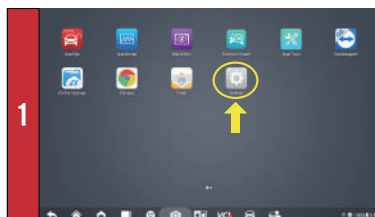


- From the Android screen, select **Settings**.

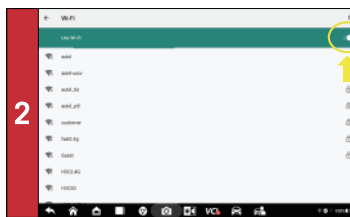

- Make sure **Wi-Fi** is turned on.
- Select your local network.

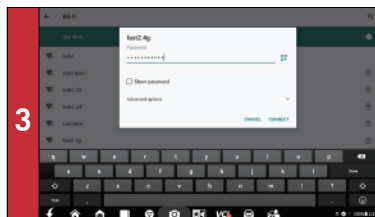

- Enter your network password to connect the Wi-Fi.

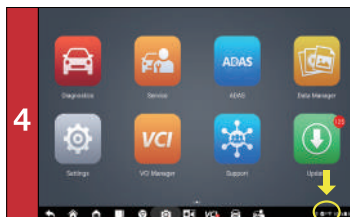


- Ensure you are connected to Wi-Fi: The Wi-Fi icon will appear in the lower-right corner.

QUICKSTART GUIDE


This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

TOOL REGISTRATION VIA PC




- 1

 - Visit <https://pro.autel.com>.
 - Click **Register** to create your Autel ID.
 - If you already have an Autel ID, log in and skip to Step 5.




- 2

 - Enter your personal information. Fields marked with an asterisk (*) are mandatory.




- 3

 - Enter your email address, then click **Request**.
 - You will receive an email from Autel with your verification code. Open the email and copy the code into the proper input box.
 - Set a password for your account, and enter the password again to confirm.
 - Read the **Autel User Service Agreement** and **Autel Privacy Policy**, then check the box to accept the terms.
 - After all the information is entered, click **Register**.



- 4

 - Once your account is successfully registered, you will be redirected to the Product Registration screen. If not, click the button on the screen.



- 5

 - Your product serial number and password are required to complete your registration. To find your serial number and password on the tablet: go to **Settings > About**.



- 6

 - Enter your tablet serial number and password.
 - Enter the CAPTCHA code as shown.
 - Click **Submit** to complete your product registration.

QUICKSTART GUIDE

This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

TOOL REGISTRATION VIA TABLET




- 1

 - Tap **Autel User Center** on the Job Menu.
 - If you do not have an Autel account, tap **Register** on the Log-in screen.
 - The Register screen will appear.
 - If you already have an Autel ID, log in and skip to step 3.



- 2

 - Enter your personal information. Fields marked with an asterisk (*) are required.
 - Input the verification code sent to your email address, then set and confirm your password.
 - Read the **Autel User Service Agreement** and **Autel Privacy Policy**, then check the box to accept the terms.
 - After all the information is entered, tap **Register**.



- 3

 - Once your account is successfully registered, you will enter the main menu of the Autel User Center.
 - Select **Device Management** on the main menu.
 - The Device Management screen will appear.




- 4

 - Tap the **Link Device** button on the upper-right corner of the Device Management screen.
 - The serial number and password of the device will automatically appear on the Link Device screen.
 - Tap the **Link** button to complete the product registration.


DOWNLOAD SOFTWARE UPDATES

Software updates are available for **FREE** for the first year from date of purchase. Your tool must be registered as per the directions on Page 1 to download software updates.



- 1

 - Connect your tablet to Wi-Fi and plug it into a power source.



- 2

 - Select the **Update** button to view a list of available updates.
 - Tap the **Get** or **Update All** button to start downloading according to your needs.

QUICKSTART GUIDE

EXTEND INITIAL YEAR OF COVERAGE WITH

1 YEAR-TCP

TOTAL CARE PROGRAM

PURCHASE TO EXTEND TABLET
WARRANTY & SOFTWARE
SUBSCRIPTION COVERAGE FOR ONE YEAR

DON'T WAIT FOR INITIAL YEAR EXPIRATION

PURCHASE & ACTIVATE A NEW TCP SUBSCRIPTION BEFORE UPDATES EXPIRE TO LIMIT DOWNTIME AND ENSURE CONTINUED VEHICLE COVERAGE

NEWSAME DAY ORDER & ACTIVATION
GET YOUR SUBSCRIPTION FASTER
RECEIVE ACTIVATION CODES VIA EMAIL
ASK YOUR LOCAL TOOL DEALER



register your tablet at
pro.autel.com & purchase tcp

use activation code on card or
digital code provided in email

redeem code to activate
subscription & warranty




YouTube
TRAINING VIDEOS
@AutelTools




View More Autel Videos at: <https://www.youtube.com/auteltools>

PRINTING INSTALLATION & SETUP


Works with any printer with a Wi-Fi connection. No need for special software or driver on the tablet.

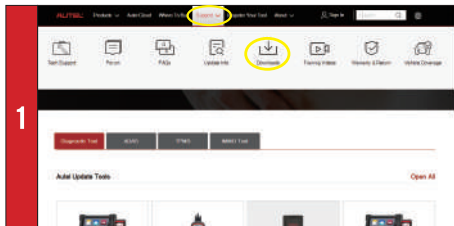


- Make sure your Windows PC and tablet are on the same Wi-Fi network.
- On your computer, go to www.autel.com, select **Support > Downloads > Autel Update Tools**.

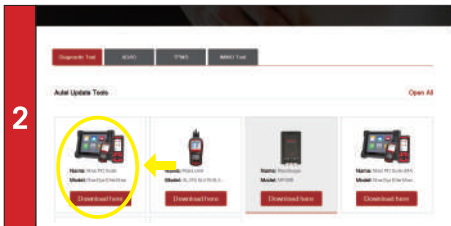

- Locate the **Maxi PC Suite** software and click on the **Download Here** button.
- Open the .zip file.

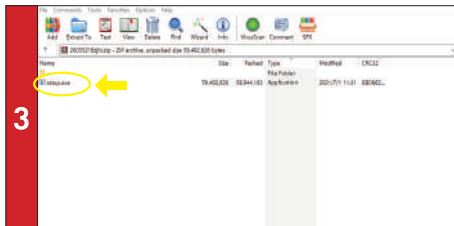

- Double click the **setup.exe** to install the program.

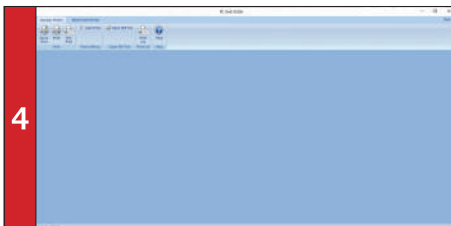


- Run **PC Link** on the computer. This was installed along with the installation of the **Maxi PC Suite** software.
- Select **MaxiSys Printer**. Tap **Quick Print** or **Print** to start printing.


QUICKSTART GUIDE

This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.


VCI CONNECTION VIA BLUETOOTH




- 1 Select the **VCI Manager** application icon from the Main Menu or from the bottom toolbar.



- 2 Choose **VCI BT** from the left side of the screen.
- Your tablet will automatically start scanning for available VCI devices. Found devices are listed on the right side of the screen.



- When a connection is established, the status of the connected device will read, "Connected."




- When the VCI device is ready for use, a green badge will appear on the VCI button at the bottom of the screen.


VCI SOFTWARE UPDATES




- 1 Connect the VCI device to the tablet via USB cable.
- Connect the VCI to a power source to ensure updates are installed correctly.



- 2 Select the **VCI Manager** application from the Main Menu.



- 3 Select **VCI Update** from the Connection Mode list on the left side of the screen.



- The current and latest version of the VCI software will appear.
• If available, tap the **Update Now** button to download software.

QUICKSTART GUIDE

This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

VID — VEHICLE IDENTIFICATION DETECTION | SCAN VIN




- Select **Diagnostics** from the Main Menu.



- Select the blue **VID** button on the top left of the screen.
- Select **Scan VIN/License** from the drop-down menu.




- Position the camera so that the VIN (located on the vehicle dash or vehicle door jamb) appears within the scanning frame.



"Scan by Barcode" option
"Scan by VIN" option
"Scan by License" Option

- The VIN is scanned and recognized automatically.
The result will appear in the Recognition result dialog box.
- Tap **OK** to confirm the VIN and continue.

VID — VEHICLE IDENTIFICATION DETECTION AUTO VIN DETECT (COMPATIBLE WITH VEHICLES 2007 AND NEWER)




- Select **Diagnostics** from the Main Menu.



- Select the blue **VID** button on the top left of the screen.



- Select **Auto Detect** from the drop-down menu.




- Once the vehicle is successfully identified, the Diagnostics Menu will appear.

QUICKSTART GUIDE

This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.


AUTO-SCAN




- Select **Diagnostics** from the Main Menu.



- Select the vehicle manufacturer.




- Select **Automatic Selection** to acquire VIN automatically. Tap **Manual input** to type in the VIN.




- All available systems will appear.

FAULT SCAN




- Select **Diagnostics** from the Main Menu.



- A System List of all available systems will appear after the Auto Scan.

- Tap **Fault scan** at the bottom of the screen to scan system faults.




- Diagnostic Trouble Codes (DTCs) can be viewed directly after scanning.
- Fault # #: Indicates faults are present; "#" indicates the number of detected faults.
- Pass / No Fault: Indicates the system was scanned and no fault was detected.
- No Response: Indicates the system was unresponsive.

QUICKSTART GUIDE


This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

PRE/POST SCAN REPORTS


Prior to running pre/post scans, we recommend you take the following steps to customize your reports.

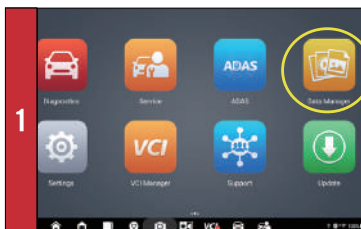


- 1 Select the **Data Manager** icon on the Main Menu.

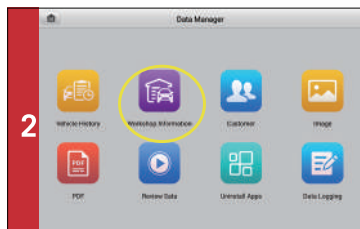

- 2 Tap the **Workshop Information** icon.

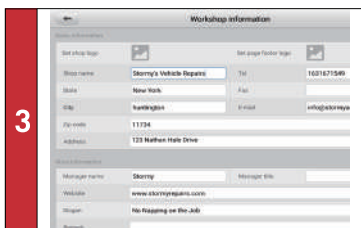


- 3 Complete the fields on this screen by tapping on each field and entering information. The information entered here will appear on every Pre- and Post-Scan report generated.

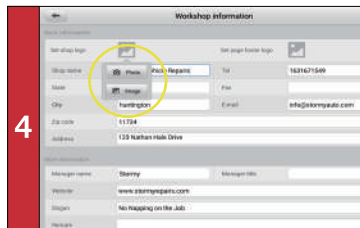


- 4 To add a logo: Tap the image icon and select from the drop-down menu to either take a photo with the tablet or upload an image from the tablet.




The generated Pre- and Post-Scan reports are now complete with shop information and ready to be emailed to an insurance company or printed for the customer.

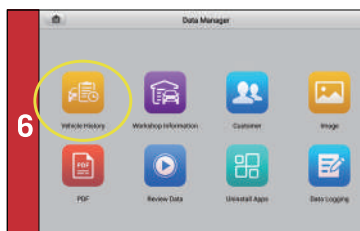

- 5 Reports are stored in Vehicle History, accessible through Data Manager or through **Diagnostics > History**.

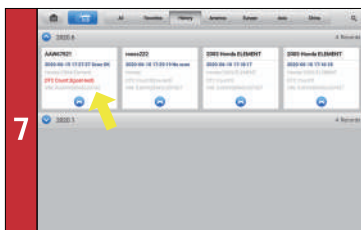

- 6 Access stored reports.

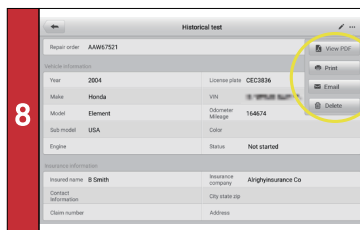


- 7 Open the drop-down menu by tapping the overflow icon on the upper-right corner of the screen. Choose **View PDF**, **Print**, **E-mail**, or **Delete**.

QUICKSTART GUIDE

This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.

SYSTEM SUITE APPS

SERVICE

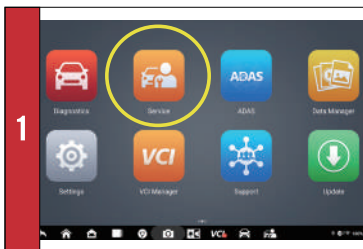


SERVICE

Designed to provide quick access to the vehicle systems for various service and maintenance tasks.

Comprehensive service functions, including Oil Reset, EPB, SAS, DPF, TPMS, and BMS.

DATA LOGGING

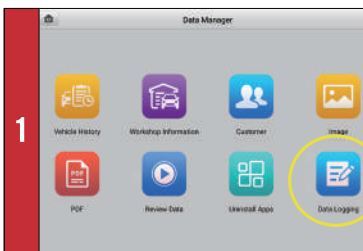

DATA LOGGING



Interactive recording sessions save vehicle testing data and enable direct contact with Autel technical support staff for first-hand troubleshooting of diagnostic bugs and errors.

QUICKSTART GUIDE

This quickstart guide applies to the MaxiSys® MS908S II, MS908S Pro II, MS906 Pro, MS906 Pro-TS, MS906 Pro2-TS, MS909EV, MS909, MS919, MS908S3 and MaxiCOM® MK908 II, MK908 Pro II, MK906 Pro, MK906 Pro-TS, MK906 Pro2-TS, MK906S PRO, MK906S PRO-TS and MK906S PRO2-TS. Ensure your Wi-Fi network is accessible and has a stable connection.



SYSTEM SUITE APPS

REMOTE DESKTOP

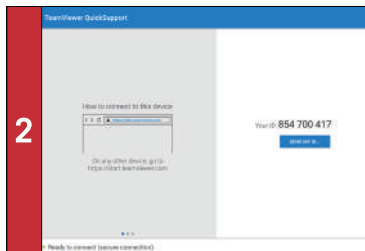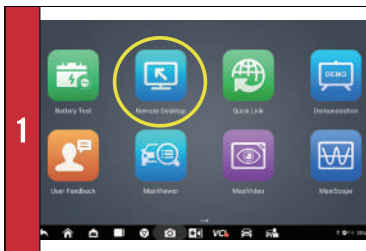

Enables you to authorize our tech-support specialists to remotely log into the tablet to help you update software on the tablet and VCI, and perform difficult diagnostic procedures or complicated vehicle services. This real-time support provides quick and accurate solutions.

DATA MANAGER

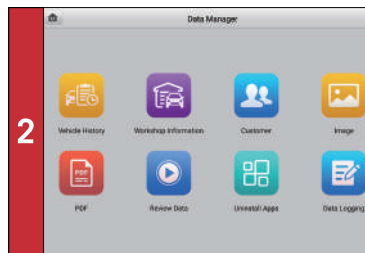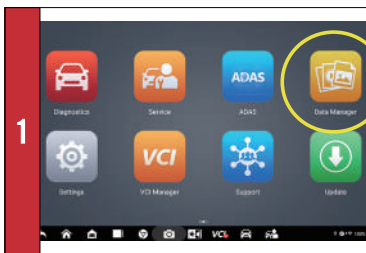

Designed to store all data files, including customer information, vehicle ID, and vehicle diagnostic records.