




HANYOUNG NUX HSR-2D-2A Single Phase Solid State Relay Instruction Manual

[Home](#) » [HANYOUNG NUX](#) » HANYOUNG NUX HSR-2D-2A Single Phase Solid State Relay Instruction Manual 



NUX HSR-2D-2A Single Phase Solid State Relay Instruction Manual

Contents

- [1 HSR-2D-2A Single Phase Solid State Relay](#)
- [2 Safety information](#)
- [3 Suffix code](#)
- [4 Specifications](#)
- [5 Dimensions](#)
- [6 HEAT SINK](#)
- [7 Application circuits](#)
- [8 AC input type \(10 A ~ 40 A\)Equivalent circuits](#)
- [9 Load Current Characteristics](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)

HSR-2D-2A Single Phase Solid State Relay



**Single-Phase Solid State Relay
HSR-2D/2A
INSTRUCTION MANUAL**

Thank you for purchasing Han young Nix products. Please read the instruction manual carefully before using this product, and use the product correctly. Also, please keep this instruction manual where you can view it any time.

Safety information

Please read the safety information carefully before the use, and use the product correctly.

The alerts declared in the manual are classified into Danger, Warning and Caution according to their importance

⚠ DANGER Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury

⚠ WARNING Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury

⚠ CAUTION Indicates a potentially hazardous situation which, if not avoided, may result in minor injury or property damage

⚠ DANGER

The input/output terminals are subject to electric shock risk. Never let the input/output terminals come in contact with your body or conductive substances.

⚠ WARNING

- When used in equipment with a high risk of personal injury or property damage (examples: medical devices, nuclear control, ships, aircrafts, vehicles, railways, combustion devices, safety devices, crime/disaster prevention equipment etc.) install double safety devices and prevent accidents. Failure to do so may result in fire, personnel accident or property damage.
- Please read the safety information carefully before the use, and use the product correctly.
- If there is a possibility that a malfunction or abnormality of this product may lead to a serious accident, install an appropriate protection circuit on the outside and plan to prevent accidents.
- Please supply the rated power voltage, in order to prevent product breakdowns or malfunctions.

- To prevent electric shocks and malfunctions, do not supply power until the wiring is completed.
- Please disassemble the product after turning OFF the power.
- Any use of the product other than those specified by the manufacturer may result in personal injury or property damage.
- Please use this product after installing it to a panel, because there is a risk of electric shock.

CAUTION

- Please make sure that the product specifications are the same as you ordered.
- Please use the product in places where corrosive gases (especially harmful gases, ammonia, etc.) and flammable gases are not generated.
- Please use the product in places without liquids, oils, chemicals, steam, dust, salt, iron, etc. (pollution degree 1 or 2).
- Please avoid places where large inductive interference, static electricity, magnetic noise are generated.
- Please avoid places with heat accumulation caused by direct sunlight, radiant heat, etc.
- When water enters, short circuit or fire may occur, so please inspect the product carefully.
- Do not connect anything to the unused terminals.
- For DC types, please wire correctly, after checking the polarity of the terminals.
- When using the SSR, the product may be damaged if the specified heat sink is not used. Be sure to use the specified heat sink.
- When disposing of the product, treat it as industrial waste.


Suffix code

Model	Code						Content
HSR	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Single-Phase Solid State Relay
Control phase	2						Single-phase
Input control voltage	D						4 – 32 VDC
	A						90 – 264 VAC
Rated load current	10						10 A
	20						20 A
	30						30 A
	40						40 A
	50						50 A
70				70 A			
Rated load voltage	2						90 – 264 VAC
	4						90 – 480 VAC
Operation method (switching mode)					Z		Zero cross switching
					R		Random switching
Heat sink					–		Without heat sink
					-T		With heat sink (only for 50A, 70A)

Specifications

■ DC input type (low voltage)


Classification		HSR-2D10 2Z	HSR-2D20 2Z	HSR-2D30 2Z	HSR-2D40 2Z	HSR-2D50 2Z	HSR-2D70 2Z
		HSR-2D10 2R	HSR-2D20 2R	HSR-2D30 2R	HSR-2D40 2R	HSR-2D50 2R	HSR-2D70 2R
	Power voltage Operating	5 – 24 VDC					
	voltage range Impedance	4 – 32 VDC Max. 4					

Input	Operating voltage	Min. 3 VDC					
	Reset voltage	Max. 1.5 VDC					
	Input current	Constant current method: 10 (±3)					
	Rated load voltage	100 – 240 VAC					
Output	Rated load voltage	90 – 264 VAC					
	Load voltage range	90 – 480 VAC					
	Peak voltage (non-repetition)	800 V	1200 V	1200 V	1200 V	1200 V	1200 V
	Rated load current	10 A	20 A	30 A	40A	50A	70A
	Frequency	50/60					
	Surge current	170A	250 A	350 A	370 A	580 A	580 A
	Leakage current	Max. 20	Max. 20	Max. 20	Max. 20	Max. 20	Max. 20
	ON state voltage drop	1.3 V	1.6 V	1.8 V	1.8 V	1.8 V	1.8 V
	Min. operating current	1 A	1 A	1 A	1 A	0.5 A	0.5 A
	Response speed	Zero cross switching	1/2 cycle +1 max.				
Random switching		Max. 1 ms					
Insulation resistance		500 VDC, 100 (input/output and among cases)					
Dielectric strength		2500 VAC (60 for one minute)					
Vibration resistance		10 – 55 , double amplitude: 1.5 , Each X· Y· Z axis for 2 hours					
Shock resistance		1000 (about 100 G), Each X· Y· Z axis for 3 times					
Storage temperature		-30 ~ 90 °C					
Ambient temperature & humidity		-20 ~ 80 °C, 45 ~ 85 % R.H.					
Approval							
Weight (g)		150					

※ Weight when packed

DC input type (high voltage)


Classification		HSR-2D10 4R	HSR-2D20 4R	HSR-2D30 4R	HSR-2D40 4R	HSR-2D50 4R	HSR-2D70 4R
		HSR-2D10 4R	HSR-2D20 4R	HSR-2D30 4R	HSR-2D40 4R	HSR-2D50 4R	HSR-2D70 4R
Input	Power voltage Operating	5 – 24 VDC					
	voltage range	4 – 32 VDC					
	Impedance	Max. 4					
	Operating voltage	Min. 3 VDC					
	Reset voltage	Max. 1.4 VDC					
	Input current	Constant current method: 10 (±3)					
Output	Rated load voltage	100 – 440 VAC					
	Load voltage range Peak voltage	90 – 480 VAC					
	(non-repetition)	800 V	1200 V	1200 V	1200 V	1200 V	1200 V
	Rated load current	10 A	20 A	30 A	40 A	50 A	70 A
	Frequency	50/60					
	Surge current	170 A	250 A	350 A	370 A	580 A	580 A
	Leakage current	Max. 20	Max. 20	Max. 20	Max. 20	Max. 20	Max. 20
	ON state voltage drop	1.3 V	1.6 V	1.8 V	1.8 V	1.8 V	1.8 V
	Min. operating current	1 A	1 A	1 A	1 A	0.5 A	0.5 A
Responce	Zero cross switching	1/2 cycle + 1 max.					
	Random switching	Max. 1 ms					
Insulation resistance		500 VDC, 100 (input/output and among cases)					
Dielectric strength		2500 VAC (60 for one minute)					
Vibration resistance		10 – 55 , double amplitude: 1.5 , Each X· Y· Z axis for 2 hours					
Shock resistance		1000 (about 100 G), Each X· Y· Z axis for 3 times					
Storage temperature		-30 ~ 90 °C					
Ambient temperature & humidity		-20 ~ 80 °C, 45 ~ 85 % R.H.					

Approval		—
Weight (g)	150	

※ Weight when packed

■ AC input type (low voltage)

Classification		HSR-2A10 2Z	HSR-2A20 2R	HSR-2A30 2R	HSR-2A40 2R	HSR-2A50 2R	HSR-2A70 2R
		HSR-2A10 2R	HSR-2A20 2R	HSR-2A30 2R	HSR-2A40 2R	HSR-2A50 2R	HSR-2A70 2R
Input	Power voltage Operating	100 – 240 VAC					
	voltage range	90 – 264 VAC					
	Impedance	Max. 40					
	Operating voltage	Min. 72 VAC	Min. 72 VAC	Min. 72 VAC	Min. 72 VAC	Min. 75 VAC	Min. 75 VAC
	Reset voltage	Max. 40 VAC					
	Input current	240 VAC / 9 (±4)					
Output	Rated load voltage	100 – 240 VAC					
	Load voltage range	90 – 264 VAC					
	Peak voltage (non-repetition)	600 V	600 V	600 V	600 V	800 V	800 V
	Rated load current	10 A	20 A	30 A	40 A	50 A	70 A
	Frequency	50/60					
	Surge current	170 A	250 A	350 A	370 A	580 A	580 A
	Leakage current	15	15	15	15	Max. 20	Max. 20
	ON state voltage drop	1.3 V	1.6 V	1.8 V	1.8 V	1.8 V	1.8 V
	Min. operating current	1 A	1 A	1 A	1 A	0.5 A	0.5 A
	Response speed	Zero cross switching					
		1/2 cycle +1 max.					
Insulation resistance	Random switching	Max. 1 ms					
Insulation resistance		500 VDC, 100 (input/output and among cases)					


Dielectric strength	2500 VAC (60 for one minute)	
Vibration resistance	10 – 55 , double amplitude: 1.5 , Each X· Y· Z axis for 2 hours	
Shock resistance	1000 (about 100 G), Each X· Y· Z axis for 3 times	
Operating temperature	-30 ~ 90 °C	
Ambient temperature & humidity	-20 ~ 80 °C, 45 ~ 85 % R.H.	
Approval		
Weight (g)	150	

■ AC input type (high voltage)

Classification		HSR-2A10 4Z	HSR-2A20 4Z	HSR-2A30 4Z	HSR-2A40 4Z	HSR-2A50 4Z	HSR-2A70 4Z
		HSR-2A10 4R	HSR-2A20 4R	HSR-2A30 4R	HSR-2A40 4R	HSR-2A50 4R	HSR-2A70 4R
Input	Power voltage	100 – 240 VAC					
	Operating voltage range	90 – 264 VAC					
	Impedance	Max. 4					
	Operating voltage	Min. 80 VAC	Min. 80 VAC	Min. 80 VAC	Min. 80 VAC	Min. 75 VAC	Min. 75 VAC
	Reset voltage	Max. 40 VAC					
	Input current	240 VAC / 9 (±4)					
Output	Rated load voltage	100 – 440 VAC					
	Load voltage range	90 – 480 VAC					
	Peak voltage (non-repetition)	800 V	1200 V	1200 V	1200 V	1200 V	1200 V
	Rated load current	10 A	20 A	30 A	40 A	50 A	70 A
	Frequency Surge current	170 A	250 A	350 A	50/60 370 A	580 A	580 A
	Leakage current	Max. 20	Max. 20	Max. 20	Max. 20	Max. 20	Max. 20
	ON state voltage drop	1.3 V	1.6 V	1.8 V	1.8 V	1.8 V	1.8 V

	Min. operating current	1 A	1 A	1 A	1 A	0.5 A	0.5 A
Respppe oendse	Zero cross switching	1/2 cycle + 1 max.					
	Random switching	Max. 1 ms					
Insulation resistance		500 VDC, 100 (input/output and among cases)					
Dielectric strength		2500 VAC (60 for one minute)					
Vibration resistance		10 – 55 , double amplitude: 1.5 , Each X· Y· Z axis for 2 hours					
Shock resistance		1000 (about 100 G), Each X· Y· Z axis for 3 times					
Storage temperature		-30 ~ 90 °C					
Ambient temperature & humidity		-20 ~ 80 °C, 45 ~ 85 % R.H.					
Approval		CE					
Weight (g)		150					



Dimensions

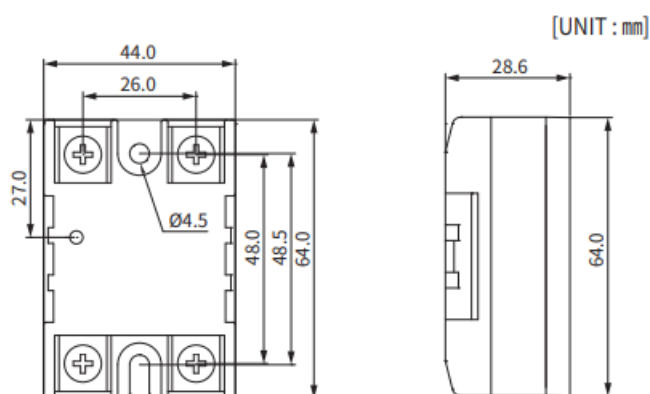

HEAT SINK


■ Model name: HSP series

● 10 A

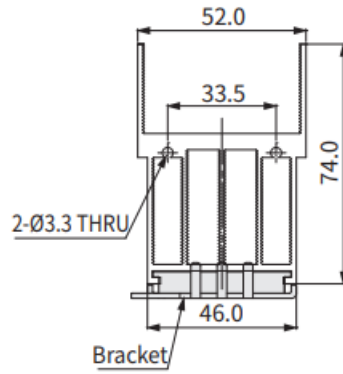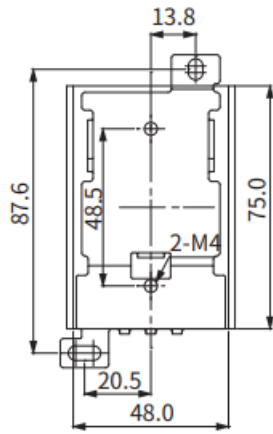



● Panel cutout (10 ~ 40 A)

[UNIT : mm]

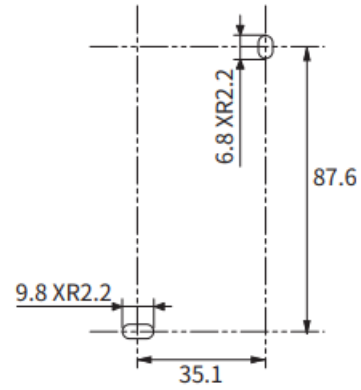

Model	Applicable Model	Capacity(A)	Weight
HSP-10	HSR-2E110EID	10 A	208 g


● 20 A, 30 A, 40 A

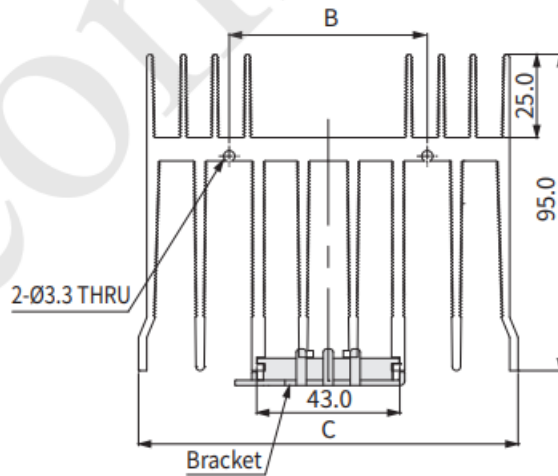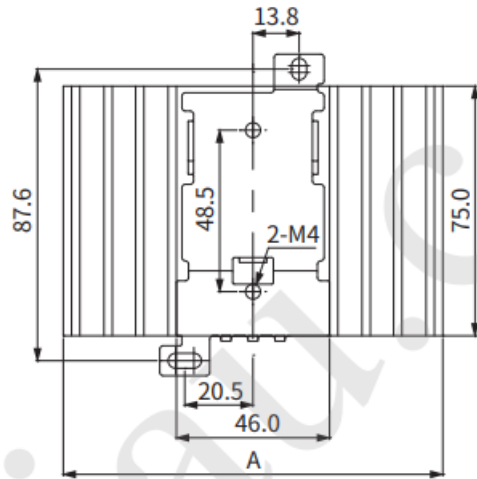


[UNIT : mm]

Model	Applicable Model	Capacity(A)	A	B	C	Weight
HSP-20	HSR-2120□□	20 A	85.0	60.	85.0	404 g
HSP-40	HSR-20300□	30 A	114.0	60.	114.0	570 g
	HSR-2□40□40	A				

Model name: HSM series

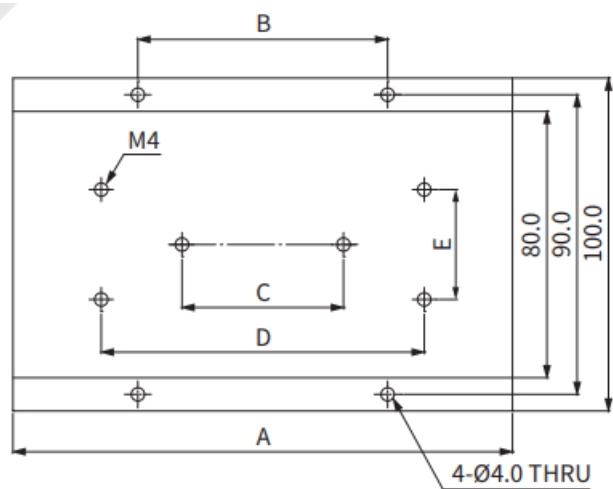


[UNIT : mm]

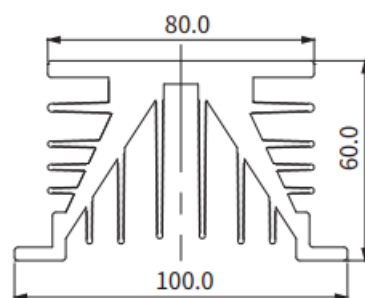


Model	Applicable Model	Capacity(A)	A		BCD		E	Weight
HSM-70	HSR-2010□□	10 A	70.0	35.0	49.	—	—	364 g
I-ISM 110	HSR-2 M 20E10	20A	110.0	55.0	49.	—	—	568g
	HSR-2□30□□	30 A						
HSM-150	HSR-274000	40A	150.0	75.0	49.	97.0	32.0	768g


Model name: HSN80-F series

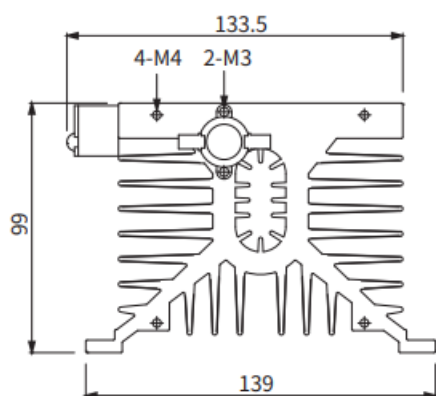


[UNIT : mm]

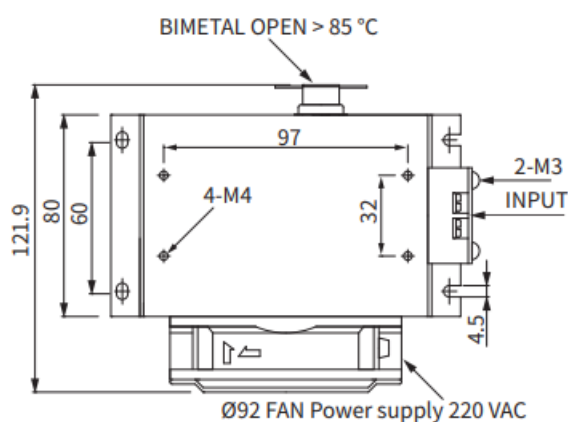

Model name: HSN120-F series

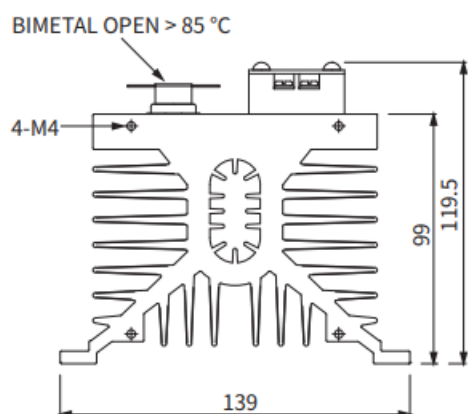

[UNIT : mm]

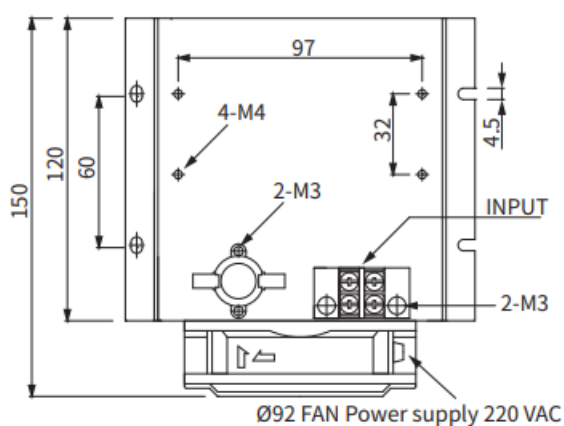


Model	Applicable Model	Capacity(A)	Weight
HSN80-F	HSR-2050□□	50A	1,474g
HSN120-F	HSR-2770□□	70A	2,052g


The above contents are subject to change without prior notice for performance improvement.

Application circuits

AC input type (10 A ~ 40 A)

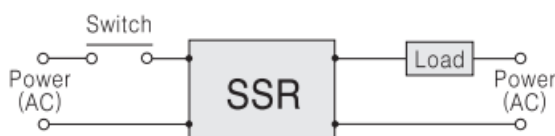


■ DC input type (10 A ~ 70 A)

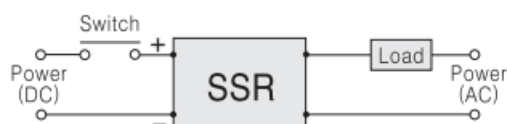


Equivalent circuits


■ DC input type (10 A ~ 40 A)

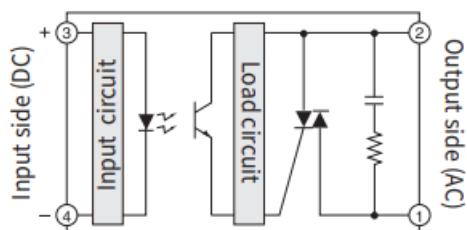


■ AC input type (10 A ~ 40 A)

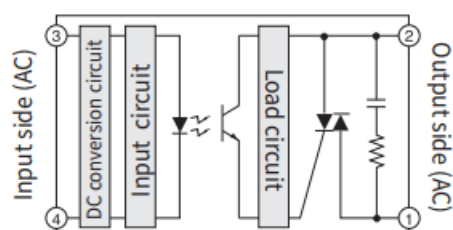

■ DC input type (50 A ~ 70 A)

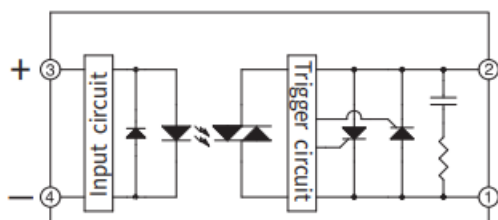


■ AC input type (50 A ~ 70 A)

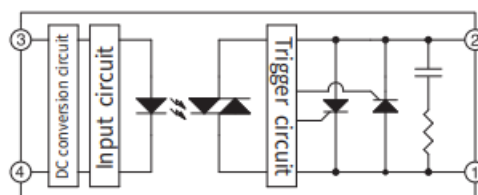


Load Current Characteristics

■ Input Voltage / Current Characteristics

● HSR-2D (single-phase DC)

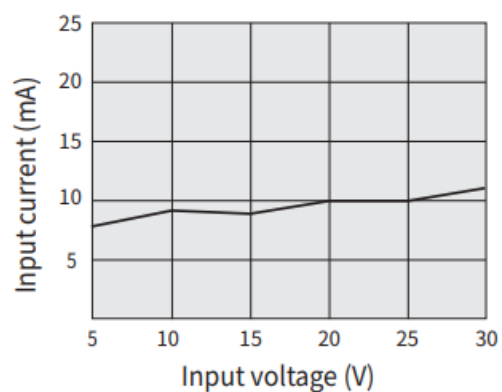


● HSR-2A (single-phase AC)

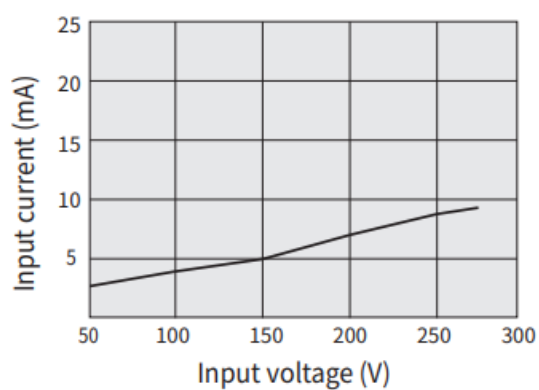


■ Load Current Characteristics


● 10 A, 20 A

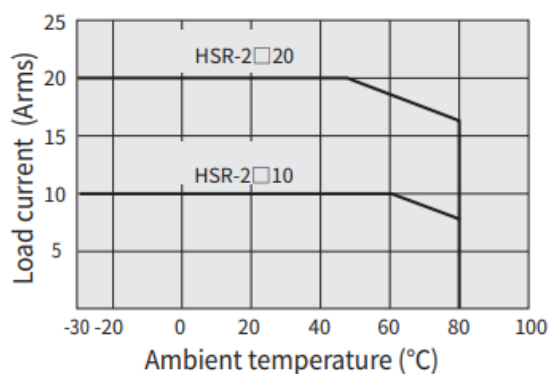

● 30 A, 40 A

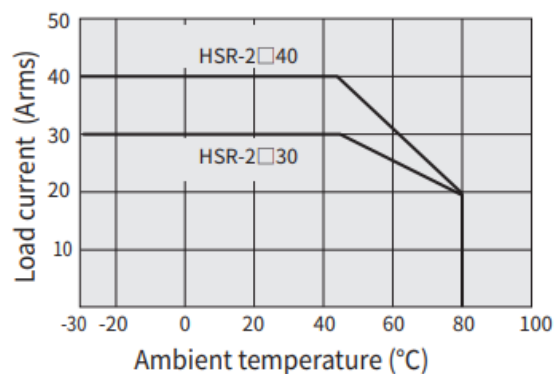


● 50 A, 70 A

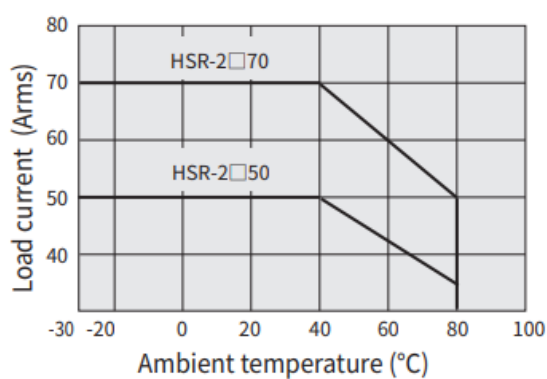


■ Surge Current Characteristics


● 10 A, 20 A, 30 A, 40 A

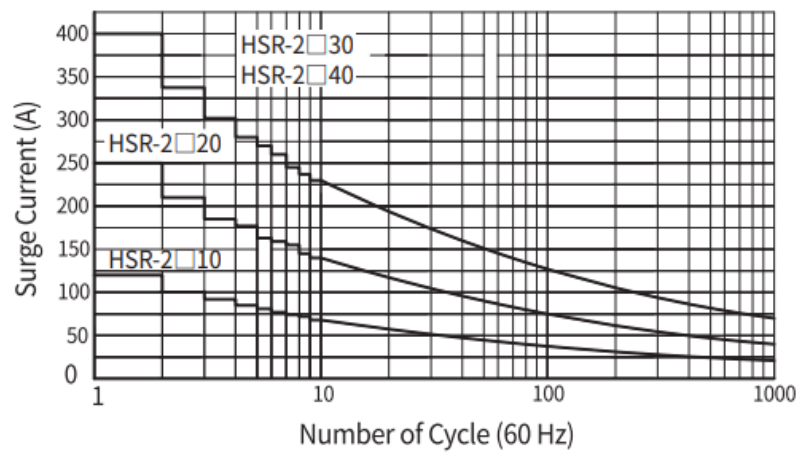

● 50 A, 70 A

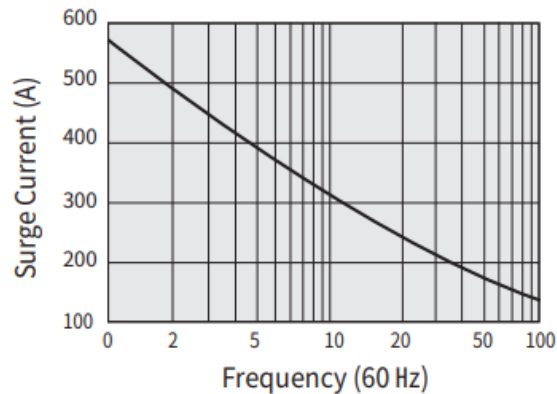

■ Precautions while using the heat sinks

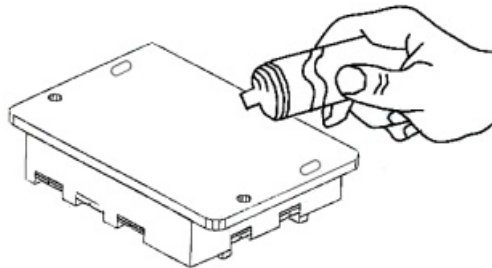


- Using standard heat sink and heat-dissipation grease is mandatory for this product.
- Even the standard heat sink is used, HSR damage may occur if the environment temperature rises or if the ventilation does not work well (environment temperature : over 40 °C)
- The normal HSR element is damaged at the maximum temperature of 125 °C or more. When the temperature of heat sink is 85 °C or higher, or more, the temperature of the element reaches around 125 °C. Therefore, during operation, measure the temperature of heat sink.
- When you connect HSR to the heat sink, heat-transmitting grease is needed for smooth heat transmission.
- To prevent separation by vibration, tighten up with bolts.
- Before installation, be sure to apply heat-dissipation grease to the contact surface i using the standard heat sink, as shown in the above picture. Do not use on insulation boards (wood, plastic, rubber)

For further information, please visit our homepage (www.hanyoungnux.com) and refer to the user's manual in the archive.

HANYOUNGNUX CO.,LTD
28, Gilpa-ro 71beon-gil, Michuhol-gu,
Incheon, Korea TEL : +82-32-876-4697
<http://www.hanyoungnux.com>
MC1001KE220701

Documents / Resources



[HANYOUNG NUX HSR-2D-2A Single Phase Solid State Relay](#) [pdf] Instruction Manual
HSR-2D-2A, HSR-2D-2A Single Phase Solid State Relay, Single Phase Solid State Relay, Phase Solid State Relay, Solid State Relay, State Relay, Relay

References

- [H HANYOUNG NUX](#)

Manuals+.