



Happizza 25mm Button Maker Machine Multiple Sizes Instruction Manual

[Home](#) » [Happizza](#) » Happizza 25mm Button Maker Machine Multiple Sizes Instruction Manual 



Instruction Manual


Contents

- 1 [Happizza Button Maker Machine Operation Method](#)
- 2 [Button Maker Machine Assembly Method](#)
- 3 [Documents / Resources](#)
 - 3.1 [References](#)

Happizza Button Maker Machine Operation Method




please go to the amazon product homepage to watch the use video

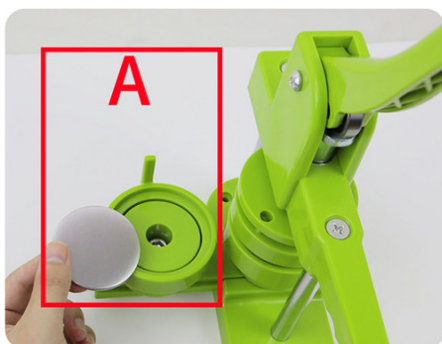

①




②

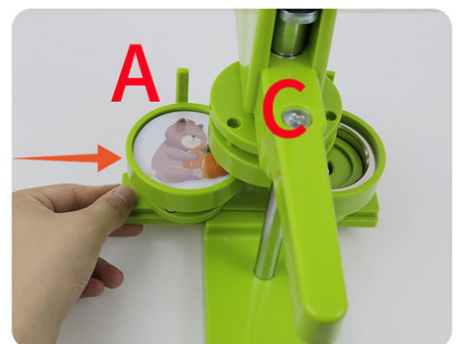

③

1. put one metal cover into mold
2. place the photo on the metal , and then cover with plastic film.
(Make sure it's one picture and one film)
3. Push mould A so that mould A is directly below mould C

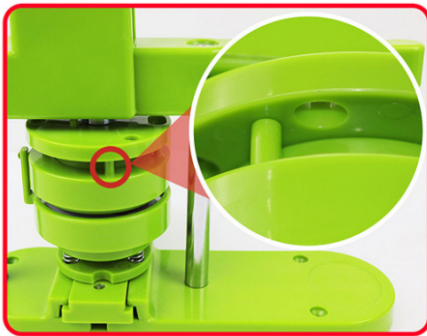

④




⑤




⑥

4. make sure that the support pin is against the round plate and cannot let the support pin pass through the hole on the side.
5. press the handle, and when you hear a sound, you can raise the handle.
6. at this point, you can find that the metal cover is already inside the mould above.

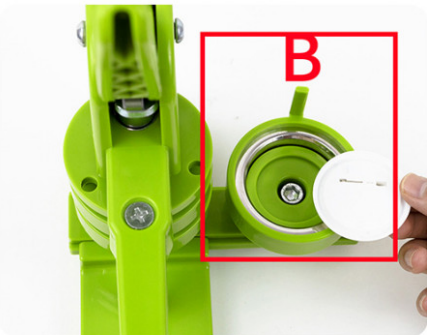

⑦

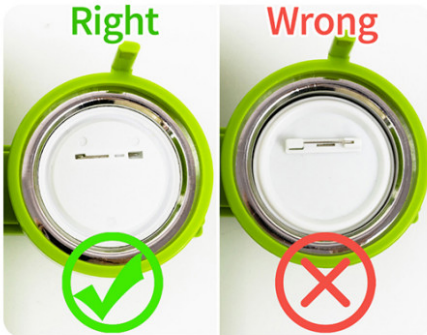

⑧



⑨

7. put the button back cover into mould B.
8. correct placement of the button back cover.
9. push mould B so that mould B is directly below mould C



⑩



⑪



⑫


10. Make sure that the support pin pass through the holes in the round plate.
11. the handle must be pressed all the way down until the handle touches the bar below, otherwise the buttons will spread out.
12. After the production is completed, the button is taken out of the mould.

Note: If you accidentally fail, do not reuse the failed material, it will result in another failed crafting session!


Button Maker Machine Assembly Method




Please go to the amazon product homepage to watch the use video

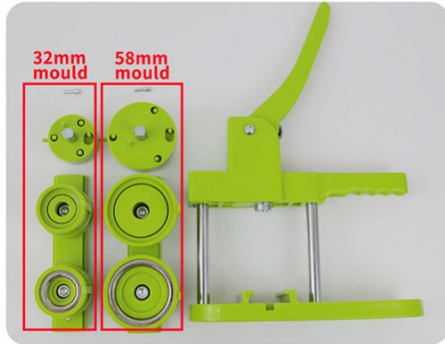

①

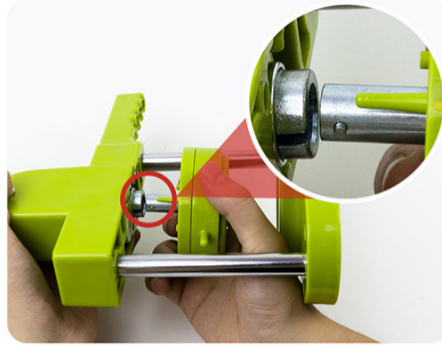


②

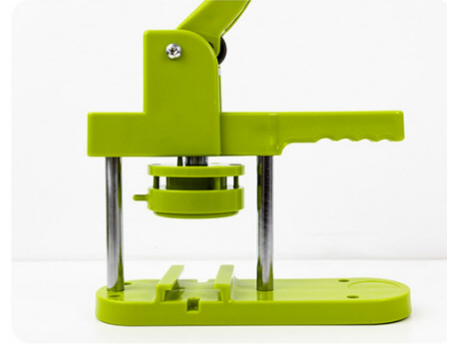


③


1. Button maker machine parts list (Including a machine frame, 1 set 32MM mould, 1 set 58MM mould, 2 pins).
2. install the 58mm mould, push the upper mould to the groove and push it to the bottom.
3. the upper mold installation is complete.

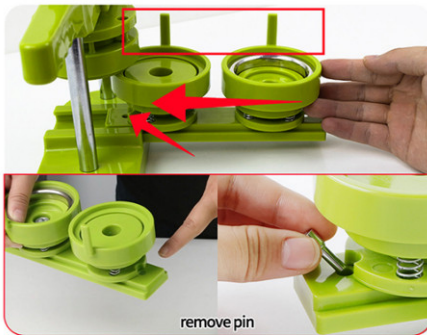

④

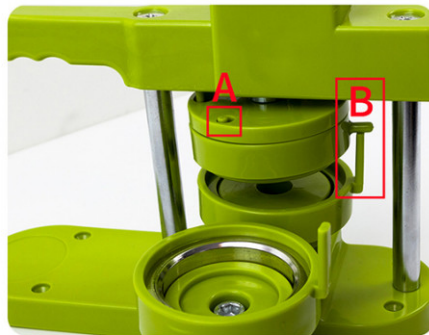


⑤

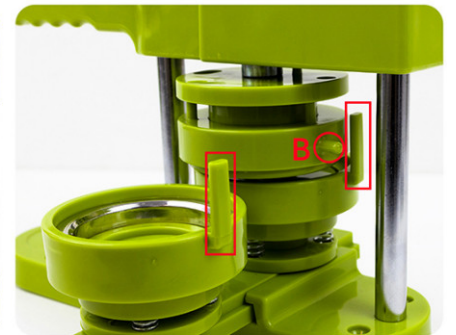


⑥


4. First remove the pin, then push the mould in the picture into the track, noting that the column marked in the picture is on the far side from us
5. pass the support pin of point A through the hole, while raising point B, let point B go over the column below.
6. At this point, point B is in the middle of the two columns.

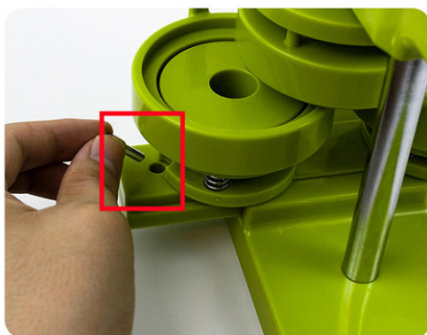

⑦

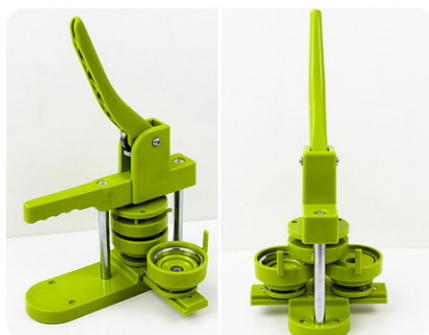

⑧

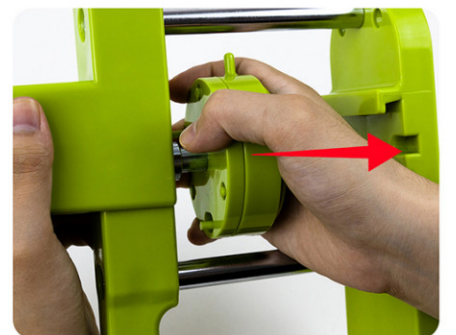

⑨

7. put the pin into the hole.
8. 58mm button maker machine assembly completed.
9. when replacing the 32mm mould, the steps are opposite to the assembly steps, and finally the upper part of the mould is pulled down by force.

Documents / Resources



[Happizza 25mm Button Maker Machine Multiple Sizes](#) [pdf] Instruction Manual
1 inch, 1.25 inch, 2.25 inch, 25mm, 32mm, 58mm, 25mm Button Maker Machine Multiple Sizes,
25mm Button Maker Machine Multiple Sizes, Maker Machine Multiple Sizes, Machine Multiple
Sizes, Multiple Sizes, Sizes

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.