



HINKLEY 82015 Double Bubble 2 Light Instruction Manual

[Home](#) » [HINKLEY](#) » HINKLEY 82015 Double Bubble 2 Light Instruction Manual 

HINKLEY

LARK

Assembly Instructions


Item No: 82015

Contents

- [1 82015 Double Bubble 2 Light](#)
- [2 I.S. 18 wiring grounding instructions](#)
- [3 IS200 Caulking Instructions](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)

82015 Double Bubble 2 Light

Drawing 1 – Fixture Mounting

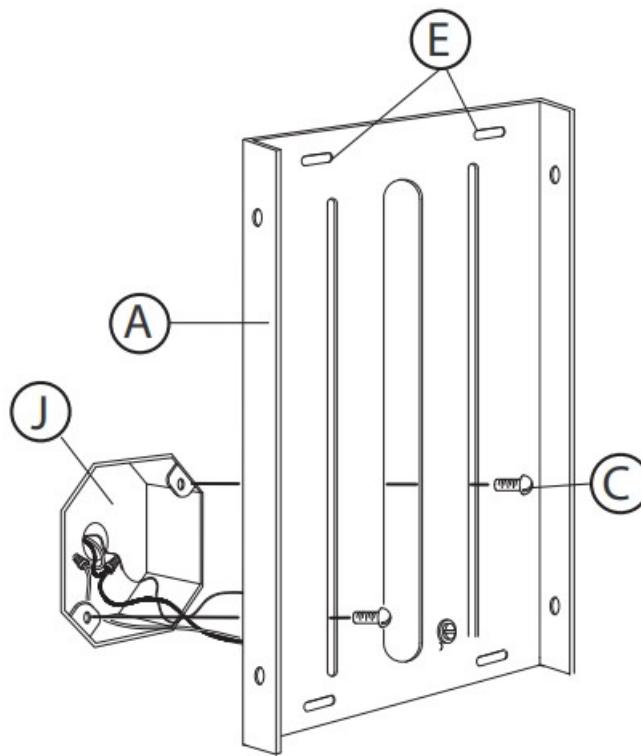


start here

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.
 1. To begin the installation of your fixture, you will first need to remove the mounting plate (A) from the backplate; see Drawing 1. This is accomplished by removing the screws from the sides of the backplate see Drawing 2. Set the screws aside in a safe place.
 2. Take the mounting plate (A) and secure it to the junction box (J) located on the wall using two 8-32 screws (C) NOT PROVIDED. NOTE: Mounting plate location is adjustable. It can be adjusted up or down. This allows you to adjust the location of the fixture in relation to the junction box. After determining the location, tighten the screws (C) to secure the mounting plate to the junction box. Making sure the mounting plate is level. The junction box wires should slide through the large center slot in the mounting plate.
 3. Now make all wiring connections following the IS-18 instruction sheet provided.
 4. After wiring is completed, slide the backplate onto the mounting plate and align the holes on the sides of the mounting plate with the holes on the side of the backplate and thread in the screws removed earlier.

NOTE: ADDITIONAL MOUNTING PLATE SUPPORT CAN BE ADDED USING HOLES (E) IN THE MOUNTING PLATE AND APPROPRIATE WALL ANCHORS. – SEE DRAWING 1.

Drawing 2- Cage Installtion

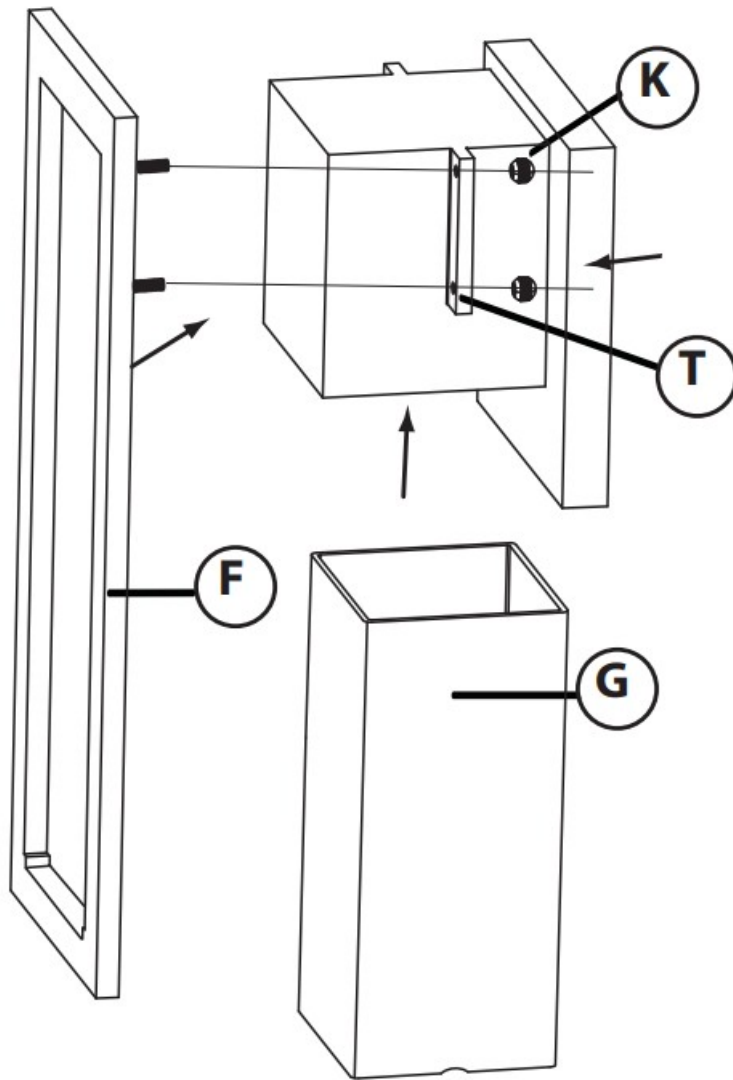

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to complete installation of this fixture.


1. Install appropriate bulb into fixture socket
2. To secure glass push glass (G) into the opening at the top of fixture (T)
3. Slide front cage (F) over glass (G) and lock up front cage of fixture using the to provide knobs (K)
4. Fixture is now ready to be powered on

Note: Please make sure glass is fully supported during install . Do not let go of glass until front cage is fully supporting glass

I.S. 18 wiring grounding instructions

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (IS 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS

Drawing 1 – Flush Mount

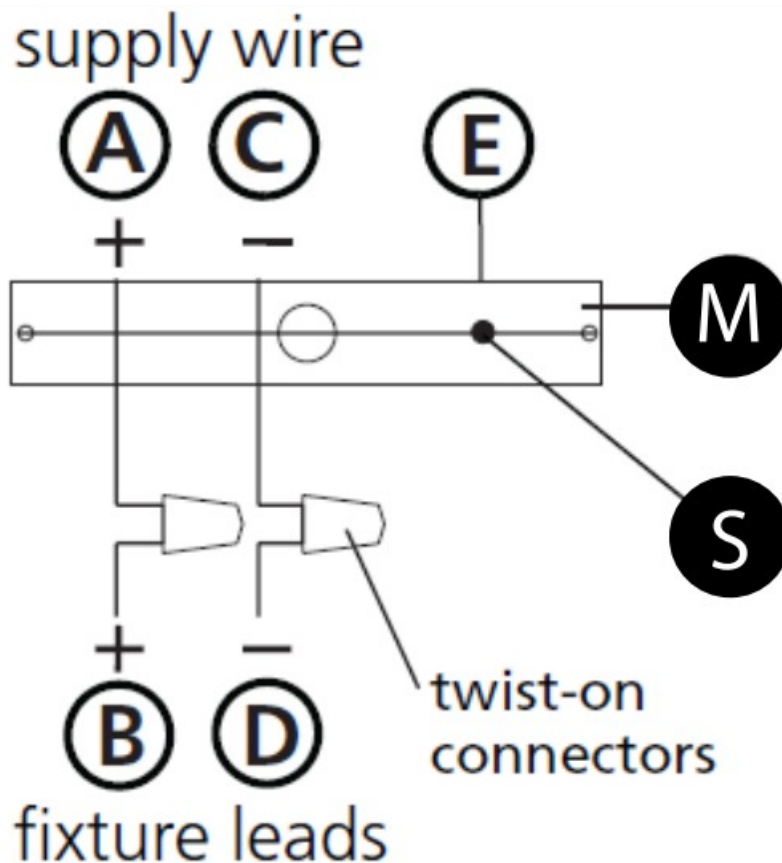


wiring instructions Indoor Fixtures

1. Connect positive supply wire (A) (typically black or the smooth, unmarked side of the two-conductor cord) to positive fixture lead (B) with appropriately sized twist on connector – see Drawings 1 or 2.
2. Connect negative supply wire (C) (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead (D).
3. Please refer to the grounding instructions below to complete all electrical connections


Outdoor Fixtures

1. Connect positive supply wire (A) (typically black or the smooth unmarked side of the two-conductor cord) to positive fixture lead (B) with appropriately sized twist on connector – – – see Drawings 2 or 3.
2. Connect negative supply wire (C) (typically white or the ribbed, marked side of the two-conductor cord) to negative fixture lead (D).
3. Cover open end of connectors with silicone sealant to form a watertight seal.
☒ If installing a wall mount fixture, use caulk to seal gaps between the fixture mounting plate (backplate) and the wall. This will help prevent water from entering the outlet box. If the wall surface is lap siding, use caulk and a fixture mounting platform specially.
4. Please refer to the grounding instructions below to complete all electrical connections.

Drawing 2 – Chain Hung

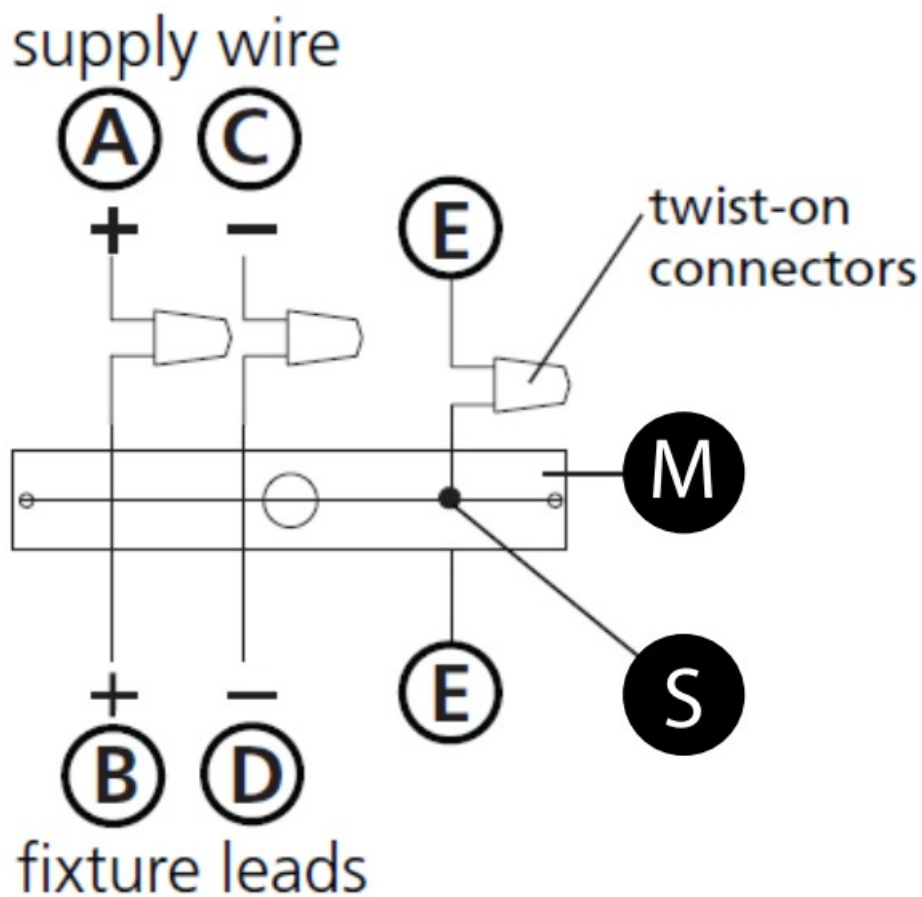

Drawing 3 – Post-Mount

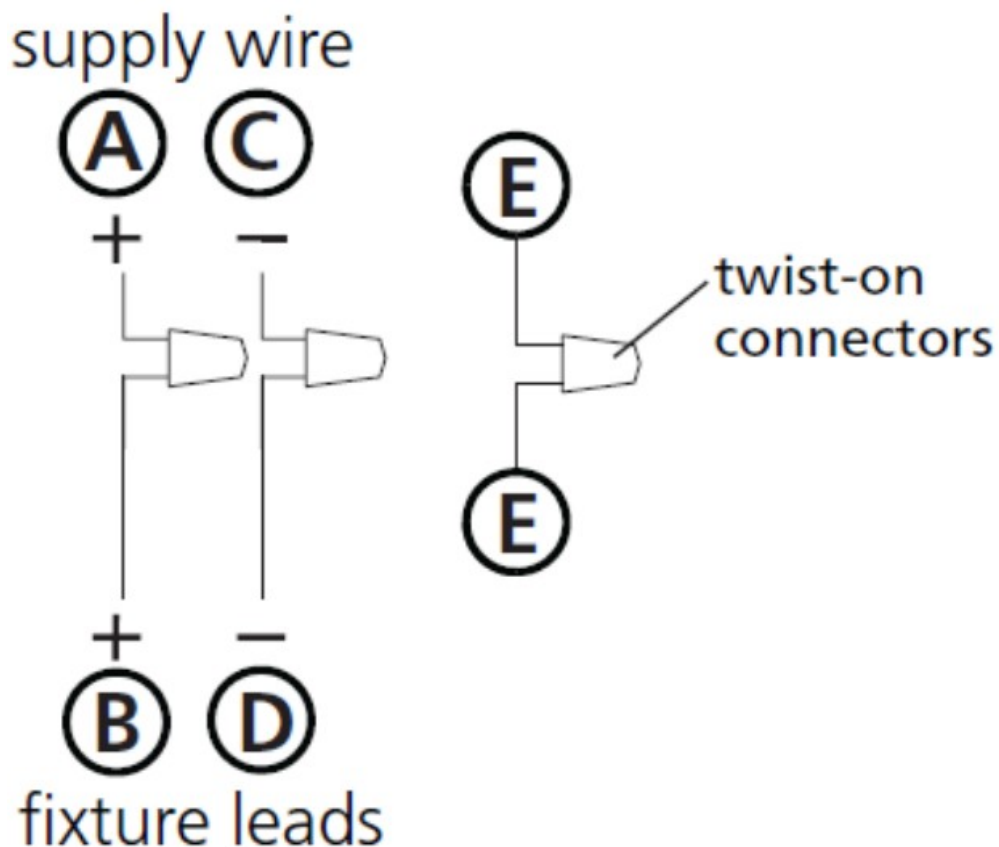

grounding instructions

Flush Mount Fixtures

For positive grounding in a 3-wire electrical system, fasten the fixture ground wire (E) (typically copper or green plastic coated) to the fixture mounting strap (M) with the ground screw (S) – see Drawing 1.

Note: On straps for screw supported fixtures, first install the two mounting screws in strap. Any remaining tapped hole may be used for the ground screw.

Chain Hung Fixtures

Loop fixture ground wire (E) (typically copper or green plastic coated) under the head of the ground screw (S) on

fixture mounting strap (M) and connect to the loose end of the fixture ground wire directly to the ground wire of the building system with appropriately sized twist-on connectors – see Drawing 2.


Post-Mount Fixtures

Connect fixture ground wire (E) (typically copper or green plastic coated) to power supply ground with appropriately sized twist-on connector inside post. Cover open end of connector with silicone sealant to form a watertight seal – see Drawing 3.


IS200 Caulking Instructions

start here


After securing fixture to the wall it is recommended that the gap between the wall and the fixture backplate be sealed on the top and both sides, with a good quality waterproof caulk or silicone sealant (NOT INCLUDED) – see Drawing 1.

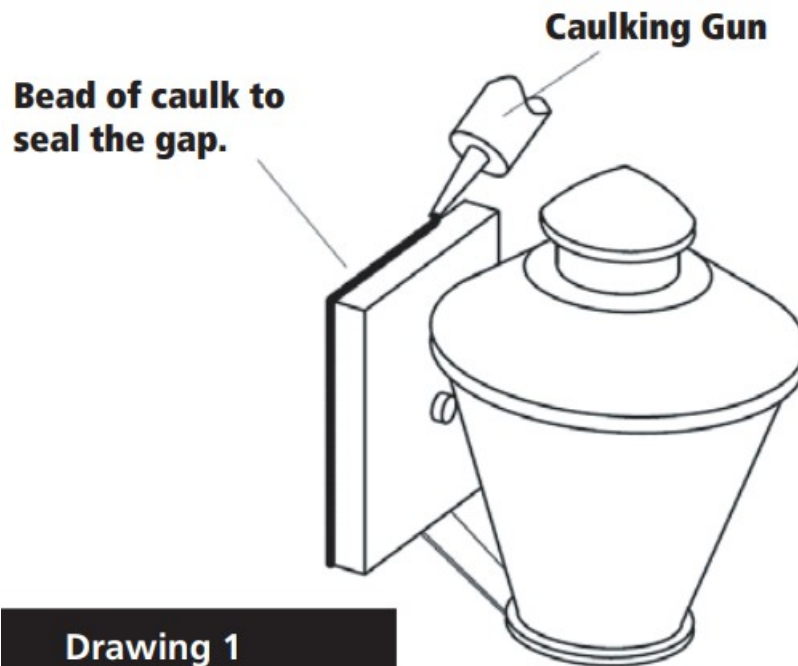

After securing fixture in place it is recommended that the gap between the mounting top and fixture base be sealed with any good quality waterproof caulk or silicone sealant (not included). It is also recommended that a small bead of caulk or sealant be put under the ball knobs used to mount fixture – see Drawing 2.

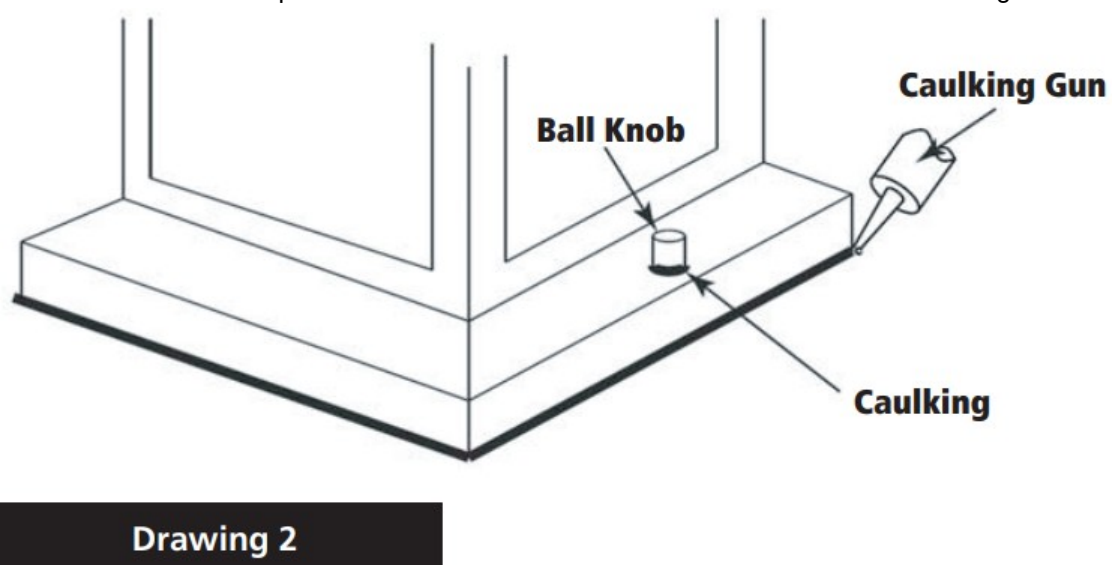

Documents / Resources

	<p>HINKLEY 82015 Double Bubble 2 Light [pdf] Instruction Manual 82015 Double Bubble 2 Light, 82015, Double Bubble 2 Light, Bubble 2 Light, 2 Light, Light</p>
---	---

References

-  [Lark Homepage](#)