



## Contents [ [hide](#) ]

- [1 Hishell F12 AI Simultaneous Language Translator](#)
- [2 Product Usage Instructions](#)
- [3 Key description](#)
- [4 On/Off button](#)
- [5 Voice Translation Online mode](#)
- [6 Offline Translation Mode](#)
- [7 Photo Translation Mode](#)
- [8 Simultaneous Interpretation](#)
- [9 Mobile group chat translation](#)
- [10 Conference Mode](#)
- [11 Warranty](#)
- [12 FCC](#)
- [13 FAQ](#)
- [14 Documents / Resources](#)
  - [14.1 References](#)



## Hishell F12 AI Simultaneous Language Translator



## Specifications

- **Input:** 100-240V~50/60Hz 0.2A
- **Output:** 5V==1A standard power supply

## Product Usage Instructions

### Photo Translation Mode

1. This mode allows you to take a photo and translate the text featured on it.
2. Click the Photo translation icon, select the original language you want to take a photo in, and select the other language you want to translate on the top right.
3. Take a picture of the text you want to translate by pressing the middle round icon on the screen; the text of the picture will be translated after 3~5 seconds.
4. Click Text on the top to see the translation text, click the yellow or blue speaker to broadcast the language.

### Mobile Group Chat Translation

1. This function can create a remote chat room: set your name, select your language,

and click to create.

2. The participants can enter the code and press Join, then enter their name and select the language and press Input to start.

## Note on Charging Power

- This product is not equipped with a power charger.
- Users could use the attached cable and their charger.
- Power charger must conform to CE/UL certifications.

## Key description



## On/Off button

- **Power On:** Long-press the power button until the screen turns on.
- **Shut Down:** Press the power key for more than 2s, Press Power off “to turn off the device.
- **Reboot:** Press “Reboot” to restart the device.
- **Volume key:** Adjust the volume “+/-
- **BACK key:** Return to main menu.
- **System Language:** English, Spanish, German, Italian, French, Russian, Polish, Chinese Simplified, Chinese Traditional, Japanese, Thai, Vietnamese, Korean, Arabic, etc.



## Voice Translation Online mode

1. Make sure to connect to personal WiFi /Hotspot successfully, and click the “Voice” translation icon to enter the translation interface first.
2. Select “Mother tongue language ” in the upper left icon, then select “Foreign language” in the upper right icon. As shown below.
3. Long-press and hold the “Mother tongue input key” or Foreign language input key” to speak. After you finish speaking and releasing the key, the translator will automatically translate




## Note

1. This function needs to be used in a private network, NOT to support secondary authentication for WiFi, such as airport WiFi and public WiFi
2. Click the speaker icon on the screen to play the voice repeatedly
3. The clearer the voice input is, the more accurate the recognition is. The maximum input time is one minute.

## Offline Translation Mode


1. The “Offline translation” mode can be used in an environment without a network.
2. Select “Mother tongue language” in the upper left icon, then select “Foreign language” in the upper right icon. As shown below.

3. Long-press and hold the “Mother tongue input key” or Foreign language input key” to speak. After you finish speaking and releasing the key, the translator will automatically translate.

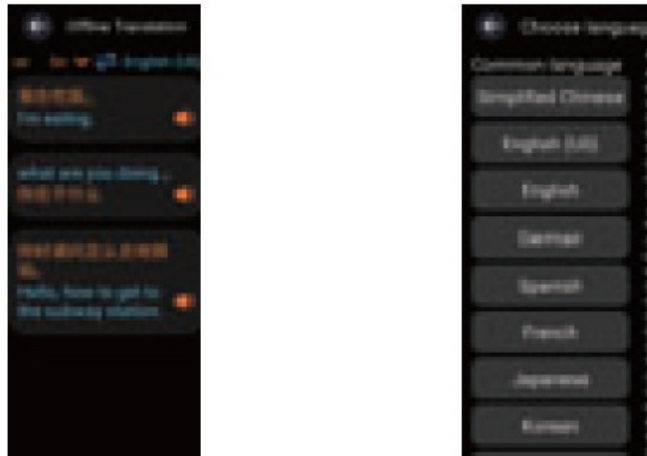

## Photo Translation Mode

1. This mode allows you to take a photo and translate the text featured on it.
2. Click the “Photo translation” icon, select the original language you want to take a photo, and select other language you want to translate on the top right.
3. Take a picture of the text you want to translate by pressing the text icon on the screen, the ex of picture will be translated after 3-5 seconds.
4. Click “Text” at the top to see the translation text, and click the yellow or blue speaker to broadcast the language.

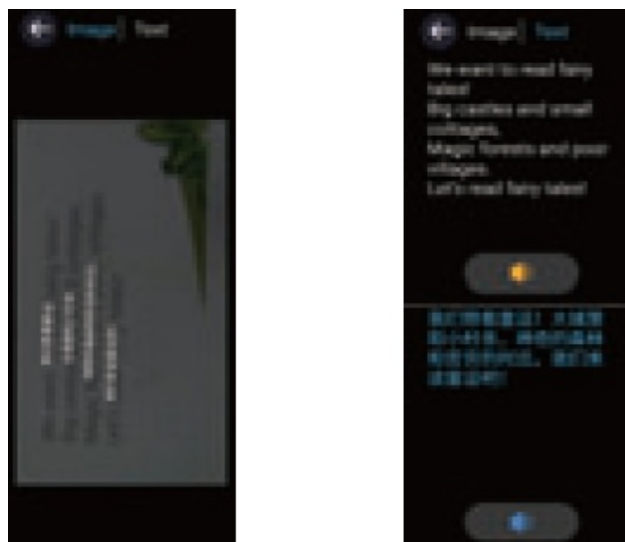


## Note:

1. This function can be used in the environment with or without a network.
2. Try to shoot and translate in horizontal or vertical text.

3. Make sure the image quality is good enough to ensure proper text detection.
4. Click the picture in the bottom left corner, and click on the top icon to delete it.

## Recording Translation Mode

1. Click the “Recording” icon, click the + icon to select the translation mode. There are three recording modes for optional.
2. Select the translation of the original text / the original,/the translation modes. Select the language you want to record and translate on the top bar.
3. Click the speaker button on the screen, the timer will start to record, and the text will appear on the screen.
  - Then click “Save recording”.

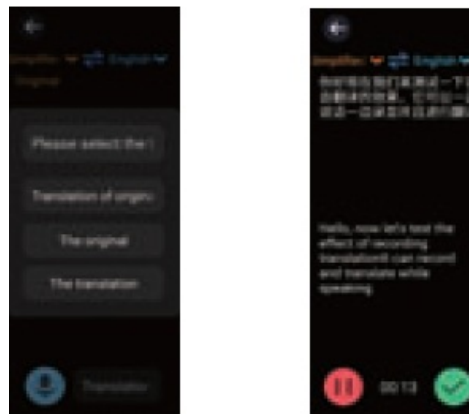

## NOTE

1. Click the “Play icon” below to play the input voice
2. Click the “Pencil icon” to clean the recording file and free up space
3. The clearer the voice input, the more accurate the translation.

## Simultaneous Interpretation

1. Click the “Interpret” icon and click “Enter” on the screen; this function can be converted into corresponding text and translated while speaking.
2. It can also be shared with others, please scan the QR code on the screen by Wechat, Facebook, Google etc., it will be translated to other device simultaneously.



## Mobile group chat translation

1. This function can create a remote chat room: set your name, select your language, and click to create” generate a QR code. Take a photo of the QR code and send it to your friends for scanning, and you can click ” Star to enter the chat room.
2. When your friends enter the chat room, they need to set a name and language.
3. In the chat room, you can speak in your native language. You just need to press and hold the”Mother tongue input key” to speak, your language will be automatically translated into your friends native language on the screen.
  - The same, when your friends speak, their content will be automatically translated into your own native language on the screen.



## Note:

1. This function needs to be used in a private network, NOTto support secondary authentication WiFi, such as airport WiFi and public WiFi.
2. Participants must scan the QR code ,sharing the QR code with the other party through social media, then enter the chat room.

## Conference Mode

- This function requests two or more devices, click the “Conf icon.
- To create a new conference, press Start and input your name and select your language, then press Input.
- The device will generate a code to share with other participants.
- The participants can enter the code and press Join, then enter name and select the language and press Input to start.

## **Input Mode**

- Enter text in the bottom bar to translate your target language; this function only supports English and Chinese currently.

## **Learning Mode**

- This mode allows you to practise the pronunciation of the words you have translated. This mode must be connected to a WiFi network.

## **Sos Mode**

- Included different countries emergency call numbers.

## **Tool**

- Included Dictionary, Clock, and Exchange Rate.

## **Favorites Mode**

- This mode is used to collect words and sentences, or videos that can be reviewed frequently.

## **Setting Mode**

- WiFi setting, Brightness, System Language, Speed, Sound, Front, Time Zone, Switch input method, Date and time, Update, etc.

## **Bluetooth**



- After turning on the Bluetooth switch, you can set the Bluetooth device you want to link to achieve various expansion functions

### **Note: Charging Power**

- This product is not equipped with a power charger.
- The user could use the attached cable and their charger.
- Power charger must conform to the CE/UL certifications.
- **Input:** 100-240V~50/60Hz 0.2A ,
- **Output:** 5V==1A standard power supply.

### **Warranty**

- To prevent fire or shock hazard, disconnect your device from the power source when cleaning. Use a soft, clean cloth to clean it.
- This product does not have a waterproof design. Please do not use it in splashing water or other environments that may cause water ingress.
- Do not disassemble this product and its accessories by yourself.
- This product is covered by our 1-year warranty program.

### **FCC**

This device complies with part 1.5 of the F Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference,
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, under Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used according to the instructions, may cause harmful interference to radio

communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

The device has been evaluated to meet the general RF exposure requirements. The device can be used in portable exposure conditions without restriction.

## **FAQ**

How is the accuracy of device?

In daily dialogue, the accuracy rate is up to 98%.

How to operate and speak properly to make sentence more accurate?

Press the button for 1 to 2 seconds properly, and then release the button after you finish. Please try to speak standard language and avoid using a mantra or slang. consistently Avoid multiple pauses or merge statements. Try to avoid professional terminology.

If the product crashed while it's working?

Press and hold the power button for over 15 seconds. Then release the button to see if its screen works or not.

If the product can't connect to WiFi?

Make sure the device is connected to WiFi 2.4G mode and enter the correct password. Or try to connect to your hotspot on your cellphone for testing. WiFi network that requires a web page login, such as hotels, airports and public places, are not supported


If the product can't be turned on?

To check if the device has run out of battery, please charge It's been above half an hour, then press the power button for about 3-5 seconds to turn it on again

If product can't be charged?

To check if it is a properly matched power adapter. To check that the wires and connectors are properly connected

## Documents / Resources

	<a href="#">Hishell F12 AI Simultaneous Language Translator [pdf]</a> Instruction Manual 2AYC5-F12, 2AYC5F12, F12 AI Simultaneous Language Translator, F12, AI Simultaneous Language Translator, Language Translator, Translator
---	---

## References

- [User Manual](#)

■ Hishell

◆ 2AYC5-F12, 2AYC5F12, AI Simultaneous Language Translator, F12, F12 AI Simultaneous Language Translator, Hishell, Language Translator, Translator

---

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.