

HOMEWERKS 75-105-AX LED Mirror with Alexa Built In and Bluetooth Speakers User Manual

HOMEWERKS 75-105-AX LED Mirror with Alexa Built In and Bluetooth Speakers



Questions, problems, missing parts?

Before returning to the store, call our customer service department at 1-877-319-3757, 7:30 a.m. – 4:30 p.m., CST, Monday – Friday

READ AND SAVE THESE INSTRUCTIONS

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

The Bluetooth word mark and logos are owned by Bluetooth SIG, Inc. Other third-party brands and names are the property of their respective owners.

Homewerks, Homewerks Worldwide, the Homewerks house design, and all related logos are trademarks owned by Homewerks Worldwide, LLC U.S. Pat. No. 9,398,357

Homewerks.com

Contents


- [1 HARDWARE INCLUDED](#)
- [2 FCC Compliance](#)
- [3 SAFETY INFORMATION](#)
- [4 PREPARATION](#)
- [5 WIRING DIAGRAM](#)
- [6 INSTALLATION INSTRUCTIONS](#)
- [7 CONTROL PANEL OPERATION](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

HARDWARE INCLUDED

(not shown actual size)


- Mounting Screw Qty. 3

AA



- Drywall Anchor Qty. 4

BB



- Wire Connector Qty. 3

CC




- Z-bar Qty. 1

DD



- Locking screw Qty. 1

EE



FCC Compliance

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or changes to this equipment. Such modifications or changes could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and ca

radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

1. Always disconnect the power supply prior to installing, servicing or removing the LED mirror.
2. Installation work and electrical wiring must be done by a qualified person(s) in accordance with all applicable codes and standards, including fire-rated construction.
3. Follow all local building, safety and electrical codes as well as NEC (National Electrical Code) and OSHA (Occupational Safety and Health Act).
4. Electric service supply must be 120 volts, 60 hertz.
5. This product must properly connect to the grounding conductor of the supply circuit.
6. Do not bend or kink the power wires.
7. When cutting or drilling into the wall or ceiling, do not damage electrical wiring and other hidden utilities.
8. Avoid putting sharp or hard objects against mirror surface. Damage and/or injury may occur if punctured.
9. Turn off product during storms or power surge situations to avoid damage to internal components.

PREPARATION

Before beginning assembly of product, make sure all parts are present.

Compare parts with package and hardware contents list. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.


Estimated Installation Time: 30 minutes

Tools Required for Assembly (not included): Tape Measure, Phillips Screwdriver, Hammer, Electric Drill, Drill Bits, Level, and Pencil.

Please follow all local electrical codes and consult an electrician when wiring this product.

IMPORTANT: 2.4 GHz Wi-Fi connection and Amazon Alexa account are required for full functionality.

WIRING DIAGRAM

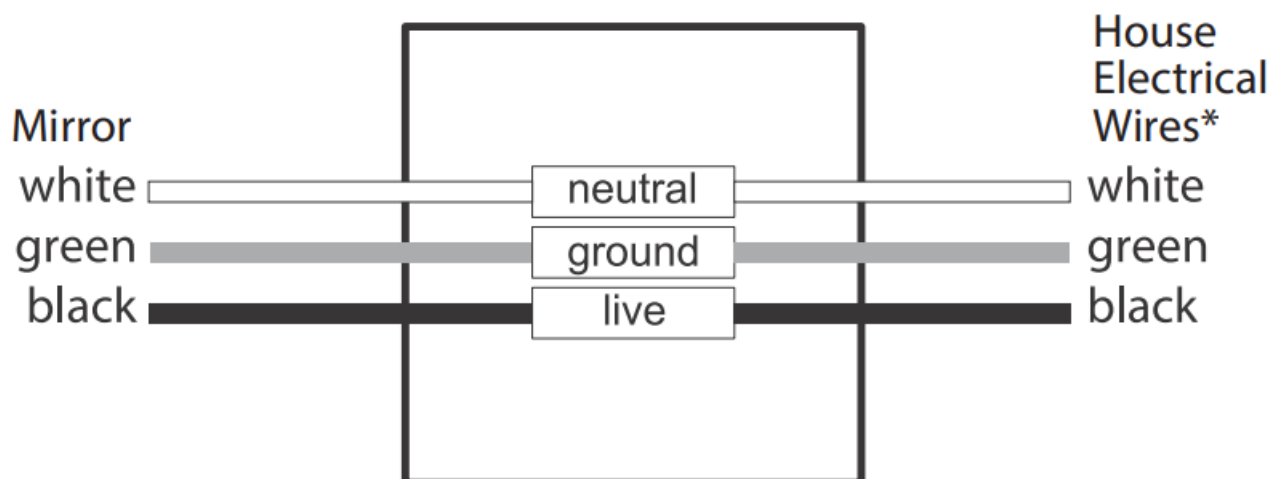

Installation may vary depending on how the previous mirror was installed and the presence of the power source. Supplies necessary for installation of your new mirror are not all included; however, most are available at your local home improvement or hardware store.


* House wires may vary in color. Please be sure to verify actual house wires with a certified electrician before installation.



INSTALLATION INSTRUCTIONS




WARNING: Turn off power at circuit breaker or remove fuse before attempting installation.

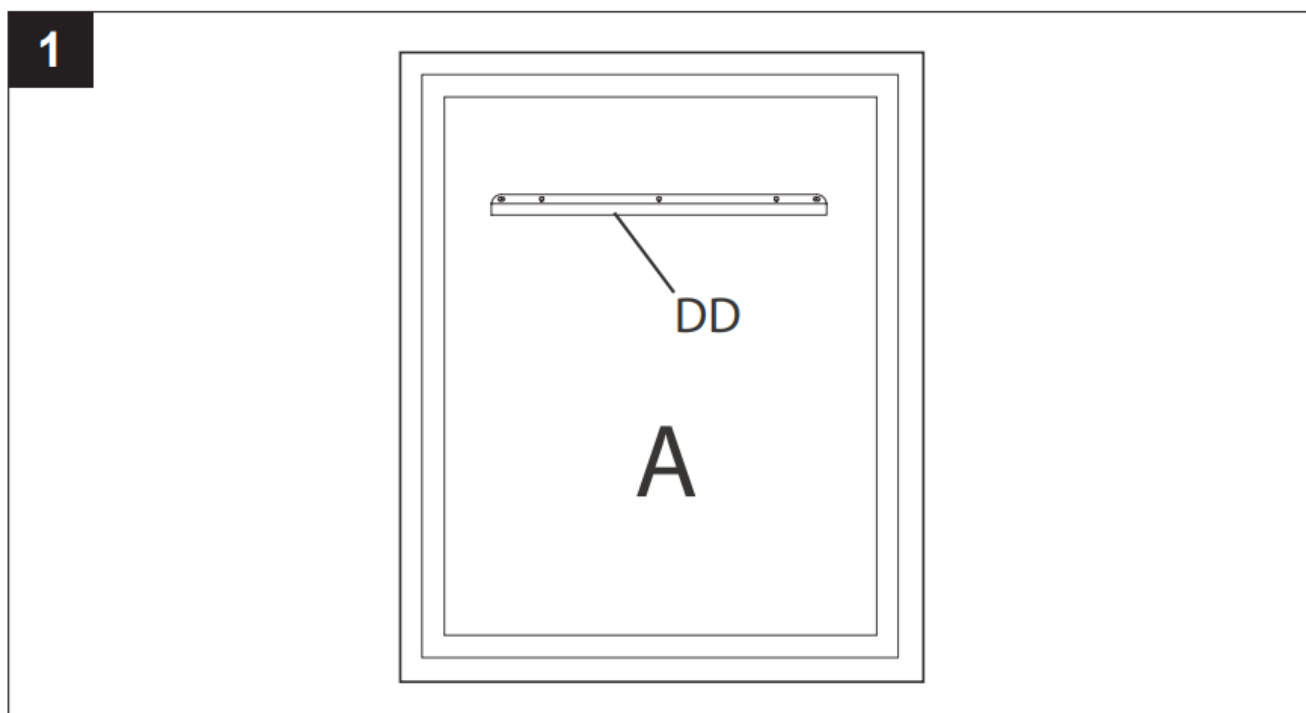

1. Determine the midpoint of where the mirror will be installed and mark with a pencil. Place the Z-bar (**DD**) on the wall with the middle hole of the Z-bar (**DD**) positioned over the midpoint.



Hardware Used		
	Z-bar	 x 1

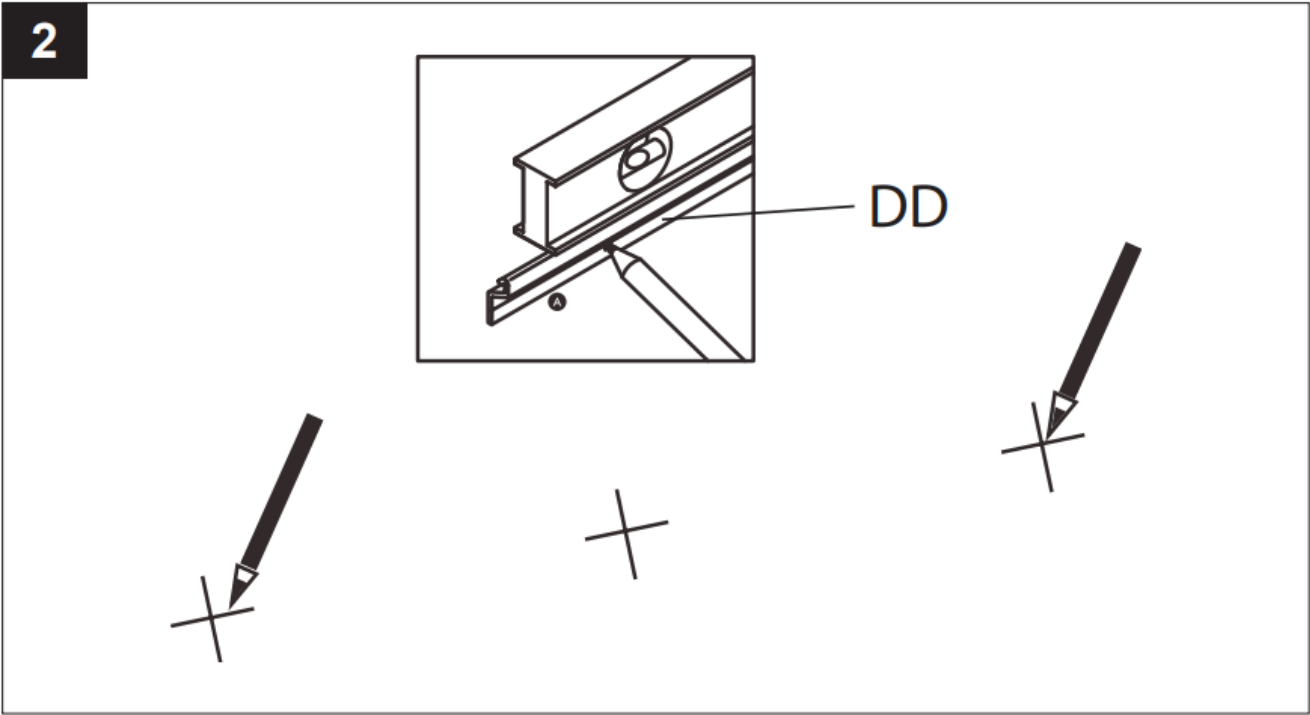
2. Using a level, make sure the Z-bar **(DD)** is straight and mark the other two holes on the Z-bar **(DD)** located to the right and left sides. Remove the Z-bar **(DD)**



Hardware Used		
	Z-bar	 x 1

3. Using a 7/32 in. drill bit **(not included)**, drill holes in the wall where marked and insert drywall anchors **(BB)**.


3

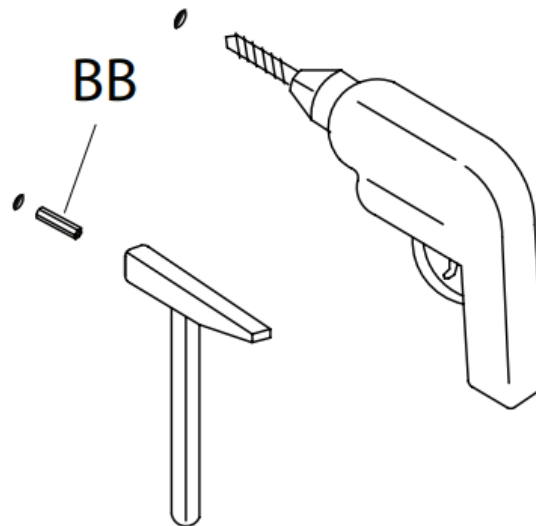

Hardware Used

BB

Drywall anchor




x 3



4. Place the Z-bar (DD) on the wall and insert the mounting screws (AA) through the Z-bar (**DD**) and into the drywall anchors (**BB**).

Tighten the mounting screws (**AA**) until the z-bar (**DD**) is securely attached to the wall.

4

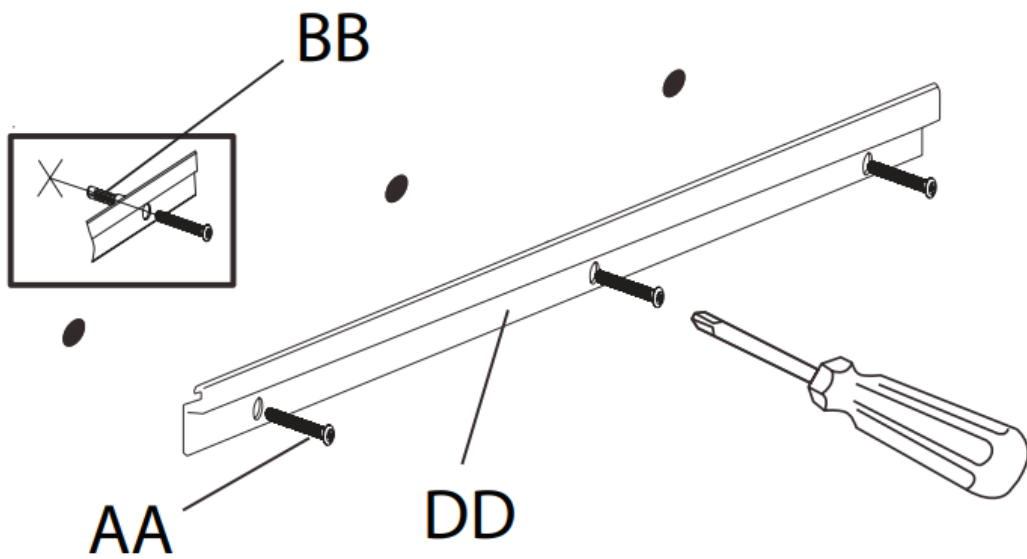


Hardware Used

<p>AA</p>	<p>Mounting screw</p>	 <p>x 3</p>
<p>DD</p>	<p>Z-bar</p>	 <p>x 1</p>

- Using a level, mark the appropriate distance down from the center of the Z-bar (**DD**) depending on the size of the mirror. Drill a 7/32 in. hole at this location and insert a drywall anchor (**BB**).


5

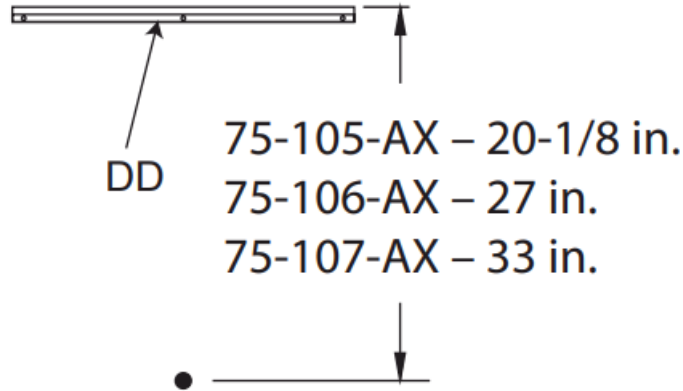

Hardware Used

BB


Drywall ancho



x 1


6. Drive the locking screw (EE) into the lower drywall anchor (BB), leaving 1/2 in. exposed.

6

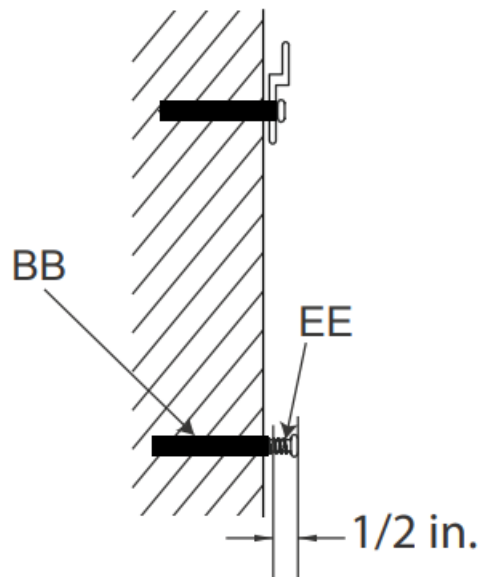

7. Connect the white wire from the mirror (A) to the white wire from the electrical box. Connect the black wire from the mirror (A) to the black wire from the electrical box. Connect the green ground wire from the mirror (A) to the ground wire from the electrical box. Cover and secure each wire connection with a wire connector (CC).

7

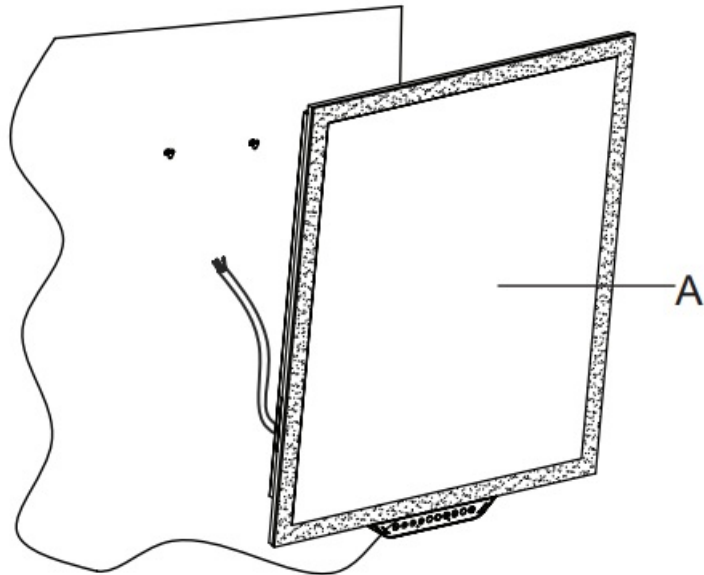

Hardware Used




Wire connector





x 3


8. Carefully attach the mirror (A) to the z-bar (DD), centering it and ensuring it is secure. The locking screw (EE) will align with the keyhole bracket on the back of mirror. Once the locking screw (EE) is aligned through the keyhole slot, move the mirror slightly to either side to lock it in place.
- Once the mirror (A) is securely in place on the Z-bar (DD), turn on the power at the circuit breaker or reinsert the fuse.

8

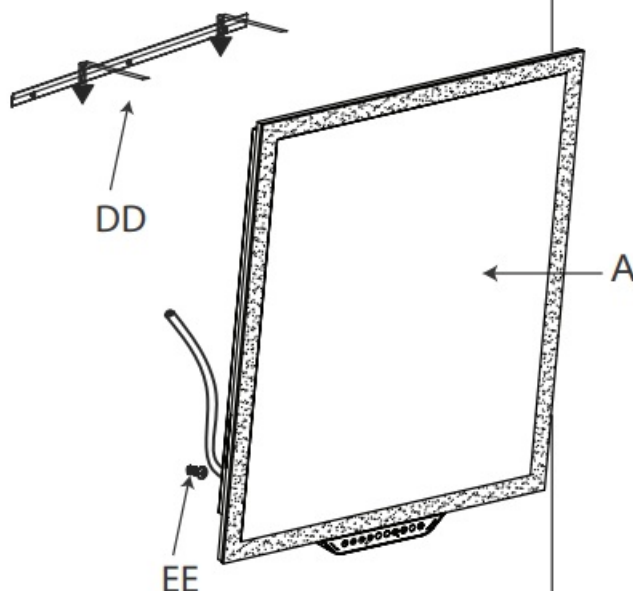


DD		 x 1
EE	Locking	 x 1

CONTROL PANEL OPERATION

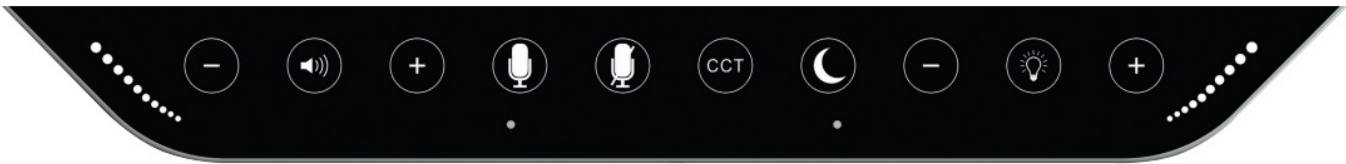


1. When power is off, there is no light on the control panel. When power is on, it will be dimly lit. When the control panel is in use, it will be fully lit.
2. When the mirror is powered up, it will search for the Wi-Fi connection automatically. If the mirror finds a new Wi-Fi connection, use the Homewerks app to connect to the new Wi-Fi connection.




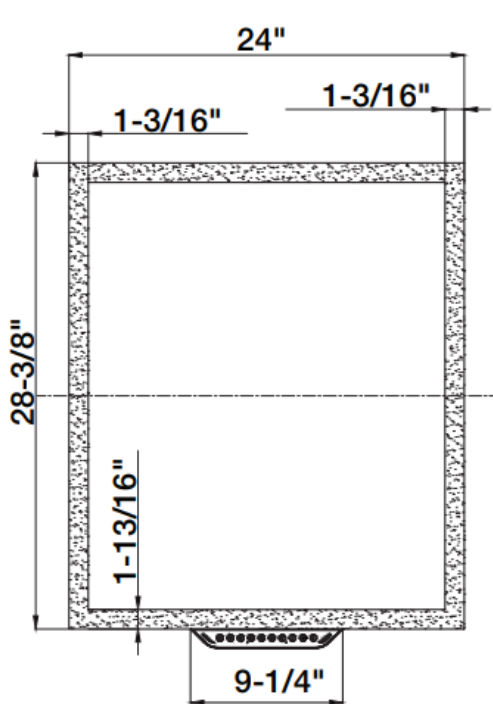


Front view

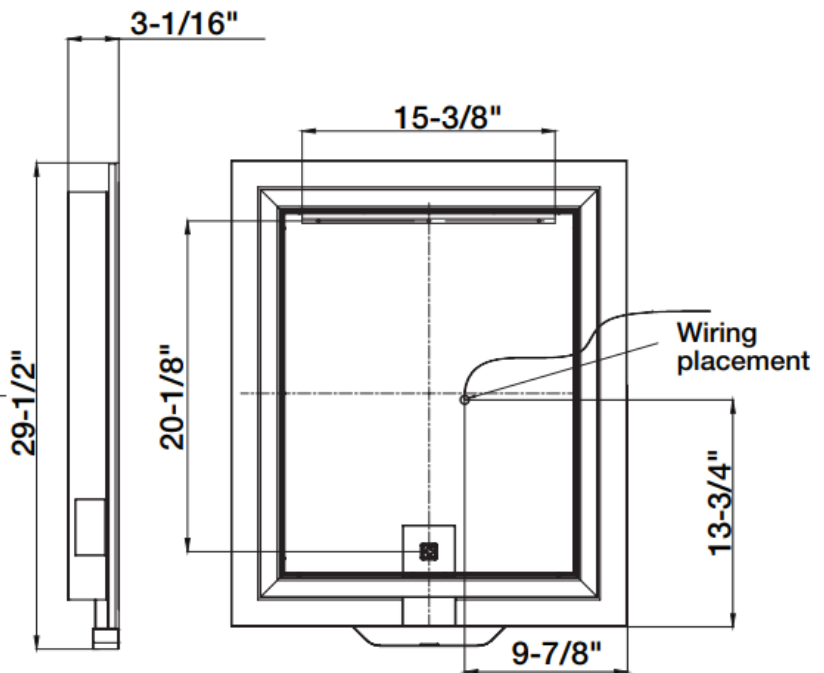


Back view

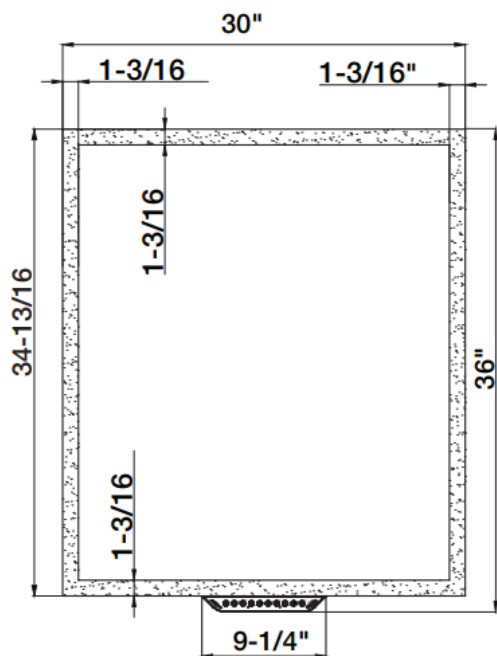


Front view

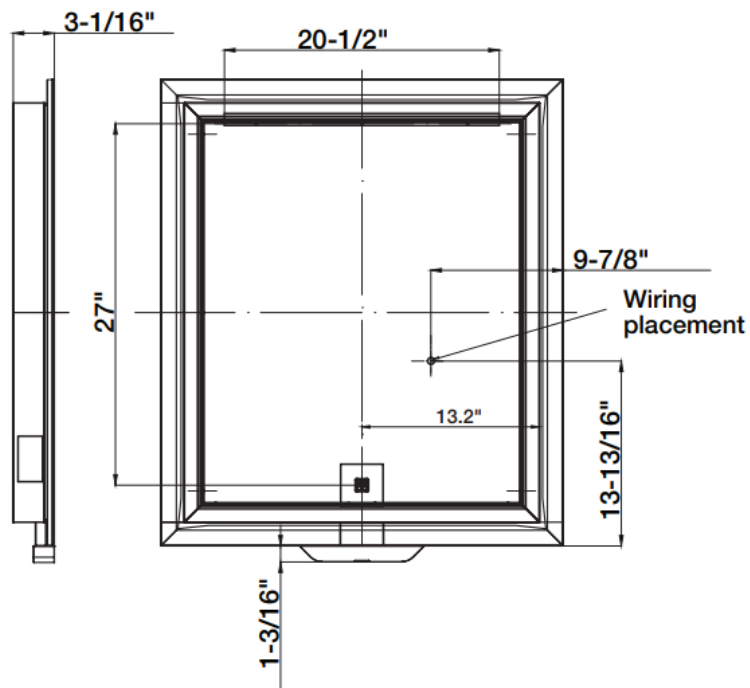


Back view

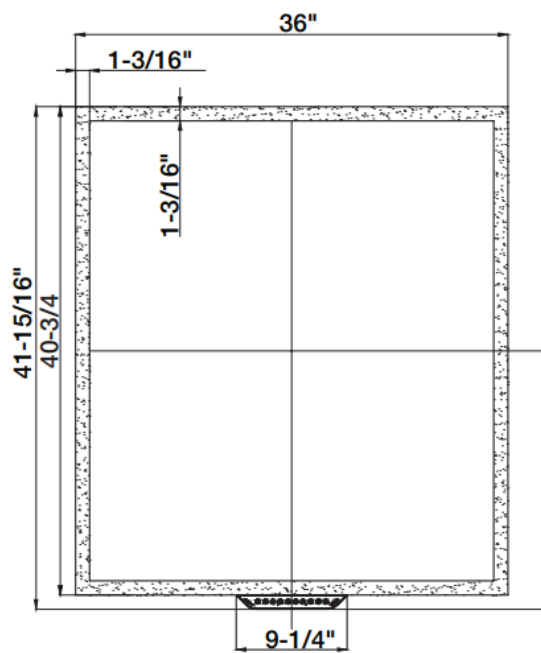


Front view

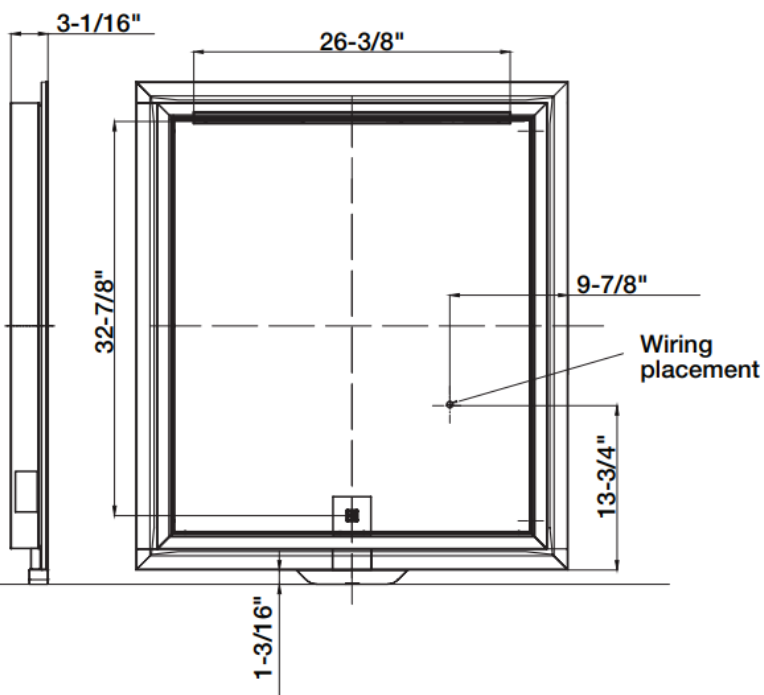


Back view

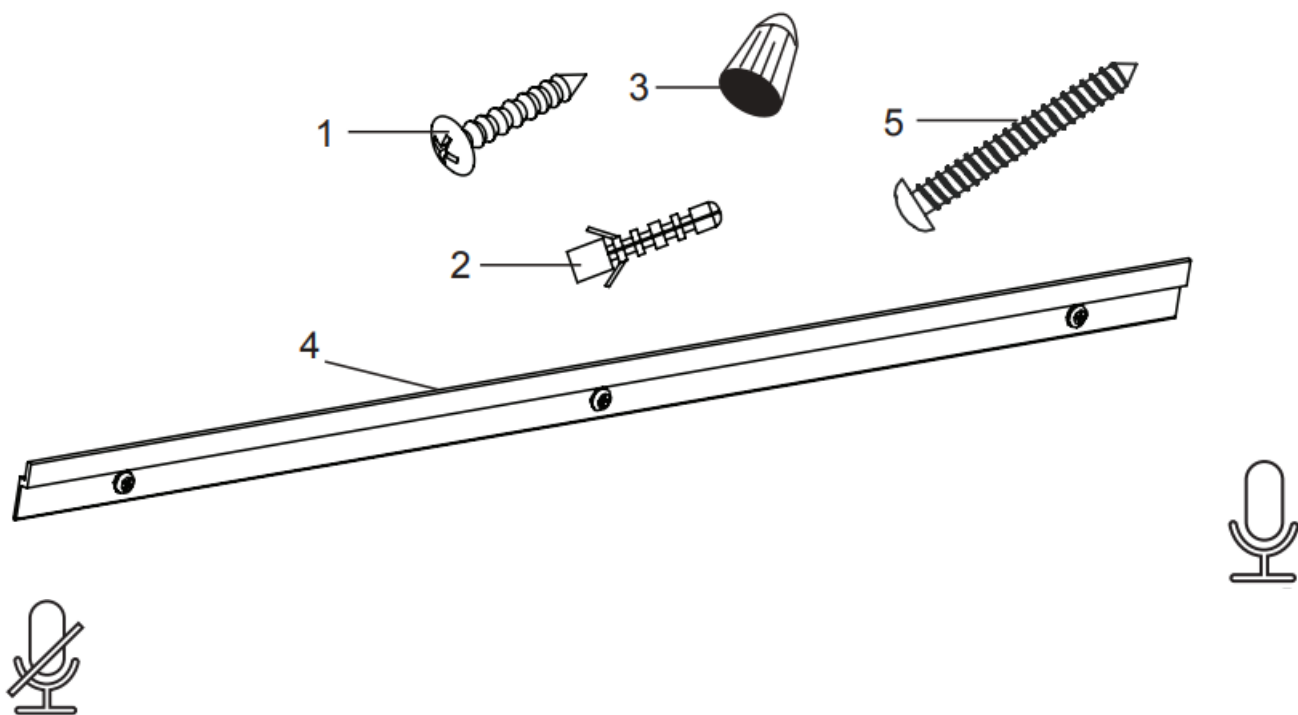



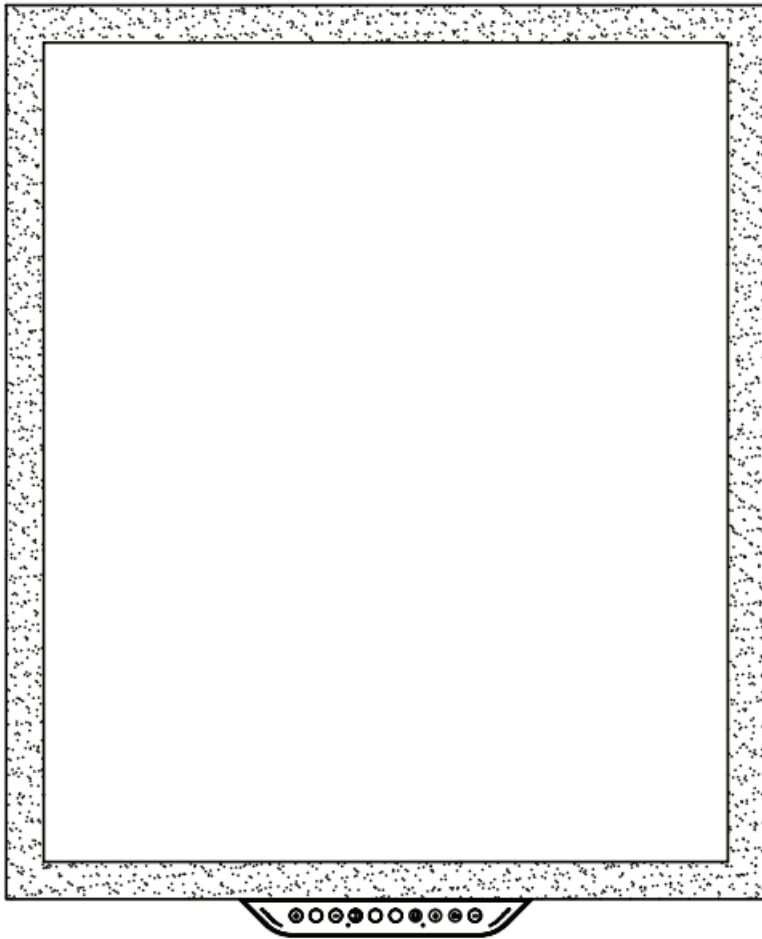

Documents / Resources

 <p>LED MIRROR WITH ALEXA BUILT IN AND BLUETOOTH SPEAKERS</p> <p>PROTECTOR RECEIPT HERE</p> <p>WARRANTY</p> <p>PROTECTOR RECEIPT HERE</p>	<p>HOMEWERKS 75-105-AX LED Mirror with Alexa Built In and Bluetooth Speakers [pdf] Use r Manual</p> <p>75-105-AX, 75-106-AX, 75-107-AX, 75-105-AX LED Mirror with Alexa Built In and Bluetooth Speakers, LED Mirror with Alexa Built In and Bluetooth Speakers, 75-105-AX LED Mirror, LED Mirror, Mirror</p>
--	--

References

- [Amazon.com. Spend less. Smile more.](#)
- [Bathroom and Kitchen Innovations That Keep Your Home Flowing | Homewerks Worldwide](#)
- [HomewerksConnect.com/Mirror](#)
- [poramazon.com](#)
- [Spotify - Connect](#)
- [Amazon Digital Services and Device Support - Amazon Customer Service](#)
- [Amazon Device Warranty - Amazon Customer Service](#)
- [Amazon Device Warranty Provider - Amazon Customer Service](#)