



hp 367-1 Wireless Keyboard User Manual

[Home](#) » [HP](#) » hp 367-1 Wireless Keyboard User Manual 



367-1 Wireless Keyboard User Manual 367-3-US



Contents

[1 Product Parameters Description](#)

[2 Getting Started Guide](#)

[3 Warm Tips:](#)

[4 Bluetooth Connection Steps](#)

[5 2.4G Connection Steps](#)

[6 Trouble Shooting](#)

[7 Cleaning and Maintenance](#)

[8 Package Included](#)

[9 Documents / Resources](#)


[9.1 References](#)

[10 Related Posts](#)

Product Parameters Description

1. Support system: 3-in-1 system (Android, Windows and 10S system)
2. BT Operating Range: Up to 10 meters
3. Work Voltage: 3.0V~4.2V
4. Work Current: <6mAh
5. Standby Current: <1mAh
6. Charging Current: <40uAh
7. Standby Time: >130%
8. Charger Time: 2-3H
9. Work Time: >50H
10. 12.Sleep time: after 10 minutes
11. Keyboard weight: 450g
12. Keyboard Life: 5 million clicks
13. Lithium battery capacity: 500mA
14. Lithium battery life: 3 years
15. Working temperature: -10C°/+55C°

Getting Started Guide

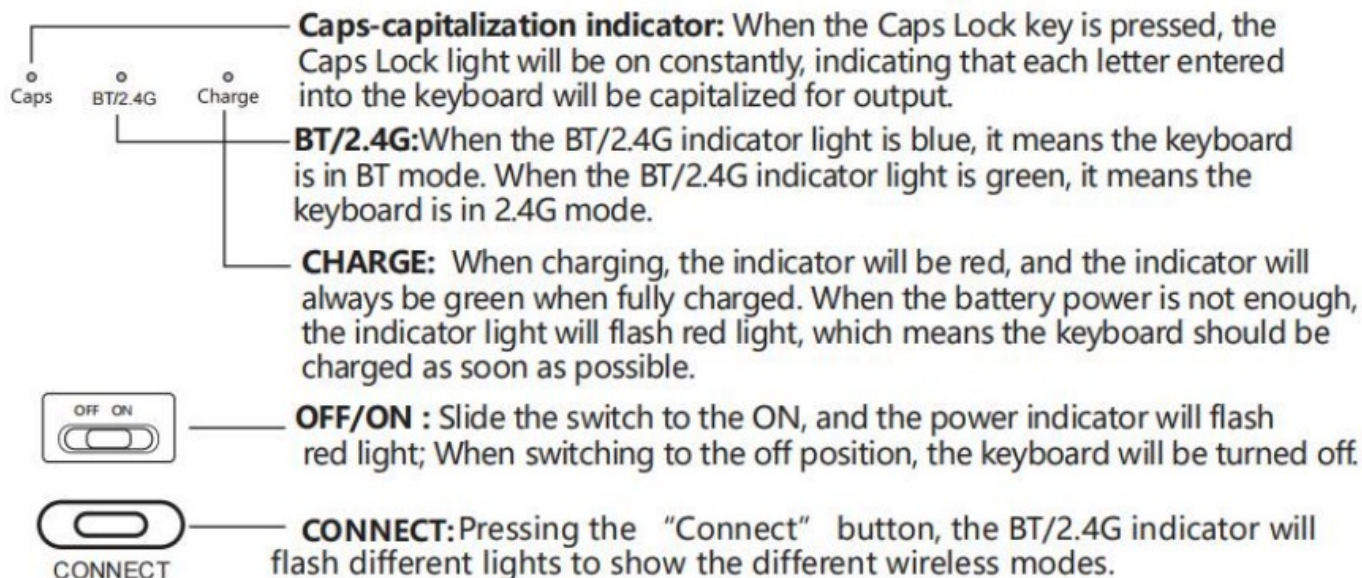

Note: All blue multi-function keys need to press "FN + blue function key" at the same time to achieve (For example, press "Fn" + "Q", the keyboard will switch to iOS system.)

Bluetooth Keyboard Shortcut Keys Function

	ESC		Brightness +		Brightness -
	Search		Print Screen		Virtual keyboard
	Change Language		Prev Track		Play/Pause
	Next Track		Silent Mode		Volume -
	Volume +				

How to switch the appropriate system and language before using the keyboard?

1	FN+	Android	Switch to Android System	Note: when using the keyboard, please adjust to the same system as your device after connecting Bluetooth
2	FN+	Windows	Switch to Windows System	
3	FN+	IOS	Switch to iOS System	
4	Shift+	Space	Switch language in Android System	
5	Ctrl+	Space	Switch language in iOS System	
6	Win+	Space	Switch language in Windows System	
	Shift+	Alt		
		Ctrl		

Warm Tips:

1. Please fully charge the keyboard when first-time used. The charging indicator light becomes green means the power is full.
2. If you are not using the keyboard for a long time, it is recommended to turn off the power to extend the battery life.
3. In order to have a longer battery life of the keyboard, please charge the keyboard in time when the charge indicator flashes red light.

Bluetooth Connection Steps

1. Slide the keyboard switch to ON direction. The Charge indicator flashing red light and then turn off auto.



2. Press the "FN+ [F1/F2/F3/F4/F5/F6/F7/F8/F9/F10/F11/F12] "FN+ ["keys, switch wireless mode to Bluetooth 3.0 or Bluetooth 5.0. The BT/2.4G indicator will flash blue light three times.

3. Press the Connect button, the BT/2.4G indicator will flash blue light all the time.
4. Go to settings interface, enable Bluetooth of your device, it will automatically search for nearby devices



5. Find the "Bluetooth Keyboard 3.0" or "Bluetooth Keyboard 5.0" device. Click connect.



2.4G Connection Steps


1. Plug the USB receiver into your device.



2. Slide the keyboard switch to the ON direction.



The Charge indicator flashes red light and then turns off automaticall.

3. Press the "FN+  to switch the wireless mode to 2.4G. The BT/2.4G indicator will flash green light three times.

4. Press the connect button, and the BT/2.4G indicator will flash a green light. When the keyboard paired to your device successfully, the indicator light will be green and then auto-turn off after several seconds.



5. Typing the keyboard to test whether it connects successfully. If not, please repeat those operations again

Trouble Shooting

1. Make sure the power is turned on.
2. Ensure the keyboard is in range of 10 meters from your device.

3. Make sure the keyboard has enough power.
4. Make sure the Bluetooth is turned on or the USB receiver is plugged in.
5. Make sure the keyboard is paired to your device successfully.
6. If the pairing between keyboard and your device failed, do the following steps:
 - 1) Bluetooth Mode
 - a. Delete all the history Bluetooth devices in your device.
 - b. Shut the Bluetooth in your device.
 - c. Reboot your device and its Bluetooth.
 - d. Reconnect the keyboard with your device.
 - 2) 2.4G Mode
 - a. Pull out the 2.4G receiver from the device.
 - b. Turn off the keyboard and then turn on 2.4G again.
 - c. Insert the 2.4G receiver into your device within 20 seconds when the green light is flashing.
 - d. The green light is always on and then off means that the device is paired successfully. If not, please repeat those operations and pairing again.

Cleaning and Maintenance


Use alcohol or similar volatile nature cleaners to clean the surface of the keyboard stains.

Package Included

Bluetooth + 2.4G wireless keyboard * 1
User manual *1
USB charging cable * 1
2.4G receiver *1



Documents / Resources

	<p>hp 367-1 Wireless Keyboard [pdf] User Manual 367-1 Wireless Keyboard, 367-1, Wireless Keyboard, Keyboard</p>
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)