

HQTELECOM
**HQ-J205-4S Four
Push Button Auto
Dialer Wall Telephone**



HQTelecom HQ-J205-4S Four Push Button Auto Dialer Wall Telephone Owner's Manual

[Home](#) » [HQTelecom](#) » HQTelecom HQ-J205-4S Four Push Button Auto Dialer Wall Telephone Owner's Manual 

Contents

- [1 HQTelecom HQ-J205-4S Four Push Button Auto Dialer Wall Telephone](#)
- [2 FEATURES](#)
- [3 Technical Parameters](#)
- [4 Product Dimensions](#)
- [5 Specifications](#)
- [6 Frequently Asked Questions](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

HQTELECOM

HQTelecom HQ-J205-4S Four Push Button Auto Dialer Wall Telephone



Model: HQ-J205-4S

The HQ-J205-4S is a waterproof telephone with protection class IP54, it is made with Cold Rolled Steel. The communication mode is analog, and IP is also available (contact us). The phone is usually used at airports, bus stations, schools, elevators, pool areas, and any business public areas that require easy access to up to four (4) services, including 911, 411, or any phone number (up to 20 digits).

FEATURES

- Compatible with analog landlines and VOIP.
- Robust housing, constructed of cold rolled steel with powder coated.
- Vandal-proof handset with internal steel lanyard and grommet provides added security for handset cord.
- When the handset is picked up, the phone will dial the hotline number (911 as default) automatically.

IMPORTANT: This phone can be re-programmed to auto-dial up to 4 phone numbers. We can program these numbers for you at the factory at the time of purchase (prior to shipping it). If you wish to change this number later, you will need to purchase a special keypad (model HQ-JWAT – sold separately).

- Magnetic hook switch with reed switch.
- Noise-canceling microphone.
- Easy to install wall mount enclosure style.
- Weatherproof protection IP54.
- Phone line powered (RJ11 plug with patch cable included).
- FCC, CE, RoHS, ISO9001 compliant.
- Multiple colors are available upon request.

- Two (2) years warranty.


PROGRAMMING SPEED DIAL NUMBERS (Equipped with a keypad to set number)

1. Open the front cover of the phone.
2. Locate the red dip-switch box on the main PCB and switch “1” to the ON setting.
3. Take the handset off-hook and check for dial tone.
4. Enter the 1st speed dial number you wish to store. Enter the number exactly as it would normally be dialed from this line/location. (Please Note: Maximum length of each stored speed dial number is 15 digits; # cannot be the leading digit).
5. Once the full speed dial number is entered, press the appropriate speed dial button S1 thru S4 that you wish to associate with the 1st speed dial number.
6. Repeat steps 4 and 5 to program additional speed dial numbers. Ensure that you assign different, unused S1~S4 keys to each new speed dial number being programmed.
7. When you have completed programming the speed dial numbers, switch the “1” switch back to the original position (opposite of ON).

Technical Parameters

Power Supply	Telephone Line Powered
Voltage	DC48V
Standby Work Current	≤1mA
Frequency Response	250~3000 Hz
Ringer Volume	≤80dB(A)
Corrosion Grade	WF1
Ambient Temperature	-40~+70℃
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Anti-vandalism Level	IK09
Installation	Wall-mounted

Product Dimensions

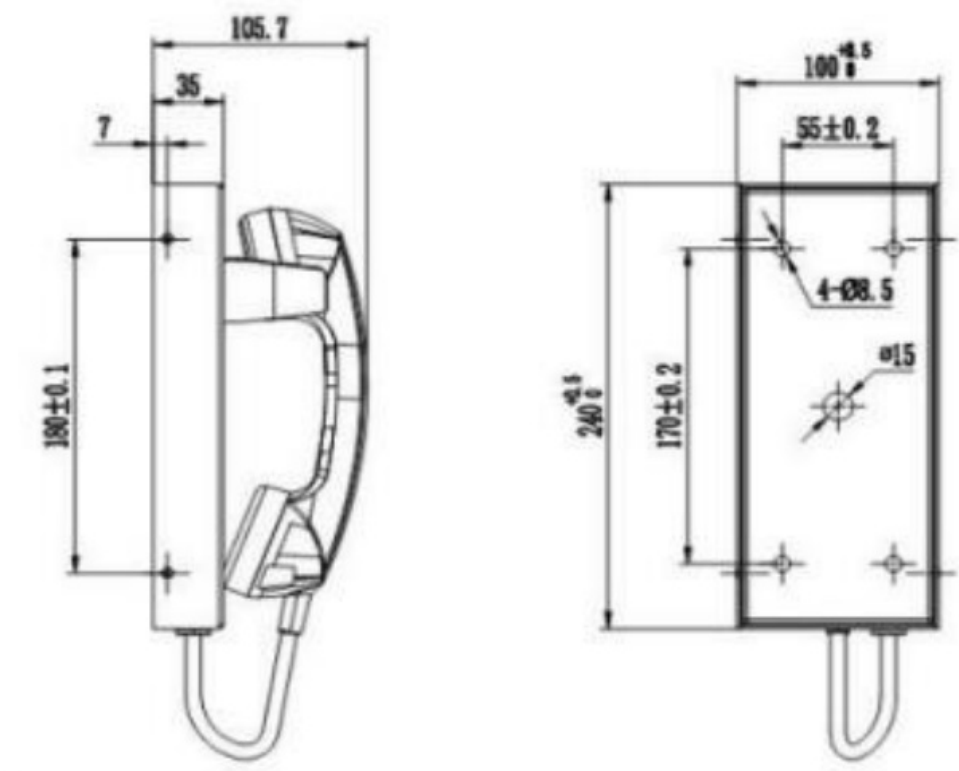

Package

- Unit (mm)
- Carton (mm)
- Packaging materials: Peart cotton, Carton
- Net weight: 1.9 KG
- Gross weight: 2 KG
- For service and support, please visit our website at <https://www.hqtelecom.com>.

Specifications

- **Model:** HQ-J205-4S
- **Material:** Cold Rolled Steel
- **Protection Class:** IP54
- **Communication Mode:** Analogue (IP available upon request)
- **Intended Use:** Airports, bus stations, schools, elevators, pool areas, and other public areas
- **Services:** Up to four (4) services including emergency numbers like 911 and user-defined phone numbers (up to 20 digits)

Frequently Asked Questions

Q: Is the Vandal-Resistant Hotline Wall-mount Phone suitable for outdoor use?

A: Yes, the phone is waterproof with protection class IP54, making it suitable for outdoor environments.


Q: Can I program custom service numbers on the phone?

A: Yes, you can program up to four (4) custom service numbers with a maximum of 20 digits each for quick access.

Q: How do I request IP communication mode for the phone?

A: For IP communication mode availability, please contact our support team through our website at <https://www.hqtelecom.com>.

Documents / Resources

	<p>HQTelecom HQ-J205-4S Four Push Button Auto Dialer Wall Telephone [pdf] Owner's Manual</p> <p>HQ-J205-4S Four Push Button Auto Dialer Wall Telephone, HQ-J205-4S, Four Push Button Auto Dialer Wall Telephone, Button Auto Dialer Wall Telephone, Auto Dialer Wall Telephone, Dialer Wall Telephone, Wall Telephone</p>
---	---

References

- [HQ HQ Telecom: Telephones, UV Lights, Call Blockers & More – HQTELECOM.com](#)
- [HQ HQ Telecom: Telephones, UV Lights, Call Blockers & More – HQTELECOM.com](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.