



i safe M93A01 Android 20.3 cm Octa Core Tablet User Guide


[Home](#) » [i-safe](#) » i safe M93A01 Android 20.3 cm Octa Core Tablet User Guide 

Contents

- [1 i safe M93A01 Android 20.3 cm Octa Core Tablet](#)
- [2 FIRST](#)
- [3 SAFETY](#)
- [4 PREPARATION](#)
- [5 MAINTENANCE/REPAIR](#)
 - [5.1 CLEANING](#)
 - [5.2 STORAGE](#)
 - [5.3 RECYCLING](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)



i safe M93A01 Android 20.3 cm Octa Core Tablet

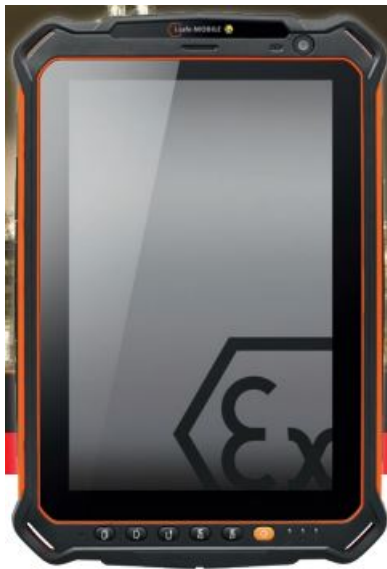

FIRST

This Quick Start Manual contains all the important health and safety instructions for using the device IS930.M1 Mining +GD (Modell M93A01) safely.

1. Read the “Safety” section of this Quick Start Manual carefully before using the device. If you do not follow these instructions or do not understand them, this could lead to death, severe injuries and damage to the device.
2. Read the Operating Manual before using the device. The Operating Manual with detailed information and instructions concerning the device can be found at www.isafe-mobile.com/en/support/downloads
3. Also read the Safety Instructions before using the device. These can be found in the device packaging and at www.isafe-mobile.com/en/support/downloads
4. Follow all instructions given on the device and on the packaging.
5. Follow local safety regulations.

SAFETY

USE IN EXPLOSION HAZARDOUS AREAS

Only use the device in explosion hazardous areas of zones 1, 21, 2, 22, M1 and M2 or outside of explosion hazardous areas. Before entering a explosion hazardous area with the device,

- make sure that only approved accessories are connected to the device, see section “Connecting approved accessories”,
- make sure that no gap can be seen between the two halves of the device,
- make sure the device is not damaged,
- make sure that all the labels on the device are readable, If you use the device in a explosion hazardous area,
- do not connect any accessories to the device,
- do not open any interface cover,
- do not charge the device,
- do not open the device,
- do not damage the device. Switch off the device immediately and leave the explosion hazardous area without

delay if

- malfunctions occur on the device,
- you have damaged the housing of the device,
- you have exposed the device to excessive loads,
- the labels on the device are no longer readable.

USE OUTSIDE OF EXPLOSION HAZARDOUS AREAS

- Do not modify the device structurally.
- Do not expose the device to high temperatures.
- Do not expose the device to strong UV radiation.
- Do not expose the device to processes with high electrical charges. Do not expose the device to aggressive acids or bases.
- Do not use the device in places where its use is prohibited.
- Turn off the device in clinics or other medical facilities.
- Always keep a safety distance of at least 15 cm between the device and a pacemaker or hearing aid. The device can affect the functioning of medical devices such as pacemakers and hearing aids.
- When using the device while driving a motor vehicle, be sure to comply with applicable national laws.

WHEN USING EARPHONES OR HEADSETS:

First set the volume control on the device to 50 % of the maximum volume. Gradually adjust the volume.

DEVICE OVERVIEW (see illustration on page 2)

S OS KEY:

A long press of the SOS key sends an emergency call to a pre-saved emergency number (only in connection with a Lone Worker Protection app).

S D CARD SLOT:

Use for microSD card.

SIM CARD SLOT:

Use for micro-SIM card.

1. **SOS KEY:** A long press of the SOS key sends an emergency call to a pre-saved emergency number (only in connection with a Lone Worker Protection app).
2. **S D CARD SLOT:** Use for microSD card.
3. **SIM CARD SLOT:** Use for the micro-SIM card.
4. **FRONT CAMERA**
5. **LOUDNESS CONTROL:** Volume up/Volume down.
6. **S TATUS LED:** Display for battery and charging status.
7. **POWER KEY:** A long press switches the device on/off. A short press switches the standby mode on/off.
8. **F UNCTION KEY M1:** Optional function (can be assigned via apps used).

9. **F UNCTION KEY M2:** Optional function (can be assigned via apps used).
10. **BACK KEY:** Go to the previous screen.
11. **HOME KEY:** Switch to the main screen.
12. **CURRENT APPLICATION:** This shows all open applications.
13. **USB INTERFACE:** Connection for the i.safe PROTECTOR 2.0 Type C USB Cable or for connection to other devices. Also, see sections “Charging” and “Connecting approved accessories”.
14. **EARPHONE JACK**
15. **MAGNETIC CHARGER PORT:** Connection for the i.safe PROTECTOR 3.0 Magnetic
16. **DOCKING STATION:** Connect to the external docking station.

PREPARATION



Open the IP plug for SIM.

- Insert the SIM card into the slot.
- Open the IP-plug for microSD.
- Insert the microSD card into the slot provided. The device has a slot for a microSD card up to 128 GB. The slot is marked “microSD”.
- Close the IP-plug.

SWITCHING ON

- Press and hold the on/off key for about 3 seconds.
- When turning on the device for the first time, follow the instructions on the screen.
- Enter the device or SIM PIN when the input dialog for the device or SIM PIN appears after switching on.

CHARGING

- Only charge the device outside of explosion hazardous areas.
- Do not charge the device in the vicinity of flammable substances.
- Only charge the device using the i.safe PROTECTOR 2.0 Type C USB Cable supplied or with the i.safe PROTECTOR 3.0 Magnetic Charger Cable supplied.
- Only charge the device at ambient temperatures between +5 °C to +35 °C (+41 °F to +95 °F). Charge the device under dry indoor conditions only.
- Do not charge the device in environments dusty or humid.

- Connect the adapter suitable for your country to the power supply unit.
- Connect the i.safe PROTECTOR 2.0 Type C USB Cable or the i.safe PROTECTOR 3.0 Magnetic Charger Cable to the power supply unit.
- Connect the i.safe PROTECTOR 2.0 Type C USB Cable to the USB interface of the device, or connect the i.safe PROTECTOR 3.0 Magnetic Charger Cable to the magnetic charging port on the device.

CONNECTING APPROVED ACCESSORIES

- Only connect accessories approved by i.safe MOBILE to the device. Accessories approved by i.safe MOBILE can be found at www.isafe-mobile.com/en/products.
- Only use USB interface outside of explosion hazardous areas.
- Under no circumstances should you open the cover of the USB interface in explosion hazardous areas.

Approved accessories can be connected to the USB interface. The USB interface is used for charging and data transfer.

- Connect approved accessories or other devices to the USB interface only by using the i.safe PROTECTOR 2.0 Type C USB Cable.

MAINTENANCE/REPAIR

Contact the i.safe MOBILE repair service at www.isafe-mobile.com/en/support/service if the device is not working normally, if the device needs to be repaired or if a replacement part is required.

RETURN SHIPMENT

Contact the i.safe MOBILE repair service at www.isafe-mobile.com/en/support/service.

CLEANING

- Turn off the device before cleaning.
- Do not charge the device while cleaning.
- Do not use chemical agents for cleaning.
- Clean the device and the Power Adapter with a soft, moistened antistatic cloth.
- Clean the display screen regularly with a soft, antistatic cloth.

STORAGE

- Store the device at ambient temperatures between +5 °C to +35 °C (+41 °F to +95 °F) and a humidity between 10 % to 60 %.

RECYCLING


- DO NOT throw away batteries with household waste.
- Always dispose electronic products, batteries and packaging material at the appropriate collection points. This way, you prevent uncontrolled waste disposal and promote the recycling of material resources.

You can obtain further information from regional waste disposal companies, state authorities or the i.safe MOBILE service centre responsible for your country or region at www.isafe-mobile.com/en/support/service.

TRADEMARKS

i.safe MOBILE and the i.safe MOBILE logo are registered trademarks of the i.safe MOBILE GmbH. EEA Version: Comes with the Google™ app and Google Chrome™ Google and Google Play are trademarks of Google LLC. All other trademarks and copyrights are the properties of their respective owners.

Documents / Resources

	<p>i safe M93A01 Android 20.3 cm Octa Core Tablet [pdf] User Guide M93A01, Android 20.3 cm Octa Core Tablet, M93A01 Android 20.3 cm Octa Core Tablet, IS930. M1 MINING GD</p>
---	---