



Installation Diagram



Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.

- 1.Remove fixture from its original package.
- 2.Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2f)
- 3.Attach mounting plate (1c) to electrical junction box (1a) using screws provided (1d) in hardware package
- 4.To change fixture height, push and hold wire gripper (2g), slide wire to desired length and then release wire gripper (2g) to secure (Remove excess wire if necessary)
- 5.Secure mounting plate (1c) to mounting surface with anchors (1f) and screws (1e)
- 6.Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- 7.Attach canopy(2a) to mounting plate(1c) with canopy screws(2f) and nuts(2c) , tighten them(2f and 2c).
- 8.Fine tune wire length if necessary, by push and hold wire gripper (2g) and then adjust wire to desired length

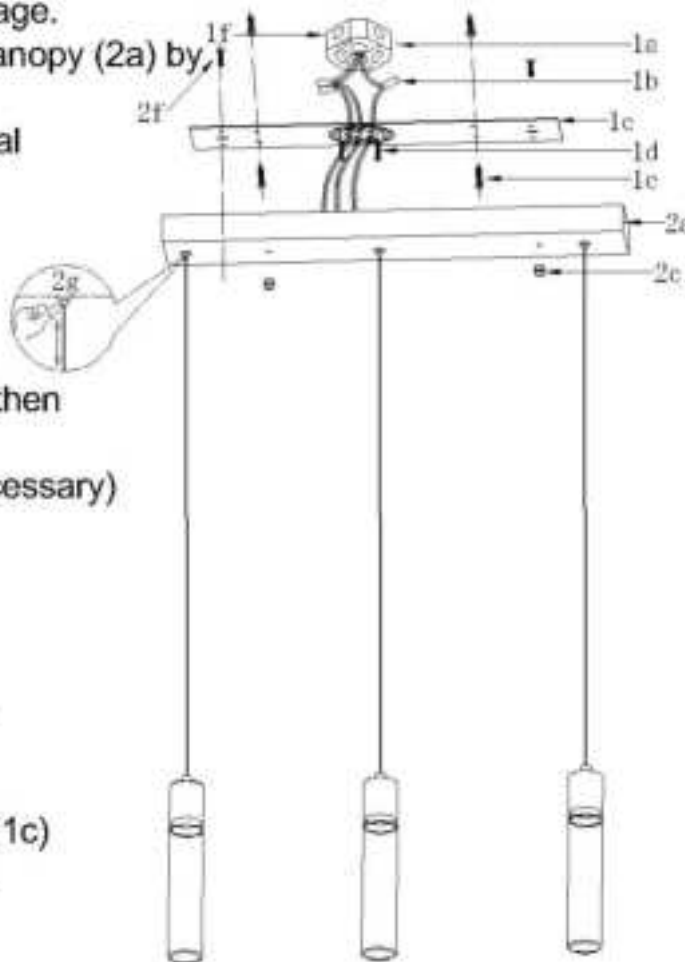

- 1.To shorten the cable-just push the cable up,cable will be locked Automatically.
- 2.To length the cable-lift up on the cable and push up on the lock while keep the lock depressed,lower the cable to the desired length,release the lock to set.

