



iclever IC-GK08 Keyboard and Mouse Combo User Manual

[Home](#) » [iclever](#) » iclever IC-GK08 Keyboard and Mouse Combo User Manual 

Contents

- [1 iclever IC-GK08 Keyboard and Mouse Combo](#)
- [2 Package Contents](#)
- [3 Specification of Keyboard](#)
- [4 Product overview](#)
- [5 Keys and Functions](#)
- [6 Special gray keys for Mac OS Users](#)
- [7 Pairing Instructions](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)



iclever IC-GK08 Keyboard and Mouse Combo



Package Contents

- 1 x 2.4G Keyboard
- 1 x 2.4G Mouse
- 1 x USB Charging Cable
- 1 x 2.4G USB Receiver (stored in the back of mouse)
- 1 x Keyboard Cover
- 1 x User Manual

Specification of Keyboard

Dimensions	438.5 x 129 x 18.61mm / 17.26 x 5.08 x 0.73 in
Operating Range	< 10 m / 32.8 ft
Charge Time	< 2 hours
Uninterrupted Work Time	90 hours
Lithium Battery Capacity	280 mAh
Key Life	3 million clicks
Standby Time	90 days

- **Frequency band:** 2402 MHz~ 2480 MHz
- **Maximum transmission power:** 0 dBm


Specification of Mouse




Dimensions	107.5 x 60 x 27.5 mm / 4.23 x 2.36 x 1.08 in
Operating Range	< 10 m / 32.8 ft
Power Source	2 x AAA Batteries (not included)
Uninterrupted Work Time	160 days
Button Life	3 million clicks
DPI	800-1200-1600

- **Frequency band:** 2405 MHz – 2470 MHz
- **Maximum transmission power:** 0 dBm


Product overview

Keyboard:

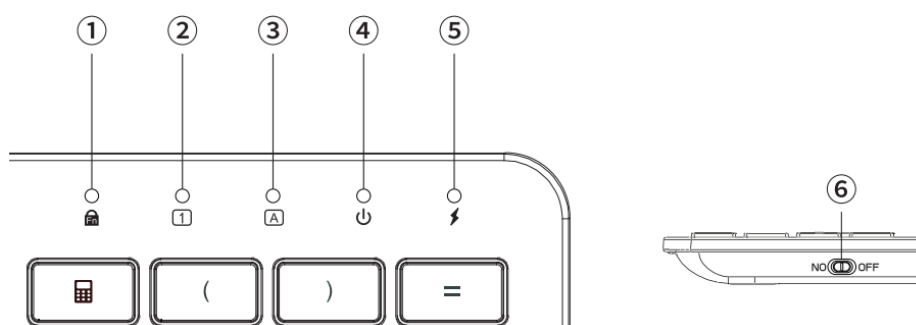

1. **Fn Lock Indicator:** Press  key to activate Fn lock function, and Fn Lock indicator will turn to be blue.
With the activation of Fn lock, shortcut keys on F1-F12 are able to press directly without pressing Fn key.
2. **Numeric Indicator:** The numeric indicator will be green when NumLock is activated.
3. **Caps Lock Indicator:** The caps lock indicator will be green when caps lock is activated.
4. **Power Indicator:** The indicator will be on for 3s when keyboard is on. Pressing  +  keys, power indicator will flash. Each flash represents 25% battery power, 4 flashes in total.
5. **Charging indicator:** Stay in red when charging, and it will be off after fully charged.
6. **Power Switch:** Move the switch to ON/OFF to turn on/off the keyboard.

Mouse:

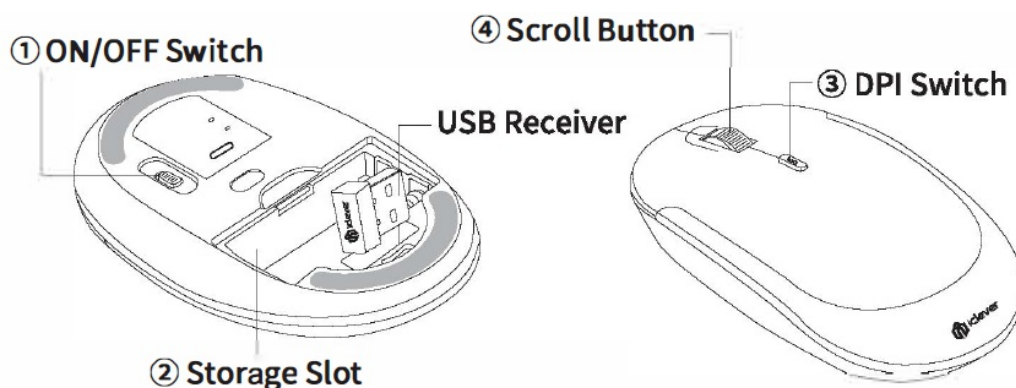













1. **ON/OFF Switch:** Turn on/off the mouse.
2. **Storage Slot:** The place to insert two AAA batteries(not included) and store the USB receiver (USB Receiver is stored in here).
3. **DPI Switch:** 3 adjustable dpi (800, 1200, 1600) are available. Press DPI Switch to change.
4. **Scroll Button:** For scrolling.





Sleep Mode





The keyboard and mouse will enter sleep mode if idle for 10 minutes. Press any key and wait for 3s to exit sleep mode.

Keys and Functions

The table below describes special key combinations for Windows and Mac OS. For all the media keys to work as normal, please press 'fn' + 'Q' or 'fn' + 'W' to choose right system.
('fn' + 'Q' is for Mac OS, and 'fn' + 'W' is for Windows)

Key Icon	Windows	Fn on Windows	Mac OS	Fn on Mac OS
Way to use	Press F1~F12 directly	Press Fn+ F1~F12	Press F1~F12 directly	Press Fn+ F1~F12
	F1	Brightness - (Win 10)	F1	Brightness -
	F2	Brightness + (Win 10)	F2	Brightness +
	F3	Web browser	F3	Mission Control
	F4	Switch Apps	F4	Switch apps
	F5	Search	F5	Search
	F6	Battery checking	F6	Battery checking
	F7	Previous track	F7	Previous track
	F8	Play/pause	F8	Play/pause
	F9	Next track	F9	Next track
	F10	Mute	F10	Mute
	F11	Volume -	F11	Volume -
	F12	Volume +	F12	Volume +

Special Keys	Descriptions
	Your keyboard has by default direct access to F-keys (F1~F12) If you prefer to have direct access to media and hotkeys such as as mute, volume up, play/pause and so on, simply press this key to swap them.
	Press keys of “fn”+ “Q”, the keyboard layout will be swapped to Mac OS.
	Press keys of “fn”+ “W”, the keyboard layout will be swapped to Windows.
	The key will works as “win” when your system is swapped to Windows; the key will works as “option” when your system is swapped to Mac OS.

	The key will work as “alt” when your system is swapped to Windows; the key will work as “command” when your system is swapped to Mac OS.
	The key will work as “number lock” when your system is swapped to Windows; the key will work as “clear” when your system is swapped to Mac OS.
	This key will work as menu function that is similar to right click of mouse when your system is swapped to Windows. Note: this function is not working for Mac OS.
	This key will work as calculator when your system is swapped to Windows. Note: this function is not working for Mac OS.



















Keyboard Shortcuts




Shortcuts Select all	Window Ctrl+A	Mac OS cmd+A
Copy	Ctrl+C	cmd+C
Cut	Ctrl +X	cmd+X
Paste	Ctrl +V	cmd+V

Special gray keys for Mac OS Users

Before using, please ensure

- You already press “Fn” + “Q” keys to switch to Mac OS.
- The input method has been changed to British (not British-PC)


Special gray key	Mac OS	Gray Key	Mac OS
	§	 + 	¢
 + 	±		\
 + 	@	 + 	
 + 	€	 + 	⌘
 + 	#	 + 	⌘

Note:  , means to click this key directly; and  +  , means to press these two keys simultaneously.

Pairing Instructions

For Windows users

- **Step 1.** Charge the keyboard for 2 hours.
- **Step 2.** Remove the USB Receiver from the bottom of mouse and insert two AAA batteries into the slot (AAA batteries are not included).

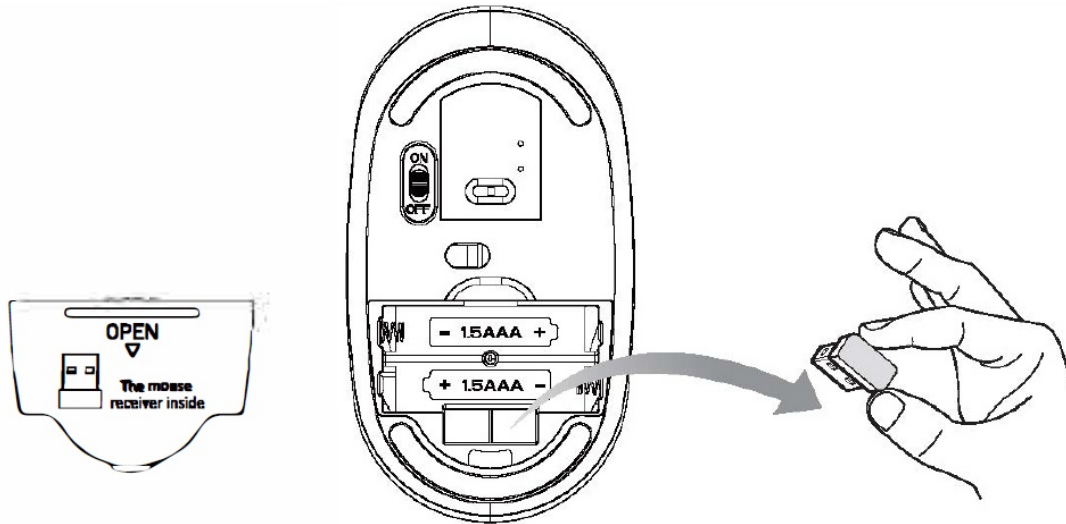

- **Step 3.** Move the mouse ON/OFF Switch to “ON” to power on.
- **Step 4.** Plug the USB Receiver into the USB-A port of the computer.
- **Step 5.** Move the keyboard power switch to “ON” to power on.
- **Step 6.** Press “Fn” + “W” to switch to Windows system.
- **Step 7.** Done, ready to use.

For Mac OS users:

- **Step 1.** Charge the keyboard for 2 hours.
- **Step 2.** Remove the USB Receiver from the bottom of mouse and insert two AAA batteries into the slot (AAA batteries are not Included).
- **Step 3.** Move the mouse ON/OFF Switch to “ON” to power on.
- **Step 4.** Plug the USB Receiver into the USB-A port of the computer or a hub.
- **NOTE:** if your Mac is USB-C port please connect it by a hub-
- **Step 5.** Move the keyboard power switch to “ON” to power on.
- **Step 6.** Press “Fn” + “Q” to switch to Mac OS (MacBook I iMac).
- **Step 7.** Done, ready to use.

If fail to connect, please read FAQ, and follow as below:

A. Keyboard re-pairing:

- **Step 1.** Plug out the 2.4G USB receiver. Turn on the keyboard.
- **Step 2.** Press “Esc” + “Q” keys simultaneously; the indicator will flash green quickly.
- **Step 3.** Immediately plug the 2.4G USB receiver into the computer within 10s and keep the keyboard close to

the receiver within 30cm (0.98 ft).

- **Step 4.** With connected successfully, the power indicator will flash green for 3 times then to be off.

Note : Keep the keyboard off the ground.

B. Mouse re-pairing

- **Step 1.** Plug out the 2.4G USB receiver and turn off the mouse.
- **Step 2.** Holding “mouse right key” and “scroll button” for 5s and turn on the mouse (keep holding “mouse right key” and “Scroll Button” before finishing step 3).
- **Step 3.** Immediately insert the receiver into the computer within 10s and keep the mouse close to the receiver within 30cm (0.98 ft).
- **Step 4.** Move the mouse to test.

Note: If failed, please repeat above steps again.

Device Requirements

Windows XP/Vista/7/8/10, and Mac OS 10.14.6 or above with USB-A port.

Note

1. The keyboard is not fully compatible with Mac mini, smart TV, and Xbox.
2. If your Mac is USB-C port, please try to connect it by a hub, extender or something similar.

Charge the Device

If your mouse stop working, please try to change new two AAA batteries. If your keyboard stop working, please charge the keyboard by included charging cable to PC/laptop USB port directly.

Note

- **Keyboard output:** DC 5V/200mA; USB charger is not included.
- In the charging process, the indicator will light up red, and it will be off after fully charged. Generally, it takes about 2 hours to get fully charged.

Tips







- Keep away from oil, chemical, liquid, and snacks.
- Keep away from sharp objects.
- Keep away from metal and other sources of the wireless signal.

Contact

Email: support@iclever.com

FAQ

Q. Is this keyboard fully compatible with MacBook and iMac?

No, it is not fully compatible. The keys of       are not working for MacBook and iMac. In addition, if your device is MacBook with USB-C port, please try to connect the USB receiver by a hub, extender or something similar.

How to Fix Keyboard Typing Multiple Letters on Windows.

How to Fix Keyboard Typing Multiple Letters on Mac.

On a Mac, choose the Apple menu> System Preferences, click Keyboard , and choose the Keyboard tab. Locate the Key Repeat' slider setting and adjust it to the Off position.

Cursor does not follow mouse movements.

Use a mouse pad. Avoid using your mouse on: Glass and other see-through surfaces, Reflective surfaces, such as mirrors and metal desks, and Wood grains and grooved surfaces. Try the mouse on a piece of white paper to make sure it isn't a tracking issue on the particular surface you're using.

Miss the USB Receiver.

The USB Receiver is located in the bottom of mouse storage compartment. Please open the cover to get the USB Receiver. Only one USB Receiver is included and both works for keyboard and mouse.

Hereby, Thousand shores Deutschland GmbH] declares that the radio equipment type [2.4G Keyboard and 2.4G Mouse, IC-GK08] is in compliance with Directive 2014/53/EU.


The full text of the EU declaration conformity is available at the following internet address:

<http://files.iclever.com/ic-gk08-uk-doc.pdf>

Learn more about the UK Declaration of Conformity, please visit the following website:

<http://files.iclever.com/gk08-uk-doc.pdf>

Documents / Resources

	iclever IC-GK08 Keyboard and Mouse Combo [pdf] User Manual IC-GK08 Keyboard and Mouse Combo, IC-GK08, Keyboard and Mouse Combo, Mouse Combo , Combo
---	--

References

- [User Manual](#)