



iGear Spectrum Portable Bluetooth Party Speaker User Manual

[Home](#) » [iGear](#) » iGear Spectrum Portable Bluetooth Party Speaker User Manual 

Contents

- [1 iGear Spectrum Portable Bluetooth Party Speaker](#)
- [2 Technical specification](#)
- [3 Features](#)
- [4 Keys to Operation](#)
- [5 Directions to use](#)
- [6 Troubleshooting](#)
- [7 Warranty](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)



iGear Spectrum Portable Bluetooth Party Speaker




Technical specification

- Bluetooth version: 5.0
- Transmission distance: 70 meters
- Output power: 12W X 2
- Playing time: up to 18 hours (at 50% volume)
- Frequency effect: 80Hz-75Khz
- Speaker: 66mm
- Input power: DC 5V
- Battery type: 4000mAh
- Audio input: 3.5mm headphone jack (stereo)

Features

1. Bluetooth connection
2. Memory function, breakpoint resuming
3. Support USB/rF card/AUX playback mode
4. Built-in lithium-ion battery
5. Supports MP3/WAV/WMA/FLAC music format
6. IPX5 Splash proof
7. TWS (True Wireless Stereo) system
8. FM Radio
9. 780-degree dazzle light
10. High fidelity speakers

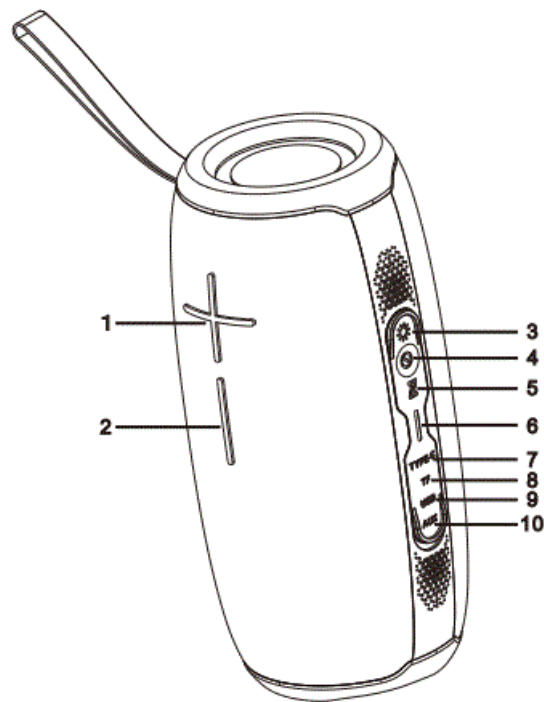

iGear Spectrum button guide

Keys to Operation

1. **Volume up button:** Press once to increase the Volume/Long press for the next song.
2. **Volume down button:** Press once to decrease the Volume/Long press for the previous song.
3. **Dazzle Light button**
Long press to turn ON/OFF the light mode. Short press to switch between different light modes.
Double-click to disconnect/reconnect the Bluetooth connection.
4. **Power Button**
Long press to turn ON/OFF the speaker Single click to Play/Pause the song.
5. **TWS Button/Mode Button**
Single click to connect/disconnect two “iGear Spectrum” speakers simultaneously Long press to switch modes
Double-click in Bluetooth Mode to redial; Short-press to answer/hang up a call.
In case of an incoming call, long press for 2 seconds to reject the incoming call.
6. **LED Indicator**
The LED indicator flashes continuously while waiting for the speaker to be paired. Once the connection is successful, the LED indicator will stop flashing and will stay ON.
7. Type-C Charging Port
8. TF card slot
9. USB drive slot
10. **AUXJack**
When using the radio, you need to insert the AUX cable as a radio antenna.

Directions to use

1. Bluetooth pairing
Turn on the Bluetooth on your device, search for “iGear Spectrum”, connect and pair. After a successful

connection, start playing your desired music.

2. TWS mode

Turn on two “iGear Spectrum” speakers at the same time, short press the TWS button on one of the speakers once you hear a beep, the speaker enters into the TWS mode, there will be a prompt when the pairing is successful. After the pairing is successful, the LED indicator of the main speaker flashes and the LED indicator of the secondary speaker will stay on.

3. Mode switching

The speaker enters Bluetooth mode by default when it is turned on. To switch modes long press the TWS button

The sequence of mode switching is as follows:

1. Bluetooth mode
2. TF card mode
3. USB mode
4. AUX mode.

4. Battery Percentage

There are 4 LEDs in the LED indicator that shows the battery percentage of the speaker 4 LEDs flashing equals to 100%, 3 LEDs flashing equals to 75%, 2 LEDs flashing equals to 50% and 1 LED flashing equals to 25% battery

Troubleshooting

1. Auto shutdown: When the battery power is low, the battery saver function will turn on automatically, please charge it for 4 hours before use.
2. If there is no sound when connected to the computer: the computer interface is connected incorrectly, please select the correct audio output port
3. If there is no response from the keys when pressed: try restarting the speaker
4. If the speaker has an abnormality, you can short-press the light mode button twice to reset it.

Warranty

Warranty period: 1 Year

In case of consumer complaints: Customer care – +97 9372667793 Email: sales@igear.asia
(Between 10am to 5pm, Mon-Fri) www.igear.asia

Documents / Resources



[iGear Spectrum Portable Bluetooth Party Speaker](#) [pdf] User Manual
Spectrum Portable Bluetooth Party Speaker, Spectrum, Portable Bluetooth Party Speaker, Bluetooth Party Speaker, Party Speaker, Speaker