


## IMMAX 07572L New Smart Controller User Manual

[Home](#) » [imax](#) » IMMAX 07572L New Smart Controller User Manual 

### IMMAX 07572L New Smart Controller

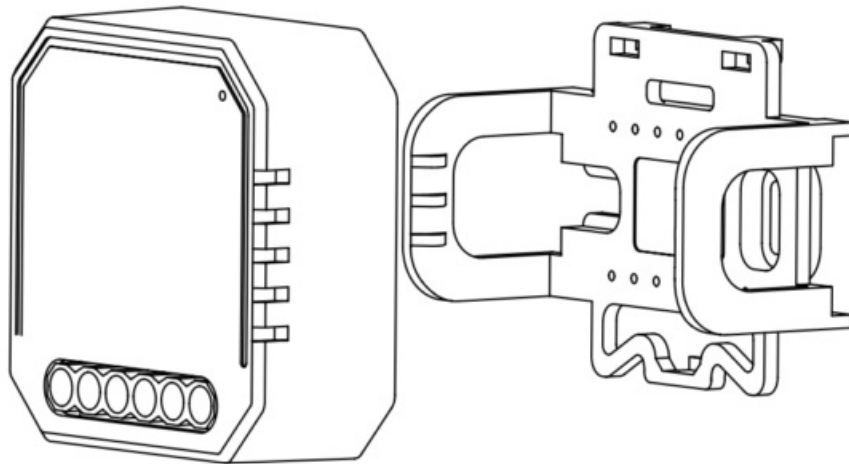

## Contents

- 1 TECHNICAL SPECIFICATIONS
- 2 SAFETY NOTICE
- 3 INSTALLATION AND WIRING DIAGRAM
- 4 CONTROL YOUR HOME FROM ANYWHERE
- 5 PAIRING THE PRODUCT TO THE APPLICATION
- 6 RESET THE DEVICE
- 7 SAFETY INFORMATION
- 8 MAINTENANCE
- 9 Customer Support
- 10 Documents / Resources
  - 10.1 References

## TECHNICAL SPECIFICATIONS

**Note:** Without connecting the Neutral wire (N)

**Min. consumption behind the controller:** 10W

**Protocol:** ZigBee 3.0

**Frequency:** 2400MHz~2483.5MHz

**Maximum RF output power:** ZigBee: 10 dBm – max 19 dBm

**Zigbee repeater:** No

**Network standby power (Pnet):** 0.4W

**Input power:** AC 120 – 240 50 Hz / 60 Hz.

**Load range:** 2x 10 – 100W

**Thermal fuse, protection against overheating:** Yes

**Current fuse, protection against overvoltage and overload:** Yes

**Communication protocol:** Zigbee, support Tuya.

**Wireless range:** 30 m line of sight, 10 m in built-up space

**Operating temperature:** -10°C to 40°C.

**Operating humidity:** 20% – 80%.

**Dimensions:** 3.92 x 3.92 x 1.8 cm (without holder)

**Degree of protection:** IP20

**Package contents:** Smart controller, user manual

## SAFETY NOTICE


Failure to follow the recommendations can be dangerous or cause a violation of the law.

The manufacturer, importer, distributor and/or dealer will not be liable for any loss or damage resulting from failure to follow the instructions in this manual.


1. Risk of electric shock. The main circuit breaker or fuse must be switched off during installation.
2. Only a licensed electrician may install the equipment.
3. Place the equipment out of the reach of children.
4. The equipment must be located away from water, excessive moisture or heat.
5. Do not install the device near a source of strong electromagnetic radiation. Interference and malfunction could occur.
6. Do not attempt to repair, modify or disassemble the equipment. Electrical shock and consequential damage to equipment and property could result.

## INSTALLATION AND WIRING DIAGRAM


## Two Way Single Control

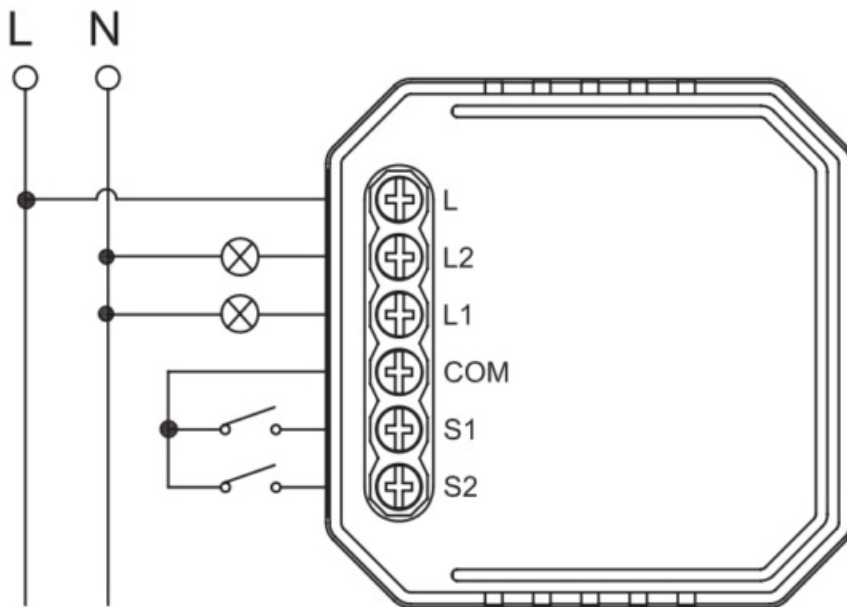

## Without Switch

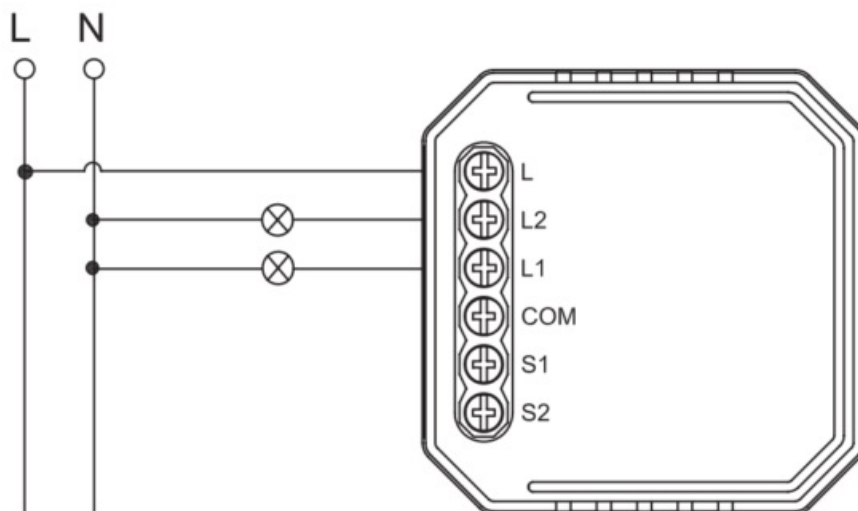


## Two Way Double Switch

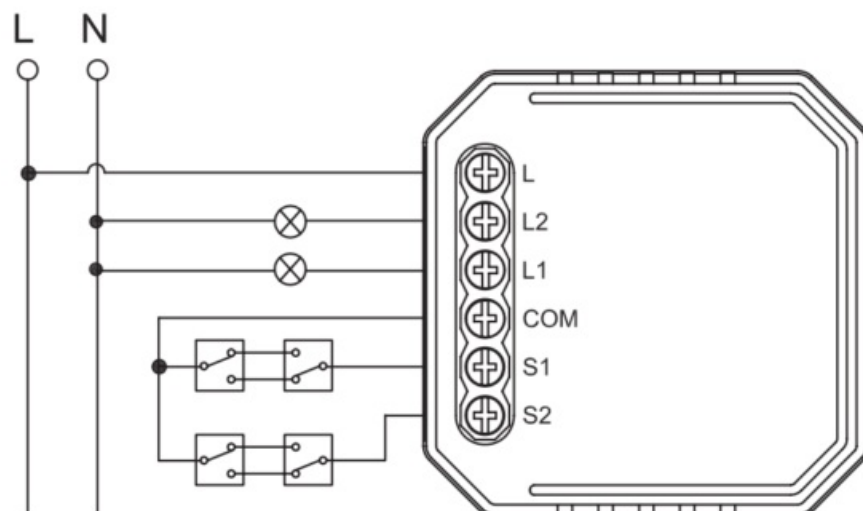

- Switch off the power supply before installation
- Connect the wires according to the diagram
- Insert the module back into the wiring box
- Switch on the power supply and proceed to install the device in Immax NEO PRO

## CONTROL YOUR HOME FROM ANYWHERE

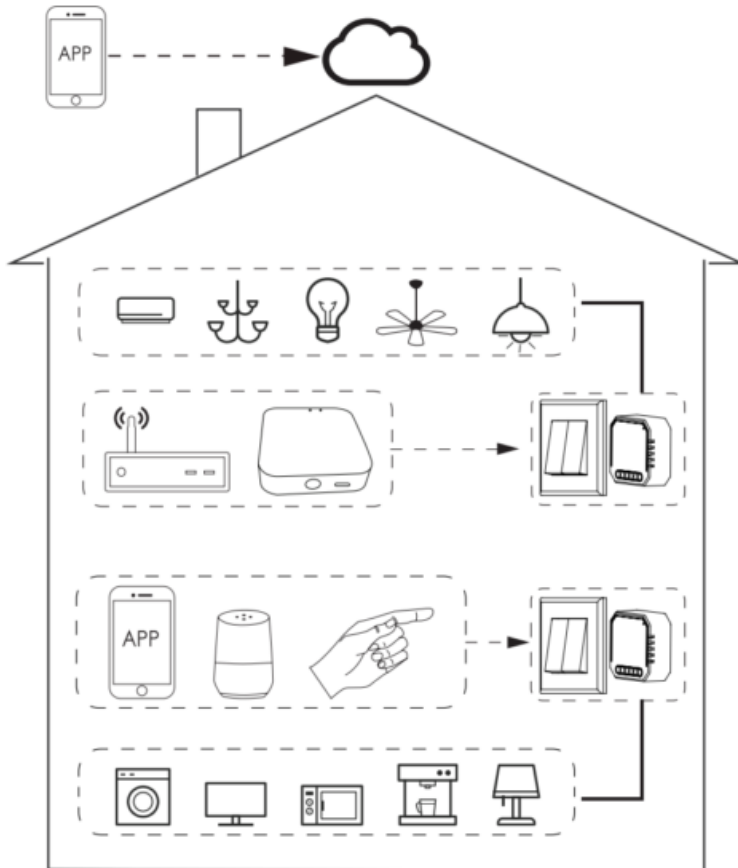

## DOWNLOAD IMMAX NEO PRO AND REGISTER

Scan the QR code and download the Immax NEO PRO app.



Or search for and install the Immax NEO PRO app in the App Store or Google Play

- Launch the Immax NEO PRO app and tap “Register” to create your own account.
- Once you have completed registration, log in with your account.

## PAIRING THE PRODUCT TO THE APPLICATION

Preparation: make sure your mobile phone and the Immax NEO PRO smart gateway are connected to the internet.

Turn on the Immax NEO product, the LED should flash quickly. If not, reset the device.

Open the Immax NEO PRO app, click on the "Room" icon. Then click on the "+" icon to add a new device. In the left column, select the Immax NEO category. Select the device from the available products. Select the smart gateway you want to pair this device with (note: this is necessary if you have more than one smart gateway Click on the "Next step" icon. Confirm that the LED is flashing. Click on the "Next Step" icon. Wait until the device is properly paired with the Immax NEO PRO smart gateway.

Enter the device name. Select the room where you want the device to be located. Click on "Done."

## RESET THE DEVICE

- Long press the button on the controller for more than 10 seconds. The LED will flash rapidly or an audible alert will sound – the device is reset
- Switch the device off and on 5 times with the wall switch. The interval between switching off and on should be 1-2 seconds. After 5 power-ups the LED will flash rapidly or an audible alert will sound – the device is reset.

## SAFETY INFORMATION

**CAUTION:** Keep out of reach of children. This product contains small parts, which may cause suffocation or injury if swallowed.

**WARNING:** Every battery has the potential to leak harmful chemicals that can damage skin, clothing or area where the battery is stored. To avoid the risk of injury, do not allow any substance from the battery to come into contact with the eyes or skin. Every battery may burst or even explode if exposed to fire or other forms of excessive heat. Take care when handling the batteries. To reduce the risk of injury from mishandling the batteries, take the following precautions:

- Do not use different brands and types of batteries in the same device
- When replacing the batteries, always replace all the batteries in the device
- Do not use rechargeable or reusable batteries.
- Do not allow children to insert batteries without supervision.
- Follow the battery manufacturer's instructions for proper battery handling and disposal.

**CAUTION:** The product and batteries should be disposed of at a recycling centre. Do not dispose of them with normal household waste.

**CAUTION:** To ensure safe use of the product, wires must be brought at the installation site according to valid regulations. The installation must only be carried out by an individual with the appropriate certification in the field of electronics. During installation or when a fault is detected, the power cable must always be disconnected from the socket (in the case of direct connection, the relevant circuit breaker must be switched off). Improper installation can damage the product and cause injury.

**CAUTION:** Do not disassemble the product, electric shock may occur.

**CAUTION:** Use only the original power adapter provided with the product. Do not operate the device if the power cord shows signs of damage.

**CAUTION:** Follow the instructions in the enclosed manual.

## MAINTENANCE

Protect the device from contamination and soiling. Wipe the device with a soft cloth, do not use rough or coarse

materials.

DO NOT USE solvents or other aggressive cleaners or chemicals.

A Declaration of Conformity has been issued for this product. More information can be found at [www.immax.cz](http://www.immax.cz)

## Customer Support

Safety information for this product can be downloaded from [www.immax.eu](http://www.immax.eu).

A Declaration of Conformity has been issued for this product, more information can be found at [www.immax.eu](http://www.immax.eu)

If you have a question or need advice, contact us at [support@immax.eu](mailto:support@immax.eu)

Manufacturer and importer:


EU | [www.immaxneo.cz](http://www.immaxneo.cz) | [www.immaxneo.com](http://www.immaxneo.com)

Designed in Czech Republic, Made in China

IMMAX NEO SMART CONTROLLER (L) V8 2-BUTTON ZIGBEE 3.0



## Documents / Resources



[IMMAX 07572L New Smart Controller](#) [pdf] User Manual

07572L, 07572L New Smart Controller, 07572L, New Smart Controller, Smart Controller, Controller

## References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.