



imperii Digital Power Programmer Instruction Manual

[Home](#) » [imperii electronics](#) » imperii Digital Power Programmer Instruction Manual 

imperii Digital Power Programmer Instruction Manual



Contents

1 INSTRUCTION MANUAL

2 Initial Setup

3 Set the Digital Clock

4 Daylight Saving Time

5 Set the Timer

6 Random Function

7 Manual Operation

8 Special Technical Data

9 Package Contents

10 Limited Warranty

11 Related Posts

INSTRUCTION MANUAL

24/7 DAYS DIGITAL TIMER WITH RANDOM AND SUMMER TIME


This device is a plug-in timer switch designed to control the electric power to household appliances to save energy. It has a built-in battery to operate the clock and help you set the timer. Before operation, please plug the unit into an outlet to recharge for about 5 ,...__, 10 minutes if the device is out of charge and shows nothing on the display.

Features

- Alternative 12 /24 hour system
- Easily switch between Standard time and Summer time (DST)
- Up to 10 times on/off setting per day
- Time setting includes HOUR, MINUTE and DAY
- Manual override feature to set the timer switch to always on or off
- Random setting to have your lights to go on and off at random times during vacation

Initial Setup

1. Use a paper clip to press the RESET' button to clear all settings. The LCD will display information as shown in 'Figure 1 'and automatically enter the 'Clock Mode' as shown in 'Figure 2';
2. Then you can move to the next step.

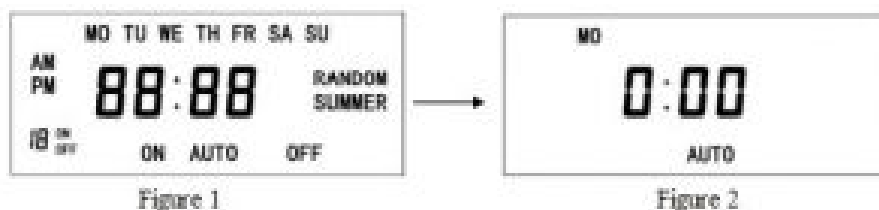

Set the Digital Clock

When in the Clock Mode

1. LCD shows day, hour and minute.
2. To adjust the Day, simultaneously press the 'CLOCK' and the 'WEEK' button;
3. To adjust the hour, simultaneously press the 'CLOCK' and the 'HOUR' button;
4. To adjust the minute, simultaneously press the 'CLOCK' and the 'MINUTE' button;
5. To switch between 12hour/24hour mode, simultaneously press the 'CLOCK' and the 'TIMER' button.

Daylight Saving Time

To switch between Standard Time and Daylight Saving Time (DST), press and hold the 'CLOCK' button, and then press the 'ON/AUTO/OFF' button. There will be a 'SUMMER' on the LCD.

Set the Timer

Press the 'TIMER' button to enter the setting mode:

1. Press the 'WEEK' button to choose the group of days you wish to switch the appliance on.
The group will advance in the sequence of MO-+TU-+WE-+TH-+FR-+SA-+SU-+ MOU WE TH FR SA SU —
+MO TU WE TH FR —+SA SU —IMO TU WE TH FR SA —+
MO WE FR—+TU TH SA—+MO TU WE—+TH FR SA—+MO WE FR SU.
2. Press the 'HOUR' button to adjust the hour;
3. Press the 'MINUTE' button to adjust the minute;
4. Press the 'RES/RCL' button to delete/restore the most recent settings;
5. Press the 'TIMER' button to advance to the next on/off setting position. Repeat steps 4.1 – 4.4.

Please Note:

- Setting mode will exit if no button is pressed within 30 seconds. You can also press the 'CLOCK' button to exit the setting mode.
- Pressing the button HOUR, MINUTE or TIMER for more than 3 seconds will advance the settings at an accelerated rate.

Random Function

1. Press the 'RANDOM' button, the LCD display will display 'RANDOM', indicating that the RANDOM function is in effect from 6:00PM to 6:00AM.
2. To cancel the RANDOM function simply press the 'RANDOM' button again and the 'RANDOM' indicator will disappear.

Manual Operation

When the LCD displays as follows:

- AUTO: The unit will operate as per the settings
- ON: The unit will be set to always ON.
- OFF: The unit will be set to always OFF.

- ON — AUTO — OFF

Special Technical Data

- Installation: Plug-in Type
- Voltage: 230V~/50Hz
- Rating: 230V~ AC I 16A /3680W
- Operating Temperatures: -10 ... +40 °C
- Accuracy: ± 1 Min/Mon
- Battery: NIMHI .2V> 1 00hrs.

Package Contents

- 1 x Digital Timer Switch
- 1 x Instruction Manual

Limited Warranty

- ✓ This product is warranted for two years from the time of its purchase.
- ✓ The warranty comes into force at the time of submission of the commercial invoice of the establishment properly filled and sealed.
- ✓ Should there be a problem with the product, the user must contact IMPERli ELECTRONICS at sat@imperlielectronics.com. Once received, the doubts, incidents and problems will be solved by email. If this is not possible and the problem persists, the warranty will be processed in accordance with the applicable law.
- ✓ The warranty is extended to 2 years, referring only to manufacturing defects.
- ✓ The shipping to the nearest technical service or to our headquarters must be carried out with prepaid postage. The article must arrive well packaged and with all its components.
- ✓ We deny any responsibility for data that may arise from misuse of the product.
- ✓ The warranty does not apply in the following cases:

1. If the instructions have not been followed correctly
2. If the product has been tampered with
3. If it has been damaged by improper use
4. If the defects have arisen as a result of faults in the electrical supply

PRODUCT _____
MODEL _____
SERIES _____

TECHNICAL SERVICE : <http://imperlielectronics.com/index.php?controller=contact>



imperii Digital Power Programmer Instruction Manual – [Download \[optimized\]](#)
imperii Digital Power Programmer Instruction Manual – [Download](#)
imperii Digital Power Programmer Instruction Manual – [OCR PDF](#)

[Manuals+](#).