




Inateck KB09117 Bluetooth Keyboard Instruction Manual

[Home](#) » [inateck](#) » Inateck KB09117 Bluetooth Keyboard Instruction Manual 

inateck®


Instruction Manual
KB09117 Bluetooth Keyboard

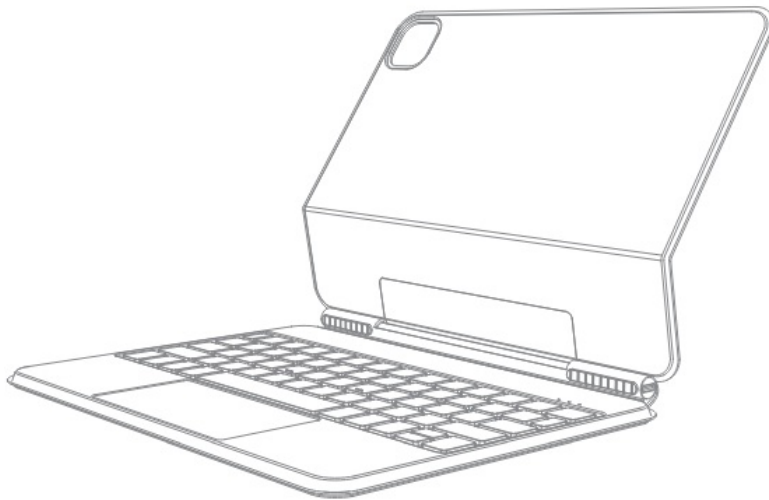

Contents

- 1 Product Diagram
- 2 Power ON/OFF
- 3 Bluetooth Pairing
- 4 Multi-Touch Gestures
- 5 Adjust the Keyboard Backlight
- 6 Shortcut Keys
- 7 LED Indicator
- 8 Restore Factory Defaults
- 9 Charging
- 10 Sleep Mode
- 11 Product Specification
- 12 Packing List
- 13 FCC Note
- 14 Documents / Resources
 - 14.1 References

Product Diagram

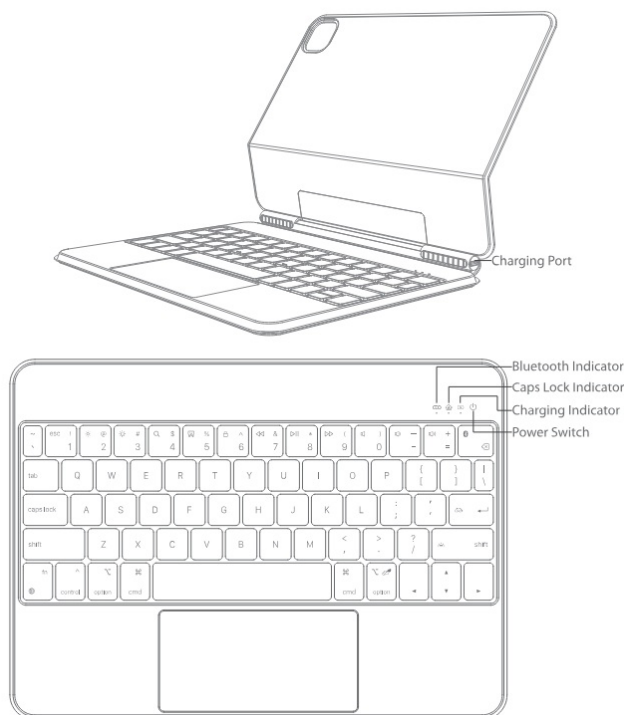


Power ON/OFF

Power ON: Double-click (1) and the Bluetooth indicator will turn on.

Power OFF: Double-click () and all three indicators will flash three times.


Bluetooth Pairing



Step 1: Mount the iPad onto the magnetic panel, double-click 0 to power on the keyboard, and it will automatically enter Bluetooth pairing mode. In future use, please  press 1 + co to enter Bluetooth pairing mode. The Bluetooth indicator will blink once it enters pairing mode successfully.

Step 2: On your iPad, go to Settings > Bluetooth, turn on Bluetooth and then "Inateck KB09117" will show up in "Other Devices":









Step3: Tap “Inateck KB09117 to pair it with your iPad and then the Bluetooth indicator will stay solid in seconds, which means that Bluetooth pairing is completed.

Note: 1)





Set Up Your iPad: For better user experience, please follow steps below to set up your iPad at first use once Bluetooth pairing is completed (using iOS 16 as an example). For any queries, feel free to contact us. Go to Settings > General > Trackpad and drag the slider to the middle of the tracking speed. Go to Settings > General > Trackpad and turn on “Tap to Click” and “Two Finger Secondary Click”. Go to Settings > Accessibility > Touch and turn off AssistiveTouch. Go to Settings > General > Gestures and enable the toggle for the “Four and Five Finger Swipe” setting. Optional Settings Steps to stop Caps Lock changing your keyboard language: Go to Settings > General > Keyboard > Hardware Keyboard and turn off Switch Languages using Caps Lock. Steps to disable the double tap period shortcut: Go to Settings > General > Keyboard > Hardware Keyboard and click the switch to turn on: “Shortcut.” 2) Fix Bluetooth Pairing Problems: **Step 1:** Go to Settings > Bluetooth, find “Inateck KB09117” in My Devices and tap the info button  next to it, then tap “Forget This Device”: If there are multiple pairing records related to the keyboard, please clear all of them.

Step 2: Hold  +  simultaneously for 3 seconds and then the three indicators will blink for 3 times once the factory reset is completed. Step 3: Pair your Inateck K809117 with your iPad.

Multi-Touch Gestures

	Drag: Click and hold the item until it lifts up and drag it to another location with another finger.		Scroll: Slide two fingers up or down to scroll.
	Swipe: Swipe left or right with two fingers.		Zoom in or out: Pinch with two fingers to zoom in or out.
	Secondary click: Click or tap with two fingers.		Show desktop: Swipe up with three fingers
	App Exposé: Swipe up with three fingers and pause.		Swipe between full-screen apps: Swipe left or right with three fingers.

Adjust the Keyboard Backlight

1. Hold  +  simultaneously to adjust the backlight color. 7 colors are available total.
2. Hold  +  simultaneously to adjust the backlight brightness. 3 levels are at your choice.

Shortcut Keys

esc l1	Undo	2 :Ai. @	Brightness-	YA. # 3	Brightness+
Q S 4	Search	v.,5	Take a screenshot	8 A 6	Lock
IC & 7	Last track	011 * 8	Play/Pause	DO (9	Next track
ca 0)	Mute	ti ,	Volume-lame	co l +	Volume t



Common Keyboard Shortcuts

X+ x	Cut	X+ c	Copy	X+ v	Paste
%+A	Select all	X+ Space	Search	control+S pace	Switch keyboard layout
x+ Tab	Switch between Apps				

LED Indicator

Indicator	Status	Meaning
Caps Lock Indicator	Solid	Caps Lock on
	Off	Caps Lock off
Bluetooth Indicator	Blinking	Bluetooth Pairing
	Off	Bluetooth connected or unconnected
Battery Indicator- Red	Blinking	Low battery
	Solid	Charging
Battery Indicator- Green	Solid	Fully charged

Restore Factory Defaults

Hold   Simultaneously for 3 seconds and then the three indicators will blink for 3 times once the { factory reset is completed.

Charging

When the battery level is under 20%, the battery indicator will blink in red. Please recharge the keyboard in time. The recommended charging voltage and current are 5V and 250mA respectively. To recharge the keyboard, you can connect the included USB cable to the charger of your cellphone or the USB port of a computer. The keyboard will be fully charged in 2~3 hours. The indicator will stay in red when the keyboard is charging and turn green when it's fully charged.

Sleep Mode

1. When KB09117 is left idle for 1 minutes, the backlight will turn off.
2. When KB09117 is left idle for 10 minutes, it will enter sleep mode and the Bluetooth connection will be

disrupted. The connection can be rebuilt with a press of any key.

Note: Tapping the trackpad cannot wake up the keyboard. !

Product Specification

Bluetooth Version	Bluetooth 5.3
Bluetooth Range	10 m
Charging Time	2-3h
Continuous Working Time (Backlight on)	About 12h
Continuous Working Time (Backlight off)	About 45h
Operating Temperature	-10°C — +55°C
Bluetooth Frequency Range	2402-2480MHZ
Actuation Force	60±10g
Battery Capacity	500mAh

Packing List

KBO9117 *1
Charging Cable *1
Instruction Manual *1

FCC Note

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Users, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter.

EU Declaration of Conformity

Inateck Co., Ltd. hereby declares that this device complies with the Directive 2014/53/EU .

A copy of the Declaration of Conformity can be accessed from <https://www.inateck.de/pages/euro-compliance>.



Documents / Resources

	Inateck KB09117 Bluetooth Keyboard [pdf] Instruction Manual KB09117 Bluetooth Keyboard, KB09117, Bluetooth Keyboard, Keyboard
--	--

References

- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.