

inateck
KB09121 USB-C
Hub Tablet
Keyboard



inateck KB09121 USB-C Hub Tablet Keyboard Instruction Manual

[Home](#) » [inateck](#) » inateck KB09121 USB-C Hub Tablet Keyboard Instruction Manual 

Contents

- [1 inateck KB09121 USB-C Hub Tablet Keyboard](#)
- [2 Packing List](#)
- [3 Product Diagram](#)
- [4 Bluetooth Pairing](#)
- [5 New Function Key Combinations](#)
- [6 Multi-Touch Gestures](#)
- [7 Adjust the Keyboard Backlight](#)
- [8 LED Indicator](#)
- [9 Charging](#)
- [10 Product Specification](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)

inateck



inateck KB09121 USB-C Hub Tablet Keyboard



Packing List

- KB09121 *1
- Charging Cable *1
- Instruction Manual *1

Product Diagram

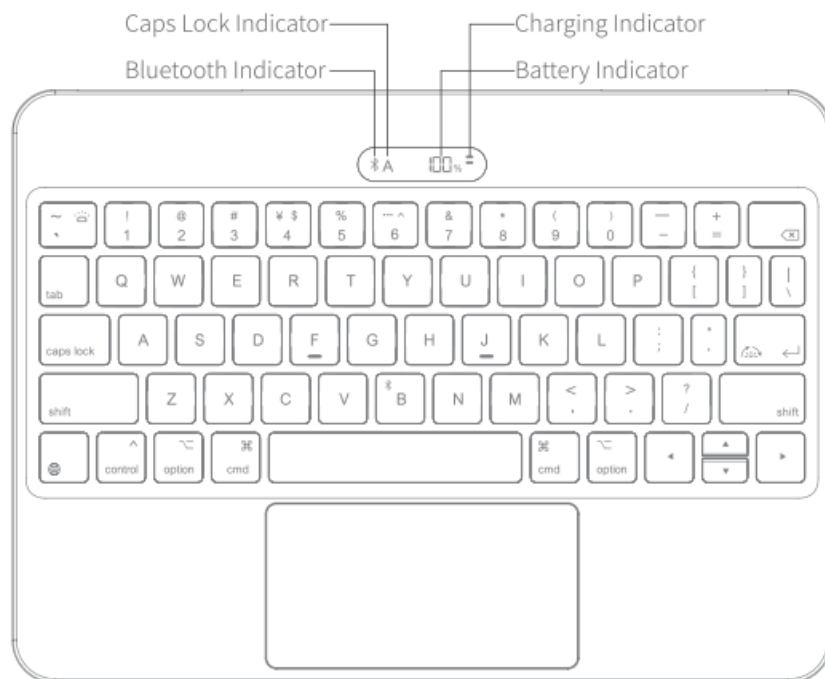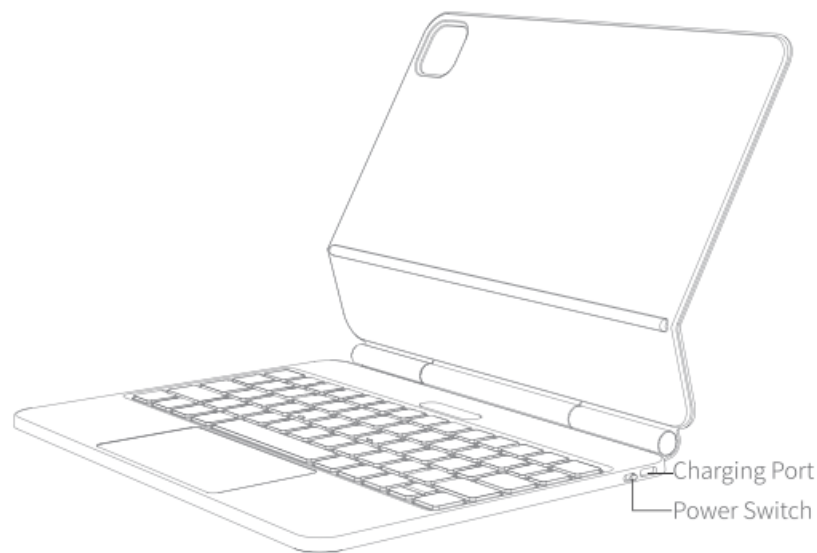

Bluetooth Pairing

- Step 1:** Toggle down the switch on the right side of the keyboard and the screen in the middle will light up, indicating that the keyboard is on. At this point, the Bluetooth indicator will flash rapidly, indicating that the keyboard has automatically entered Bluetooth pairing mode.
- Step 2:** On your iPad, go to Settings- Bluetooth, turn on the Bluetooth, and then "Inateck KB09121" will show up as an available device.
- Step 3:** Tap "Inateck KB09121" to pair it with your iPad. Once the keyboard is paired with your iPad successfully, the Bluetooth indicator will turn off.

Note:

1. Set Up Your iPad:




- For a better user experience, please follow the steps below to set up your iPad for first use once Bluetooth pairing is completed

- Go to Settings > General > Trackpad and drag the slider to the middle of the tracking speed.
- Go to Settings > General > Trackpad and turn on “Tap to Click” and “Two-Finger Secondary Click”
- Go to Settings > Accessibility > Touch and turn off Assistive Touch.
- Go to Settings > General > Gestures and enable the toggle for the “Four and Five Finger Swipe” setting.
- **Optional Settings**
- Steps to stop Caps Lock changing your keyboard language:
- Go to Settings > General > Keyboard > Hardware Keyboard and turn off Switch Languages using Caps Lock
- **Steps to disable the double tap period shortcut:**
- Go to Settings > General > Keyboard > Hardware Keyboard and click the switch to turn on “Shortcut.”






2. Fix Bluetooth Pairing Problems:

1. **Step 1:** Go to Settings > Bluetooth, find “Inateck KB09121” in My Devices and tap the info button  next to it, then tap “Forget This Device”









If there are multiple pairing records related to the keyboard, please clear all of them.

2. **Step 2:** Hold  +  +  the option simultaneously for 5 seconds and then all indicators will blink 6 times once the factory reset is completed. At this point, the keyboard enters Bluetooth pairing mode, and the Bluetooth indicator flashes rapidly.
3. **Step 3:** Pair your Inateck KB09121 with your iPad





New Function Key Combinations

1. Adjust the backlight brightness:  + 
2. Adjust the backlight color:  + 
3. Turn on/off Bluetooth:  + 

Multi-Touch Gestures

	Drag: Click and hold the item until it lifts up and drag it to another location with another finger.		Scroll: Slide two fingers up or down to scroll.
	Swipe: Swipe left or right with two fingers.		Zoom in or out: Pinch with two fingers to zoom in or out.
	Secondary click: Click or tap with two fingers.		Show desktop: Swipe up with three fingers.
	App Exposé: Swipe up with three fingers and pause.		Swipe between full-screen apps: Swipe left or right with three fingers.




Adjust the Keyboard Backlight

- Hold option  +  simultaneously to adjust the backlight brightness. 3 levels are at your choice.
- Hold Option  +  simultaneously to adjust the backlight color. 7 colors are available in total.

LED Indicator

1. **Bluetooth Indicator:** After powering on, the Bluetooth indicator will flash rapidly, indicating that the keyboard is in Bluetooth pairing mode. Once the keyboard is paired with your iPad successfully, the Bluetooth indicator will turn off.
2. **Caps Lock Indicator:** This light keeps on when the keyboard is in uppercase input mode.
3. **Battery Indicator:** When the keyboard is powered on, this light stays on, displaying the keyboard's battery level.
4. **Charging Indicator:** This light is in breathing flash mode when the keyboard is charging, and will stay on when the keyboard is fully charged.

Restore Factory Defaults

Hold option  +  +  simultaneously for 5 seconds, Complete restoration of factory settings.

Charging

When the battery level is under 20%, please recharge the keyboard in time via the included USB charging cable. The recommended charging voltage is 5V. The keyboard will be fully charged in 30~60 min. The charging indicator is in breathing flash mode when the keyboard is charging, and will stay on when the keyboard is fully charged.

Note: There will be a deviation of about 5% between the battery level displayed by the iPad battery widget and the actual battery level.

Please refer to the indicator light for the following situations:

1. When the keyboard is charging, please judge whether it is fully charged according to the status of the charging indicator.
2. Please refer to the battery indicator for the actual battery level.

Sleep Mode

1. When KB09121 is left idle for 30 seconds, the backlight will turn off.
2. When KB09121 is left idle for 15 minutes, it will enter sleep mode and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.

Product Specification

Bluetooth Range	10m
Charging Time	30-60min
Continuous Working Time (Backlight on)	About 12h
Continuous Working Time (Backlight off)	About 100h
Operating Temperature	-10°C ~ +55°C
Bluetooth Frequency Range	2402-2480MHZ
Actuation Force	80 ± 10g
Battery Capacity	500mAh

Battery Safety Warning:

This product contains a built-in rechargeable lithium battery. Please observe the following safety precautions: do not dismantle, hit, crush, or expose the battery to fire. If the battery experiences severe swelling, discontinue use immediately. Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water. During transportation, do not mix the battery with metallic objects.

FCC Note:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the Users, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user’s authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. This equipment complies with FCC’s RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter.

EU Declaration of Conformity

Inateck Co., Ltd. hereby declares that this device complies with the Directive 2014/53/EU. A copy of the Declaration of Conformity can be accessed from <https://www.inateck.de/pages/inateck-euro-compliance>.

Documents / Resources

	inateck KB09121 USB-C Hub Tablet Keyboard [pdf] Instruction Manual KB09121, KB09121 USB-C Hub Tablet Keyboard, USB-C Hub Tablet Keyboard, Hub Tablet Keyboard, Tablet Keyboard, Keyboard
---	---

References

- [User Manual](#)

Manuals+ Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.