



# Insta360 B0CMV1WF7R GPS Preview Remote Instruction Manual

[Home](#) » [Insta360](#) » Insta360 B0CMV1WF7R GPS Preview Remote Instruction Manual 



## Insta360 B0CMV1WF7R GPS Preview Remote Instruction Manual



### Contents


- [1 Overview](#)
- [2 Charging](#)
- [3 Installation](#)
- [4 How to Use](#)
- [5 Firmware Update](#)
- [6 Specifications](#)
- [7 Safety Information](#)
- [8 Disclaimer](#)
- [9 After-Sales Service](#)
- [10 Documents / Resources](#)
  - [10.1 References](#)
- [11 Related Posts](#)

## Overview

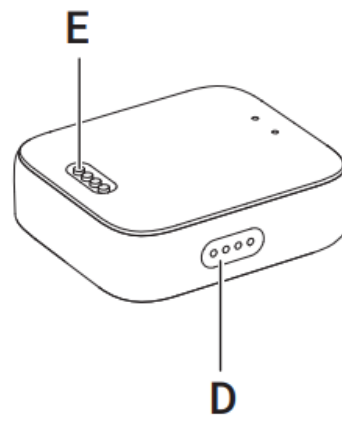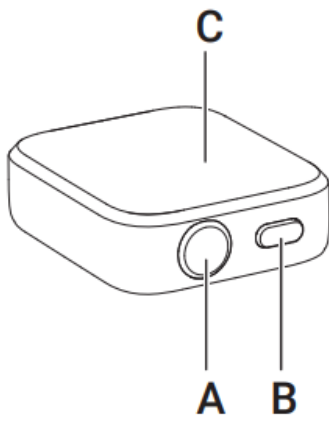

- A. Shutter Button
- B. Power Button
- C. Touch Screen
- D. Speaker
- E. Charging Points


### Wrist Strap

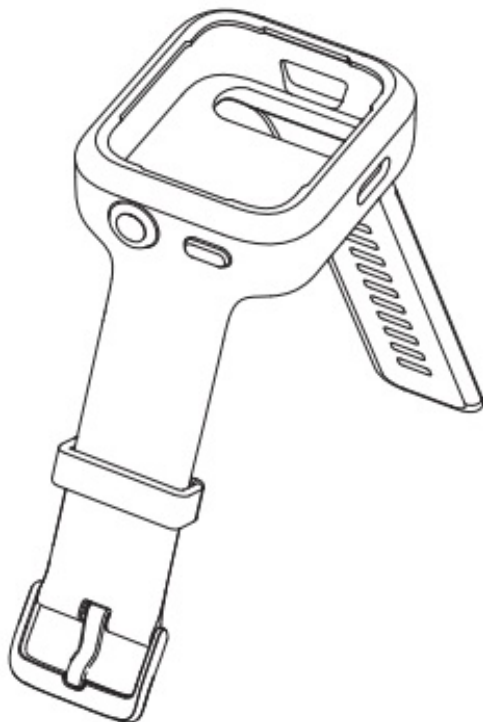

### Universal Strap



## Charging

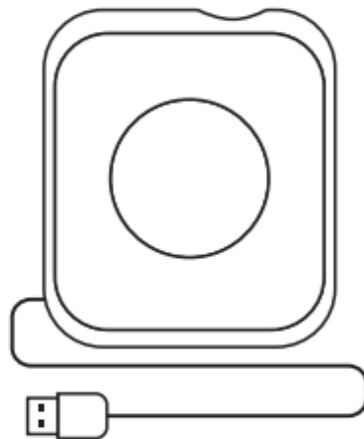


Put the remote on the charging base, ensuring that the charging points are in full contact. Then, connect the charging base to the charger and the power supply. An indicator will appear on the touch screen to confirm the remote is charging.

### Note:

- Please use a 5V/1.5A power adapter to charge the Remote.
- Keep the remote and the charging base clean and dry.


## Installation

### Installed to a wrist

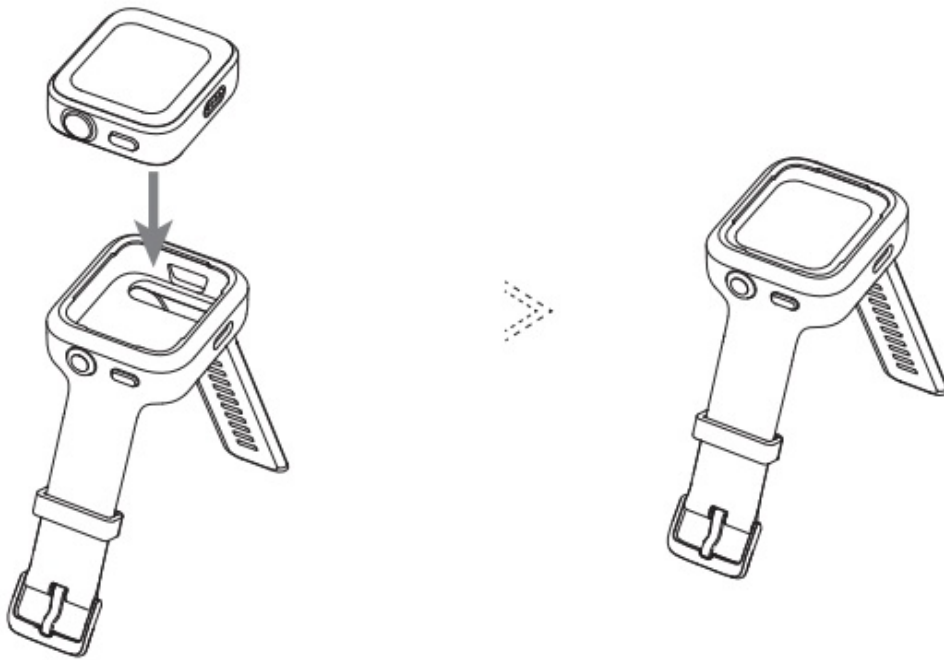

Fit the remote into the Wrist Strap. Ensure the button is in the correct position, then wear on your wrist.

#### **Installed to a selfie stick**

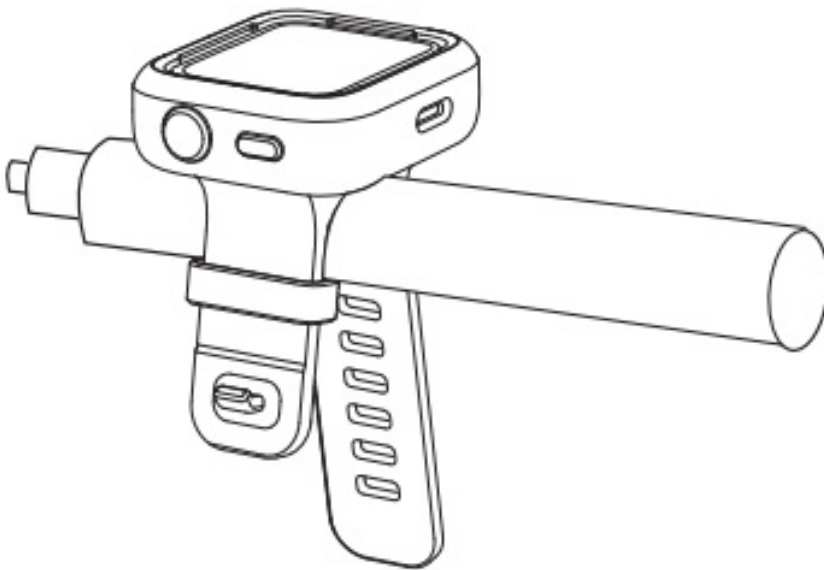

Install the Remote into the Universal Strap. Ensure the button is in the correct position when fitted. Use the remote together with the Selfie Stick.

#### **Installed on to a bike / motorcycle**

Install the Remote into the Universal Strap. Then, fit accordingly to the handlebar of your bike or motorcycle as needed.

### **How to Use**

#### **Power on / off**

When powered off, long press the power button to turn on the remote.

When powered on and with the camera disconnected, long press the power button to turn off the remote. When powered on and with the camera connected, long press the power button to select from the three options: turn off the remote, turn off the camera, or turn off both.

## Connecting and Waking up the Camera

### Connecting the camera


1. Long press the power button to turn on the Remote.
2. Press the power button on the camera to turn it on.
3. Click “Insta360 GPS Preview Remote” on the camera’s Bluetooth Remote interface. When the camera’s screen displays Connected, it has been paired successfully.

#### Important:

- Be sure that your camera’s firmware has been updated to the latest official version.
- The remote can be used up to 26.2ft (8m) for effective preview and 65.6ft (20m) for effective control in optimal conditions.
- For support of cameras, please stay tuned for Insta360’s official website and its future firmware updates of the remote.
- After connecting to the remote for the first time, the device can wake up the camera within its effective range without repeating any pairing steps.

### Connecting and using multiple cameras

To connect with another camera, swipe down from the top of the remote’s watch dial to enter the connecting

interface and tap . The remote will be ready to pair. Enter the Bluetooth Remote feature on your camera and connect to the remote. To connect with more cameras, repeat the process.

#### Notes:

- The remote can control up to 4 cameras at a time. Note that the camera recognizes only one remote at a time.
- When connected with multiple cameras, the Remote will only show the quantity of the connected cameras and won’t display other states.

### Wake up a Camera

Use the remote to wake up your camera. After connecting to the camera for the first time, swipe down on the remote’s touchscreen to enter the connection interface, and choose one of the following two ways to wake up the camera:

**Connect:** Wake up the last connected camera. The camera will automatically connect to the remote once powered on.

**QuickCapture:** Wake up the last connected camera. The camera will automatically connect to the remote and enter QuickCapture.

#### Notes:

- Ensure to activate “Bluetooth Wakeup” on the camera before trying this feature.
- If connected with multiple cameras, the remote cannot perform wake up on any camera.
- To use QuickCapture, make sure it is enabled on your camera.
- Press the remote’s Shutter Button once to enter QuickCapture. Long press the Shutter Button to connect to the camera


## Control the Camera

When the camera is connected, operating on the screen of the remote or pressing its buttons to control the camera.

## Preview Page

When the camera is connected, the remote will display the camera's corresponding information on the preview page.

1. Camera capacity
2. GPS signals
3. Battery level of the camera
4. Preview page
5. Shooting mode
6. Shooting specifications

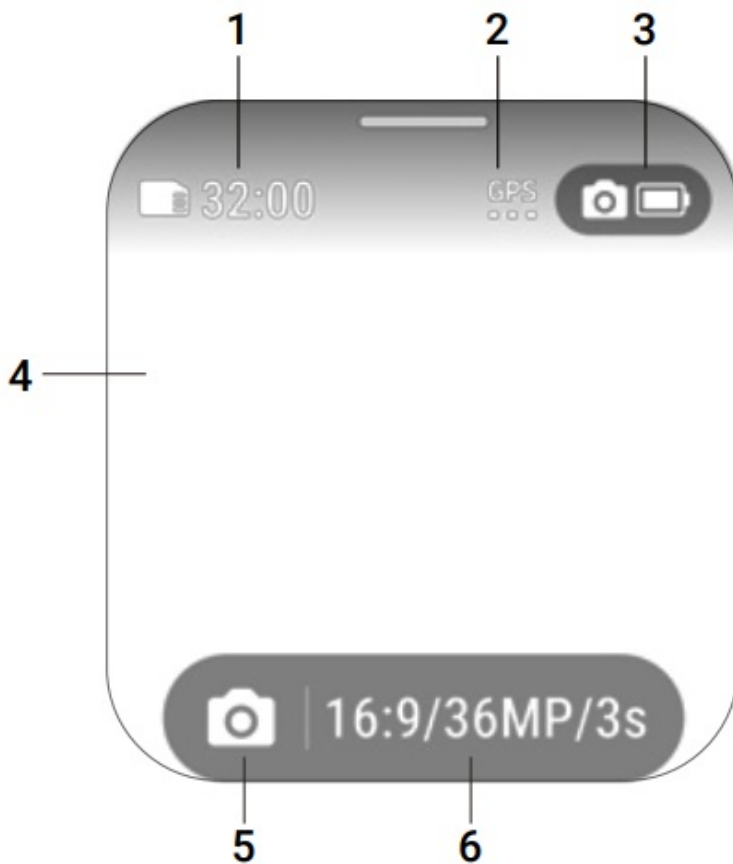

## Switch shooting modes

On the touchscreen: swipe left or right on preview page to switch shooting modes. Power button: Press the power button repeatedly to switch shooting modes

## Shooting specifications

In the preview page, tap the shooting specifications button or swipe from the bottom upwards to enter shooting specifications page to set any preferred parameters.

## A Parameters

In preview page, swipe from right to left to enter the 3A parameter page and to set further parameters.

## Take photos or videos

In the preview page, press the shutter button on the remote to take a photo or start recording, then press the shutter button again to stop recording

## Application Center

### Dashboard, Compass

Swipe left or right on the watch dial of the remote touchscreen to enter Dashboard, Compass or Settings.

### Settings

You will find the following in Settings: Display and Brightness, Direction of Display, Sound, Time, Language, About and Factory Data Reset.

### Firmware Update

Access Insta360 App > Settings > Update, then connect to the remote. If there is new firmware, an update note will pop up. Please update the remote according to the instructions on the App

### Specifications

<b>Model:</b> CINSAAVG	
Wrist Strap	Band fits 140–210mm wrists.
Diameter of Universal Strap	2cm ~ 3.5cm
Work environment	-20°C ~ 40°C (-4°F to 104°F)
Charging environment:	0°C ~ 40°C (32°F to 104°F)
Waterproof	IP68 (up to 4.9ft for 0.5hours)
Battery Capacity	950mAh
Bluetooth	<b>Protocol:</b> 5.0 Operation Frequency: 2402~2480MHz Output Power (E.I.R.P.)

### Safety Information

- This product contains magnets. Keep it away from pacemakers and other devices to avoid interference.
- The product only should be used in temperatures from -4°F to 104°F (-20°C to 40°C).
- If the product is not used for a long time (e.g. 2 months or longer), the battery may be depleted. Please charge the product fully, then turn it on.
- Do not drop or strike the product. Do not place heavy objects on the product, as this will cause damage.
- Do not leave the product near heat sources such as a furnace or heater. Do not leave the product inside of a vehicle on hot days.
- Wipe the product dry as soon as possible after contact with water. Do not wear it when swimming or diving.
- Do not use any liquid cleansers on the product. Do not wipe the charging points on the remote with liquid detergent, as these may corrode and rust, affecting the remote. Only use a soft dry cloth to clean the product


### Disclaimer

Please read this Disclaimer carefully. Using this product means that you acknowledge and accept the terms of this disclaimer. By using this product, you hereby acknowledge and agree that you are solely responsible for your own conduct when using this product and any consequences thereof. You agree to use this product only for proper and lawful purposes. You understand and agree that Arashi Vision Inc. (hereinafter referred to as 'Insta360') accepts

## After-Sales Service



## Documents / Resources

<div data-bbox="140 958 274 1005"><b>Insta360</b> GPS Preview Remote GPS 蓝牙遥控器</div> <div data-bbox="140 1072 247 1079">Instructions for Use / 使用说明</div> <div data-bbox="164 1249 247 1256">EN   CN   DE   ES   FR   IT   JA   KO   RU</div>	<div data-bbox="316 1061 1367 1151"><p><a href="#">Insta360 B0CMV1WF7R GPS Preview Remote</a> [pdf] Instruction Manual</p><p>B0CMV1WF7R GPS Preview Remote, B0CMV1WF7R, GPS Preview Remote, Preview Remote</p></div>
--	--

## References

- [!\[\]\(448bd415caa8b52d2aeb4d58499267b2\_img.jpg\) EU DECLARATION OF CONFORMITY - Insta360](#)
- [!\[\]\(23be4c52910c50d5908bb101588c4f4e\_img.jpg\) Insta360 | Action Cameras | 360 Cameras | VR Cameras](#)
- [!\[\]\(5dc449795a3a9c8d29c257423584cf78\_img.jpg\) EU DECLARATION OF CONFORMITY - Insta360](#)
- [!\[\]\(4b7fb8a3e9c3712ee79f95e386b5ecd4\_img.jpg\) Insta360 | Action Cameras | 360 Cameras | VR Cameras](#)
- [!\[\]\(348b5f08c0a9aee916460ca5f8ad2999\_img.jpg\) Insta360 - Support](#)
- [!\[\]\(5b1a514e7f27fbd3f661e6a3500c4f68\_img.jpg\) Insta360 | Action Cameras | 360 Cameras | VR Cameras](#)
- [!\[\]\(2baf952763ad8c6fd37e6395b59f0aca\_img.jpg\) EU DECLARATION OF CONFORMITY - Insta360](#)
- [User Manual](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.