

Intesis IN7004851000000 Modbus TCP and RTU Master Owner's Manual



Modbus TCP & RTU Master to BACnet/IP & MS/TP Server Application

Item number: IN7004851000000



Modbus TCP & RTU to BACnet/IP & MS/TP - 100 points

Integrate any Modbus RTU or TCP server device, or both simultaneously, with a BACnet BMS or any BACnet/IP or BACnet MS/TP controller. This integration aims to make Modbus signals and resources accessible from a BACnet- based control system or device as if they were a part of the BACnet system and vice versa.

Contents [[hide](#)]

- 1 [Features and benefits](#)
- 2 [General](#)
- 3 [Identification and Status](#)
- 4 [Physical Features](#)
- 5 [Certifications and Standards](#)
- 6 [Use Case](#)
- 7 [Documents / Resources](#)
 - 7.1 [References](#)

Features and benefits

✓ **BACnet/IP client and MS/TP manager support**

Both BACnet/IP client and MS/TP manager are supported.

✓ **Commissioning-friendly approach with Intesis MAPS**

Templates can be imported and reused as often as needed, significantly reducing commissioning time.

✓ **BACnet Advanced features – calendars, schedules...**

BACnet's advanced features, such as calendars, trend logs, schedules, and more, are available.

✓ **32 RTU devices per port with no repeater (255 max)**

The gateway supports up to 32 Modbus devices per RTU node (without repeater) and up to 255 in total.

✓ **Easy integration with Intesis MAPS**

The integration process is quickly and easily managed using the Intesis MAPS configuration tool.

✓ **Configuration tool and gateway automatic updates**

Both the Intesis MAPS configuration tool and the gateway's firmware can receive automatic updates.

✓ **Two Modbus RTU lines for BACnet/IP integration**

Two independent Modbus RTU ports are available for BACnet/IP integrations.

✓ **Template download/generation for Modbus products**

Modbus device templates can be generated, imported locally, or downloaded from a repository.

General

Net Width (mm)	88
Net Height (mm)	90
Net Depth (mm)	58
Net Weight (g)	194
Packed Width (mm)	127
Packed Height (mm)	86
Packed Depth (mm)	140
Packed Weight (g)	356
Operating Temperature °C Min	-10
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	1.7
Input Voltage (V)	For DC: 9 .. 36 VDC, Max: 260 mA, 2.4 WFor AC: 24 VAC ±10 %, 50-60 Hz, Max: 100 mA, 2.4 WRecommended voltage: 24 VDC, Max: 100 mA
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	Up to 100 points.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

Identification and Status

Product ID	IN7004851000000_BAC_MBS
Country of Origin	Spain
HS Code	8517620000
Export Control Classification Number (ECCN)	EAR99


Physical Features

Connectors / Input / Output	Power supply, two EIA-485 ports, Ethernet, Console port USB Mini-B type, USB storage, EIA-232.
LED Indicators	Gateway and communication status.
DIP & Rotary Switches	EIA-485 serial port configuration.
Battery Description	Manganese Dioxide Lithium button battery.


Certifications and Standards

ETIM Classification	EC001604
WEEE Category	IT and telecommunications equipment

Use Case

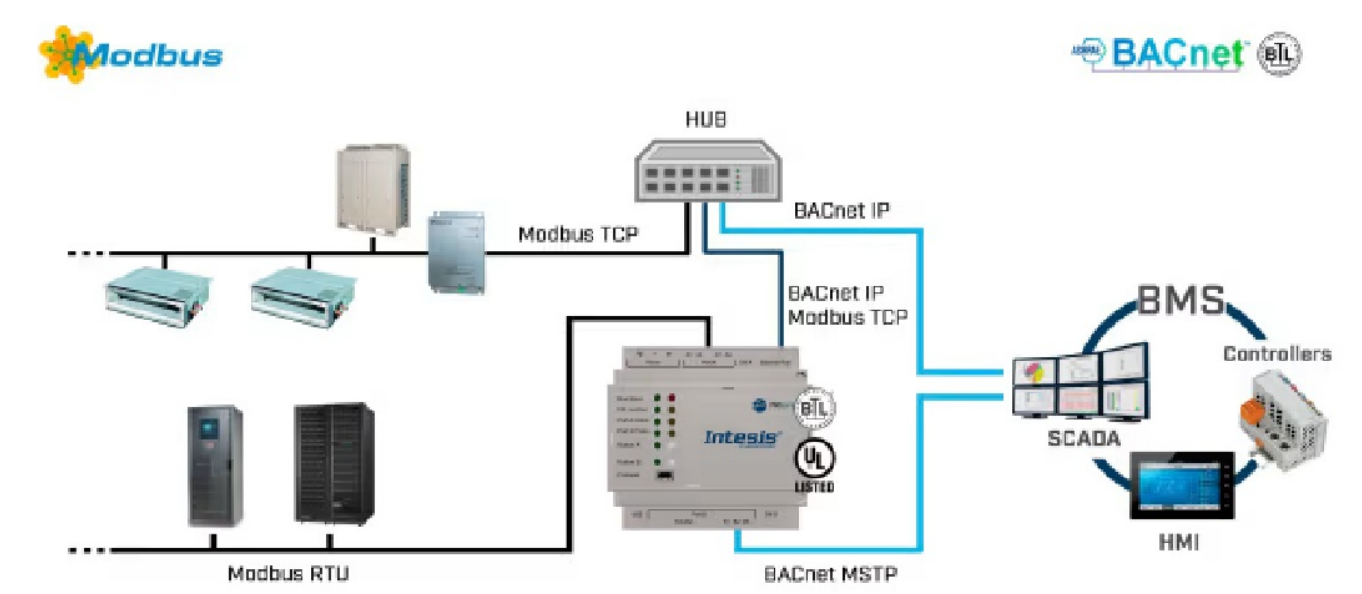

Integration example

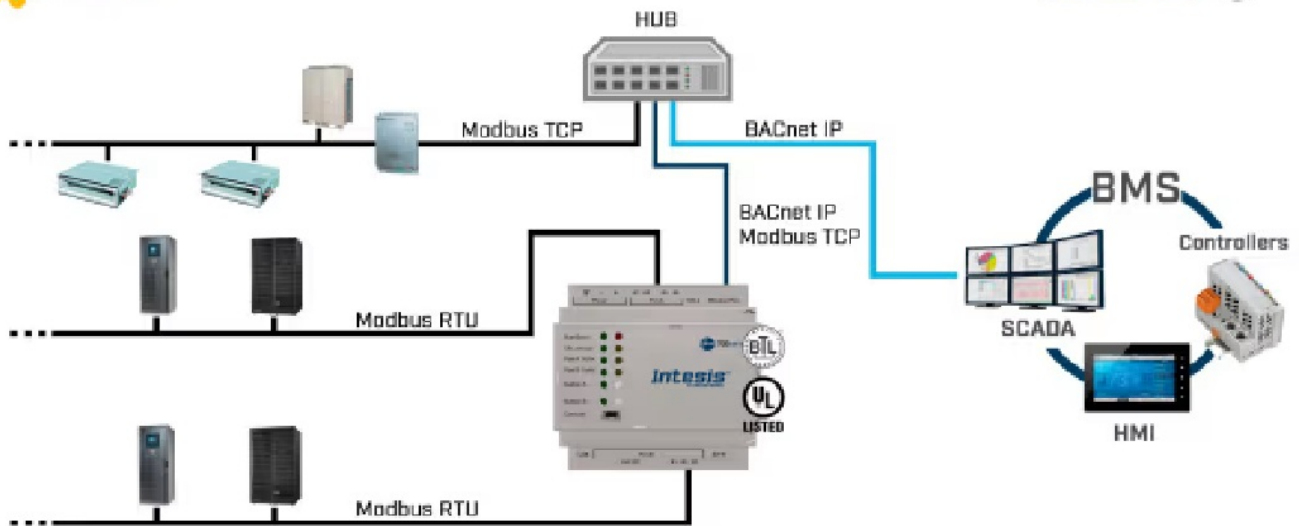


Integration example



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation



Documents / Resources

	<p>Intesis IN7004851000000 Modbus TCP and RTU Master [pdf] Owner's M</p> <p>annual</p> <p>IN7004851000000, IN7004851000000 Modbus TCP and RTU Master, IN7004851000000, Modbus TCP and RTU Master, TCP and RTU Master, RTU Master</p>
--	--

References

- [User Manual](#)

Intesis

IN7004851000000, IN7004851000000 Modbus TCP and RTU Master, Intesis, Modbus TCP and RTU Master, RTU Master, TCP and RTU Master

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.