

INVT EC-TX809-U5 Industrial Ethernet Communication Module User Manual

Home » invt » INVT EC-TX809-U5 Industrial Ethernet Communication Module User Manual



Contents

- 1 EC-TX809-U5 Industrial Ethernet Communication **Module**
- 2 EC-TX809-U5 Industrial Ethernet Communication Module
- 3 Product overview
- 4 Installation and wiring
- **5 Commissioning**
- 6 Documents / Resources
 - **6.1 References**

EC-TX809-U5 Industrial Ethernet Communication Module





EC-TX809-U5 Industrial Ethernet Communication Module

Preface

Thank you for choosing INVT EC-TX809-U5 industrial Ethernet communication module.

The EC-TX809-U5 is an industrial Ethernet communication module that supports multiple protocols and is designed to be integrated into GD880 series VFD control box, enabling communication with Ethernet master stations across various protocols.


This manual provides the product overview, installation, wiring, and commissioning instructions. To ensure safe and proper use of the product and to maximize its performance, please carefully read the manual before installation.

Product features

- Supports protocol selection through function codes.
- Supports up to five protocols, including PROFINET I/O, EtherCAT, EtherNet IP, Modbus TCP, and PowerLink communication protocols.
- Equipped with two RJ45 ports.
- Reaches the communication rate of up to 100 Mbit/s, with a short communication cycle.
- Supports both linear and star network topologies, with certain protocols also accommodating ring network topology.

Product overview

1.1 Product nameplate and model

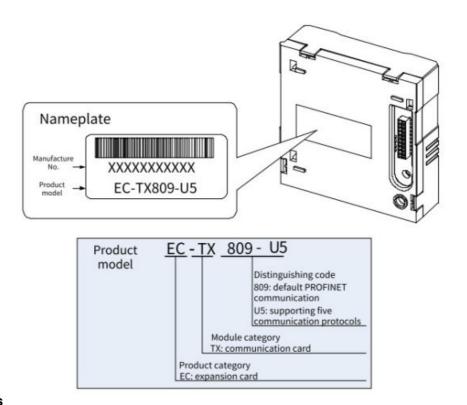

1.2 Specifications

Parameter	Specifications
Working temperature	-10-+50°C
Storage temperature	-20-+60°C
Relative humidity	5%-95% (No condensation)
Running environment	No corrosive gas
Mounting method	Fixed with snap-fits and screws
Ingress protection (IP) rating	IP20
Cooling method	Natural air cooling
Communication rate	100M bit/s
Network topology	Supports both linear and star network topologies, with certain protocols also accommodating ring network topology.

1.3 Structure

Figure 1-1 Product components

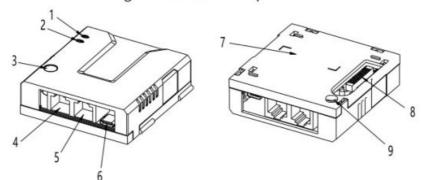


Table 1-1 Product component description

No.	Name	Description	
1	STATUS bus status indicator (gree n)	For details about each protocol, see 1.4 Indicator.	
2	FAULT fault indicator (Red)	For details about each protocol, see 1.4 Indicator.	
3	Installation fixing hole	Helps to secure the communication module and ensure a good PE layer connection.	
4	X1 communication network port	Communication interface 1 (IN).	
5	X2 communication network port	Communication interface 2 (OUT).	
6	Programming configuration port	Connects to the host controller through USB Type-C.	
7	Nameplate	Contains communication module model and serial number information.	
8	Connection port	For electrical connection with the control box.	
9	Positioning hole	Helps to align the communication module and control box for easy installation.	

1.4 Indicator

Table 1-2 PROFINET communication indicators

Indicator	Color	Definition Function	
LED1(STATUS)	Green	Steady on	Communication established successfully, with nor mal 10 data exchange.
		Blinking (on for 500ms, off for 500ms)	Communication established successfully, but with out valid 10 data exchange.
		Blinking (on for 100ms, off for 100ms)	In the communication configuration phase. For ex ample, when DCP configuration commands are tri ggered, it will blink simultaneously with the FAULT indicator.
		Steady off	The communication between the communication card and PLC is not in Online state.
	Red	Steady off	No fault
LED2(FAULT)		Blinking (on for 100ms, off for 100ms)	Communication establishment is abnormal.

Table 1-3 EtherCAT communication indicators

Indicator	licator Color Definition Function		Function	
	Green	Steady off	In 'nit state.	
LED1(STATUS)		Blinking (on for 200ms, off for 200ms)	In PreOP state.	
LLD I(OTATOS)		Single flash (on for 200ms, off for 1s)	In SafeOP state.	
		Steady on	In OP state.	
	Red	Steady off	No fault	
LED2(FAULT)		Blinking (on for 200ms, off for 200ms)	The Init/PreOP fault occurred.	
LLDZ(I AOLI)		Single flash (on for 200ms, off for 1s)	The SafeOP fault occurred.	
		Steady on	The OP fault occurred.	

Table 1-4 PowerLink communication indicators

Table 1-5 EtherNet IP communication indicators

Table 1-6 Modbus TCP communication indicators

1.5 Communication protocol selection

Table 1-7 Communication protocol selection

Function code	Communication protocol	Default
P7.83-P7.91	PROFINET	Factory setting (0)
	EtherCAT	1
	PowerLink	2
	EtherNet IP	3
	Modbus TCP	4

1.6 Protocol parameter

Table 1-8 Protocol parameter description

Function cod e	Communication pr otocol	Description
	PROFINET	 Supports the PROFINET protocol, accommodating PROFINET 10 devices, medium redundancy protocol (MRP), and system redundancy protocol (S2). Equipped with the slave station GSDML configuration file, it can communicate with Siemens PLC and other master stations. Enables basic operations on VFDs, such as reading and writing process values, reading status values, and reading/writing function codes. This communication card supports up to 3210s. Applicable to linear, star, and ring network topologies.
	EtherCAT	 Configured with a slave XML configuration file, communication betwee n the master stations (such as Beckhoff PLCs and INVT controllers) and the VFD can be established. It supports up to 32 bytes of I/O data exchange but does not support CiA301 or CiA402 EoE protocols. Supports PDO services and manufacturer-defined object dictionaries, meeting the EtherCAT compliance testing certification requirements wit hin the factory. Applicable to linear, star, and ring network topologies. Equipped with two RJ45 ports, designated for IN and OUT directions.
P7.83— P7 91	PowerLink	 Configured with a slave station XDD configuration file, communication between master stations (such as B&R PLCs) and the VFD can be esta blished. The CiA401 protocol is not supported. Supports PDO services and manufacturer-defined object dictionaries f or communication with the VFD Applicable to linear and star network topologies.
	EtherNet IP	 Supports ODVA standards and DLR ring protocol. When configured with a slave station EDS configuration file, it can communicate with Rockwell PLC and other master stations. Enables basic operations on VFDs, such as reading and writing process values, reading status values, and reading/writing function codes. This communication card supports up to 3210s. Applicable to linear, star, and ring network topologies.
	Modbus TCP	 Supports the Modbus TCP protocol. A Modbus TCP slave station can communicate with multiple master stations simultaneously. It can communicate with Schneider PLC, INVT controllers, and other master stations. Enables basic operations on VFDs, such as reading and writing proce ss values, reading status values, and reading/writing function codes. Applicable to linear and star network topologies.

Note: After each change to P7.8-P7.91, the expansion card will automatically reset and complete the protocol switchover. It will take some time to re-establish communication with the PLC using the new protocol. If a communication timeout fault occurs on the VFD during this period, you can clear it by pressing the reset key on the keypad.

Installation and wiring

2.1 Installation precautions



Make sure the device have been powered off before installation.

Note

- There are three expansion card interfaces (slot 1, slot 2, and slot 3) on the control box. You can us e any of these slots based on the actual wiring requirements.
- The EC-TX809-U5 industrial Ethernet communication module is recommended to be installed in slo t 3.

Tools required for installation: Phillips screwdriver PH1; slotted screwdriver SL3.


Table 2-1 Screw torque requirements

Screw requirements	Fastening torque
M3	0.55 Nm

2.2 Dimensions

EC-TX809-U5 dimensions are 73.5×74×23.3mm (WXHXD). See Figure 2-1.

Figure 2-1 Product outline and installation dimensions (unit: mm)




2.3 Installation instructions

EC-TX809-U5 is recommended to be installed in slot 3 of the control box. The following describes the installation procedure using slot 3 as an example.

Step 1 Position the communication module in the designated area of slot 3 on the control box, ensuring proper alignment with the slot before securely fastening it together.

Step 2 Guide the communication module into place using the positioning stud.

Step 3 Secure it in position with M3 screws, completing the installation.

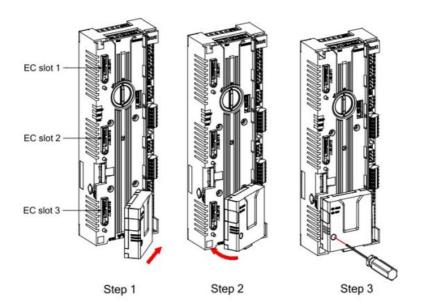



- The communication module and control box are electrically connected through a slot. Please install them in place..
- To ensure the reliable operation of the communication module and EMC requirements are met, please tighten the screws according to the recommended torque for reliable grounding.

2.4 Disassembly instructions

You can disassembly the product by reversing the order of steps described in section 2.3. Installation instructions.

Step 1 Disconnect the power supply and disassemble all cables connected to the expansion module.

Step 2 Use a Phillips screwdriver to remove the grounding screw of the module.

Step 3 Pull the expansion module out to a suitable position.

2.5 User's wiring terminals

Figure 2-2 Product terminal structure

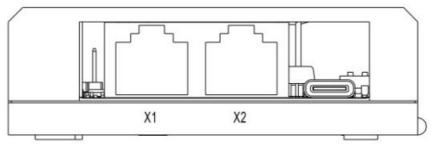


Table 2-2 RJ45 terminal functions

2.6 Wiring precautions

The communication card uses standard RJ45 interfaces, and its electrical connections are shown in Figure 2-3, Figure 2-4, and Figure 2-5.

Note: It is recommended to use double-twisted shielded Category 5e Ethernet cables, with crystal heads equipped with iron shells to meet the grounding shield protection.

Figure 2-3 Linear network topology electrical connection



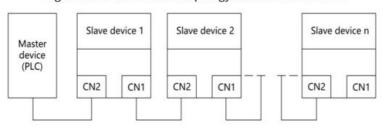


Figure 2-4 Star network topology electrical connection

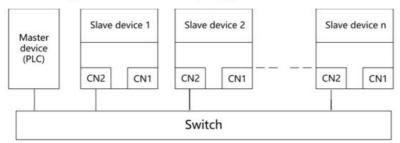

Note: For the star network topology, you need to prepare switches.

Figure 2-5 Ring network topology electrical connection

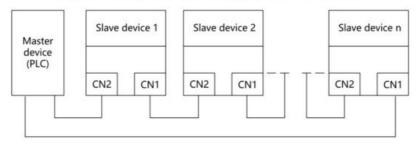

Commissioning

Figure 3-1 EC-TX809-U5 configuration flowchart

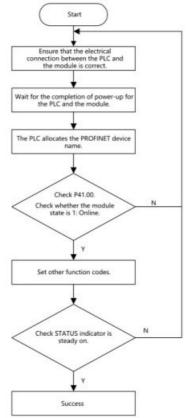


Table 3-1 EC-TX809-US related function code settings

Function code	Name	Parameter description	Setting rang e	Default	Remarks
P37.02- P37.13	Sent PZD1- PZD12 source	0: 0 1:Digital (0-65535, 0) 2:Other-C connector (0.00-99.9 9, 20.34) 3:All 4:Al2 5:HDI1 6:HDI2 7:Multi-step running 8:MOP	0-8	2	Slave-to- master data source
P37.62- P37.77	Sent PKW1- PZD12 data display	Sent PKW1-PKW4 data display Sent PZD1-PZD12 data display	0x0000- OxFFFF	0x0000	Slave-to- master data display
P37.78- P37.93	P37.78- Received PKW1- data display	Received PKW1-PKW4 data display Received PZD1-PZD12 data dis play	Ox0000- OxFFFF	Ox0000	Master-to- slave data display
P38.00	Matching bus type of bus adapter	0: None 1:PROFIBUS-DP module 2:PROFINET 10 module 3:CANopen module 4:EtherNet IP module 5:EtherCAT module 6:PowerLink module 7:216 communication card module	0-7	2	_
P38.02- P38.13	Sent PZD1- PZD12 source	0: 0 1:Digital (0-65535, 0) 2:Other-C connector (0.00-99.9 9, 20.34) 3:All 4:Al2 5:HDI1 6:HDI2 7:Multi-step running 8:MOP	0-8	2	Slave-to- master data source
P38.62- P38.77	Sent PKW1- PZD12 data display	Sent PKW1-PKW4 data display Sent PZD1-PZD12 data display	0x0000- OxFFFF	Ox0000	Slave-to- master data display
P38.78- P38.93	P38.78- Received PKW1- PZD12 data display	Received PKW1-PKW4 display Received PZD1-PZD12 data dis play	Ox0000- OxFFFF	Ox0000	Master-to- slave data display
P42.14- P42.25	Industrial Ethernet communication card IP	Industrial Ethernet communicati on card IPaddress, subnet mas k, and gateway	0-255	_	Modbus TCP, EtherNet/IP

P41.00	Module online state	Bit0-bit8 EC slot module online state (0: Offline; 1: Online)	0-1	0	PROFINET 10
P45.03	Module online state	Bit0-bit8 EC slot module online state (0: Offline; 1: Online)	0-1	0	EtherCAT
P45.04	EtherCAT station no.	Slave station no. setting.	0-65535	1	
P45.06	Module online state	Bit0-bit8 EC slot module online state (0: Offline; 1: Online)	0-1	0	PowerLink
P45.08	PowerLink station no.	Slave station no. setting.	1-256	1	
P45.00	Module online state	BitO-bit8 EC slot module online state (0: Offline; 1: Online)	0-1	0	Select adapter A for EtherNet/IP
P42.11	Module online state	Bit0-bit8 EC slot module online state (0: Offline; 1: Online)	0-1	0	Modbus TCP
P42.00	Local Modbus address	Slave address	1-247	1	

Note:


- When two identical expansion modules are inserted into a VFD simultaneously, only the module in the slot with a smaller number will be active, while the module in the slot with a larger number will be redundant. For example, if two PROFINET expansion modules are inserted into slot 1 and slot 2, the PROFINET module in slot 1 will be active.
- For additional parameter settings for EC-TX809-U5, see the GD880 series product software manuals.



Copyright©INVT.

Manual information may be subject to change without prior notice.





Documents / Resources



INVT EC-TX809-U5 Industrial Ethernet Communication Module [pdf] User Manual TX809-U5, EC-TX809-U5 Industrial Ethernet Communication Module, EC-TX809-U5, Industrial Ethernet Communication Module, Communication Module, Module

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.