



IOGEAR GRSH01 Fixed Server Rack Cabinet Shelf Instruction Manual

[Home](#) » [logear](#) » IOGEAR GRSH01 Fixed Server Rack Cabinet Shelf Instruction Manual 



Quick Start Guide
Adjustable Depth Fixed Rack Shelf –
Vented/Heavy Duty

Contents

- [1 Package Contents](#)
- [2 System Requirements](#)
- [3 Overview](#)
- [4 Hardware Installation](#)
- [5 Limited Warranty](#)
- [6 Contact](#)
- [7 Compliance Information](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)

Package Contents

- 1 x 1U Rack Shelf
- 2 x Front Mounting Brackets
- 2 x Rear Mounting Brackets
- 8 x M6x12mm Screws
- 8 x M6 Cage Nuts
- 8 x Plastic Washers
- 1 x Quick Start Guide

System Requirements


Mounting to Square Cage Holes:

- The included M6 cage nuts will be needed along with the M6 Screws and washers.

Mounting to M6 Threaded Holes:

- No cages nuts are needed. Only M6 screws and washers are needed.

Overview

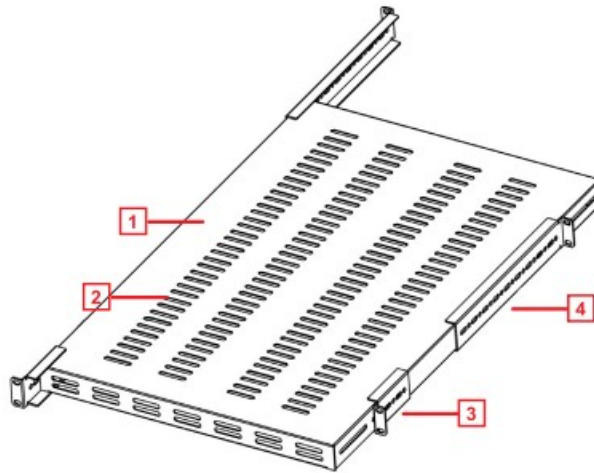

1. Shelf Surface

- Mount the server rack equipment
- The 1U Shelf Body is 27.5in (700mm) deep, not including the adjustable mounting brackets

2. Ventilation Holes

- Promote air flow for the mounted equipment. (Only applies to GRSH01)

3. Front Mounting Brackets

- Fasten Shelf to the Front Posts of the rack or cabinet
- Holes on the sides of the Mounting Brackets allow for Depth Adjustment. M6x12mm Panel Screws (x 4) secure the Mounting Brackets to the desired depth

4. Rear Mounting Brackets

- Fasten Shelf to the Rear Posts of the rack or cabinet
- Holes on the sides of the Mounting Brackets allow for Depth Adjustment. M6x12 mm Panel Screws (x 4) secure the Mounting Brackets to the desired depth

Hardware Installation

1. Locate a suitable location in the rack or cabinet to mount the Shelf, The Shelf requires 1U of Space. To mount the shelf level, ensure the mounting brackets are mounted on the same U height number. To determine this, most of the four posts racks or cabinets have labeled front and rear posts.
2. Determine the Depth of the Mounting Posts on the rack, The Adjustable Mounting Depth of the Shelf is from 19.5 in (495 mm) to 38,3in (974 mm),
3. Use a Phillips Head Screwdriver to Loosen the Panel Screws of the Front and Rear Mounting Brackets so they

can slide freely. Each Mounting Bracket uses Two Panel Screws.

4. (Optional) Remove all the Panel Screws (x 8) of the Front and Rear Mounting Brackets if the adjustment requires different Depth Adjustment Holes on the sides of the Shelf.
5. Adjust the Front and Rear Mounting Brackets to achieve the same Mounting Depth as the Mounting Posts of the rack, Next, secure the Panel Screws (x 8) of the Front and Rear Mounting Brackets with a Phillips Head Screwdriver,
6. (Optional) Install the M6 Cage Nuts (x 8) into the appropriate Cage Nut Holes (x 8) on the chosen U Height Number on the Mounting Posts of the rack. Use a cage nut tool if available or your preferred installation method to install the M6 Cage Nuts.
7. Place the M6 Plastic Washers (x 8) onto the M6x12mm Screws (x 8).
8. Place the Shelf into the rack in the chosen U Height Number. Align the Mounting Holes of the Front Mounting Posts of the rack with the Front Mounting Brackets. Keep supporting the weight of the shelf.
9. Use a Phillips Head Screwdriver to install the M6x12mm Screws and fasten the Front Mounting Brackets to the Front Mounting Posts of the rack, Ensure the M6 Screws are properly tightened.
10. Repeat Step 8 for the Rear Mounting Brackets.
11. (Optional) Make minor depth adjustments to the Front and Rear Mounting Brackets as needed.

Limited Warranty

Warranty Information

This product carries a 3 Year Limited Warranty. For the terms and conditions of this warranty, please go to

<https://www.iogear.com/support/warranty>

Register online at <https://www.iogear.com/register>

Important Product Information

Product Model

Serial Number

Contact

WE'RE HERE TO HELP YOU!

NEED ASSISTANCE SETTING UP THIS PRODUCT?

Make sure you:

1. Visit www.iogear.com for more product information
2. Visit www.iogear.com/support for live help and product support

IOGEAR

iogear.custhelp.com

support@iogear.com

www.iogear.com

Compliance Information

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital service, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. Any changes or modifications made to this equipment may void the user's authority to operate this equipment. This equipment generates, uses, and can radiate radio frequency energy. If not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However,

there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules, Operation is subject to the following two conditions:


1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

CE Statement:

This device has been tested and found to comply with the following European Union directives: Electromagnetic Capability (2004/108/EC), Low Voltage (2006/95/EC) and R&TTED (1999/5/EC).



Documents / Resources

	<p>IOGEAR GRSH01 Fixed Server Rack Cabinet Shelf [pdf] Instruction Manual GRSH01, GRSH02, GRSH01 Fixed Server Rack Cabinet Shelf, GRSH01, Fixed Server Rack Cabinet Shelf, Server Rack Cabinet Shelf, Rack Cabinet Shelf, Cabinet Shelf, Shelf</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.