


2X4 LED HIGH LUMEN SELECTABLE CEILING PANEL

Replace inefficient fluorescent tubes with an abundance of radiant light and low-wattage backlit LED panel. Dustproof and 0-10V dimmable, this fixture also includes flexible mounting brackets for recessed installation. Use it in standard 2x4 drop ceilings for optimal brightness in offices, warehouses, hallways, and more.

MODELS

PN24_HO

LIGHT DISTRIBUTION ANGLE

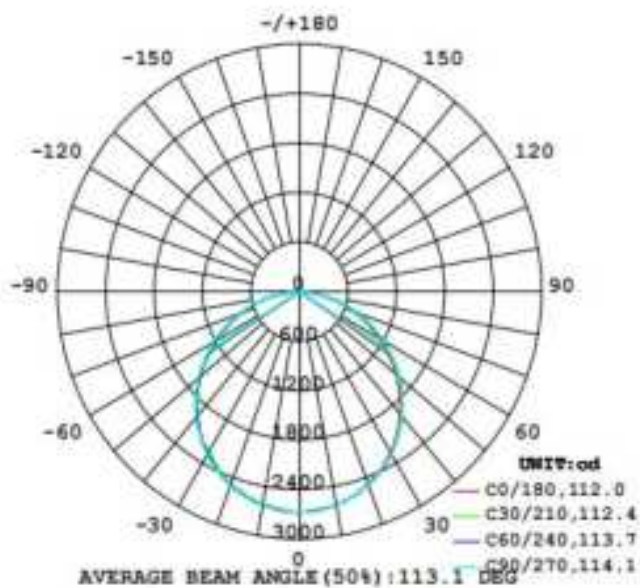

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS



SPECIFICATIONS

Voltage	AC120 - 277V
Wattage	40W/50W/60W
Power Factor	>0.90

LIGHTING PERFORMANCE

Lumens	8500LM
Amps	0.66 A
Frequency	50/60 Hz
Color Rendering Index	80+
Beam Angle	120°
Dimmable	0-10V
Efficacy	125 lm/w
Color Temperature	4000K/5000K/6000K

ENVIRONMENT

Operating Temperature	32° F - 113° F
Moisture Rating	Wet Rated

CONSTRUCTION

Housing Material	SPCC
Weight	7.28 lbs

LIFETIME

Average Lifetime	50,000 hrs
Warranty	5 Years