


J-TECH-DIGITAL-JTD-183-HDMI-Over-Ethernet-Extende



J-TECH DIGITAL JTD-183 HDMI Over Ethernet Extender User Manual

[Home](#) » [J-TECH DIGITAL](#) » J-TECH DIGITAL JTD-183 HDMI Over Ethernet Extender User Manual 

Contents

- [1 J-TECH DIGITAL JTD-183 HDMI Over Ethernet Extender](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Introduction](#)
- [5 Features](#)
- [6 Panel Information](#)
- [7 Maintenance](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)



J-TECH DIGITAL JTD-183 HDMI Over Ethernet Extender



Product Information

Specifications:

- **Operating Temperature Range:** N/A
- **Operating Humidity Range:** N/A
- **Input Video Signal:** HDMI | HDCP 1.4
- **Input DDC Signal:** N/A
- **Video Format Support:** 1080P 8-bit
- **Video Output:** 200ft. (Max) over single CAT5e/6
- **Audio Format Support:** DTS-HD Master Audio, Dolby True-HD etc.
- **Transmission Distance:** 200ft.
- **Power Consumption:** 12W (Max)
- **Dimensions (L x W x H):** 83mm x 48mm x 25mm (3.27 x 1.89 x 0.98 inches)
- **Net Weight:** 250g | 0.55 (Pair)

Product Usage Instructions

Connection and Operation:

1. Connect the HDMI signal source to the transmitter's HDMI input port.
2. Connect an ethernet cable between the transmitter and the receiver's ethernet ports (The cable must follow the standard of EIA-TIA 568B).
3. Connect an HD display to the HDMI output port of the receiver.

Using EDID Copy Function:

If you are experiencing issues with your HDMI extender and not seeing an image on your display, follow these steps:

1. Connect the Transmitter of the extender to an HDMI input port on your TV, projector, monitor, or other display.
2. Hold down the EDID copy button for about 5 seconds.
3. Turn off the extender to save the information onto the transmitter.
4. Reconnect your transmitter back to your source, and the extender will now pass the EDID information copied from your display.

Note: You can also erase previously saved EDID information by following these steps:

1. Disconnect the HDMI cable from the transmitter.
2. Hold down the EDID copy button for about 3-5 seconds (the red LED should flash for a few seconds and then become static).
3. Power down the transmitter and all previously saved EDID information will be erased from the extender.

FAQ

- **Q: How far can the JTDHDEX-1P extend a 1080P signal?**

- **A:** The JTDHDEX-1P can extend a 1080P signal up to 200ft, which is four times the transmission distance of a typical HDMI cable.

- **Q: What is PoC (Power over Cable) function?**

- **A:** PoC allows users to power both the transmitter and receiver with only one power adapter, reducing clutter and providing a cleaner setup.

1080P 60Hz HDMI Over Ethernet Extender w/ Poc JTD-183 | JTDHDEX-1P

QR code



Scan the QR code below, or visit <https://resource.jtechdigital.com/products/183> to view and access detailed digital resources regarding this unit.

Introduction

The JTDHDEX-1P HDMI over single ethernet extender is able to extend a 1080P audio/video signal up to 200ft. which is four times the transmission distance of a typical HDMI cable. The PoC (power over cable) function allows users to only use one power adapter between the transmitter and the receiver, making for a cleaner, clutter-free setup. This extender is viable in any installation, whether residential or commercial.

Features

Extends 1080P signal up to 200ft. between the transmitter and receiver over a single IEEE-568B UTP cable (Cat5e/6/7)

The receiver can be powered by transmitters via PoC

Supports Deep Color up to 36-bit

Lossless compressed digital audio; Dolby TrueHD, DTS-HD, Master Audio

Transmit digital audio and video signals with zero signal loss

Data transfer speed of 6.75Gbps

EDID copy function for maximum compatibility


Package Contents


- (1) x Transmitter
- (1) x Receiver
- (1) x DC12V Power Adapter
- (1) x User Manual

Specifications

| | |
|-----------------------------|---|
| Operating Temperature Range | -5° ~ 35°C 23° ~ 95°F |
| Operating Humidity Range | 5 to 90%RH (No condensation) |
| Input Video Signal | 0.5 - 1.0VPP |
| Input DDC Signal | 12V p-p (TTL) |
| Video Format Support | Up to 1080P |
| Video Output | HDMI HDCP 1.4 |
| Audio Format Support | DTS-HD Master Audio, Dolby True-HD etc. |
| Transmission Distance | 1080P 8-bit 200ft. (Max) over single CAT5e/6 24AWG/Solid |
| Power Consumption | 12W (Max) |
| Dimensions (L x W x H) | 83mm x 48mm x 25mm 3.27" x 1.89" x 0.98" |
| Net Weight | 250g 0.55 (Pair) |

Panel Information

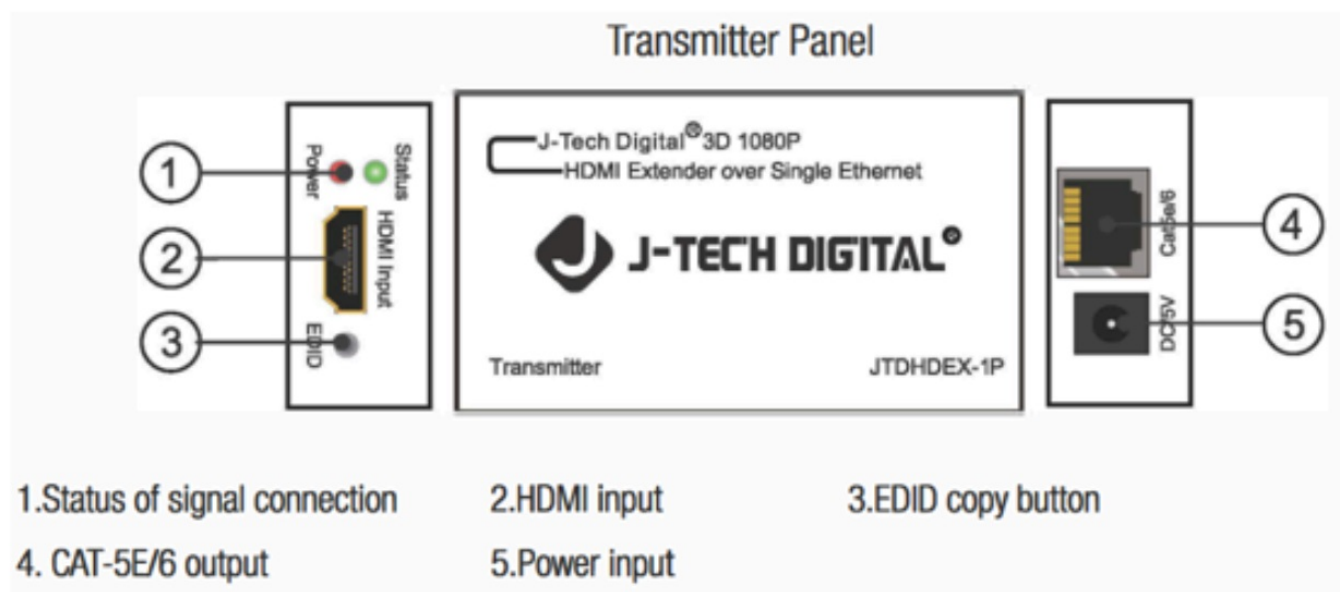

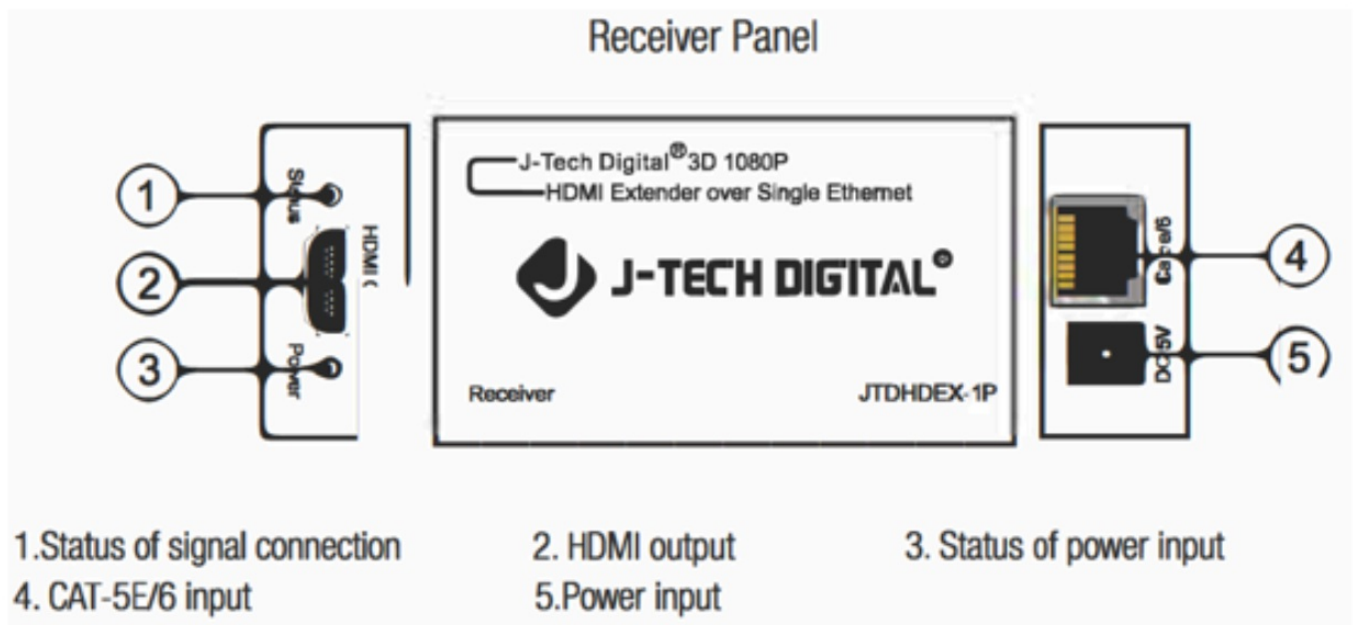

Connection and Operation

Connect the HDMI signal source to the transmitter's HDMI input port. Connect an ethernet cable between the transmitter and the receiver ethernet ports (The cable must follow the standard of EIA-TIA 568B).

Connect an HD display to the HDMI output port of the receiver.

Using EDID Copy Function

If you are experiencing issues with your HDMI extender and are not seeing an image on your display, it could be caused by an incompatibility between your source and the extender. However, there is a very simple solution to this problem, and it lies within the EDID copy function of the JTDHDEX-1P.

Follow these steps for the EDID copy function:

1. First, connect the Transmitter of the extender to an HDMI input port on your TV, projector, monitor, or other display. Next, hold down the EDID copy button for about 5 seconds. Once you have pressed the button long enough, make sure to turn the extender off so that the information can be saved onto the transmitter.
2. Now, simply reconnect your transmitter back to your source and the extender will now pass the

EDID information copied from your display!

Note: You can also erase previously saved EDID information, in case you plan on using this extender on a different display.

Follow this next step to erase the stored EDID information:

Disconnect the HDMI cable from the transmitter, and hold down the EDID copy button for about 3-5 seconds (the red LED should flash for a few seconds then become static, or stop flashing). Once again, simply power down the transmitter and all of the previously saved EDID information will be gone from the extender.

Maintenance

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner, or benzene to clean.

Warranty

If your product does not work properly because of a defect in materials or workmanship, our company (referred to as "the warrantor") will, for the length of the period indicated as below, "Parts and Labor (1) Year", which starts with the date of original purchase ("Limited Warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product.

The decision to repair or replace will be made by the warrantor. During the "Labor" limited warranty period, there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers products purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

Mail-In Service

When shipping the unit, carefully pack and send it prepaid, adequately insured, and preferably in the original carton. Include a letter detailing the complaint and provide a daytime phone and/or email address where you can be reached.

Limited Warranty Limits and Exclusions

This Limited Warranty ONLY COVERS failures due to defects in material or workmanship and DOES NOT COVER normal wear and tear or cosmetic damage. The Limited Warranty ALSO DOES NOT COVER damages which occurred in shipment, or failures which are caused by products not supplied by the warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, mis- adjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service center or other Authorized Servicer, or damage that is attributed to acts of God.

There are no express warranties except as listed under "Limited Warranty Coverage". The warrantor is not liable for incidental or consequential damages resulting from the use of this product or arising out of any breach of this warranty. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the service, loss of or damage to media or images, data or other recorded content. The items listed are not exclusive but are for illustration only). Parts and services, which are not covered by this limited warranty, are your responsibility.



WWW.JTECHDIGITAL.COM


PUBLISHED BY J-TECH DIGITAL INC.

9807 EMILY LANE
STAFFORD, TX 77477

TEL: 1-[888-610-2818](tel:888-610-2818)

E-MAIL: SUPPORT@ITECHDIGITAL.COM

Documents / Resources

| | |
|--|---|
|  The image shows the cover of the user manual for the J-Tech Digital JTD-183 HDMI Over Ethernet Extender. It features the J-Tech Digital logo at the top, followed by 'USER MANUAL'. Below this is a photograph of the device, which is a black rectangular box with 'J-Tech Digital' and 'JTD-183' printed on it. At the bottom, there are logos for HDMI and CEFC, and some small text including '1080P 60Hz HDMI OVER ETHERNET EXTENDER KIT (JTD-183 / JTD183-1P)' and 'www.jtechdigital.com'. | <p>J-TECH DIGITAL JTD-183 HDMI Over Ethernet Extender [pdf] User Manual</p> <p>JTD-183 HDMI Over Ethernet Extender, JTD-183, HDMI Over Ethernet Extender, Over Ethernet Extender, Ethernet Extender, Extender</p> |
|--|---|

References

- [B J-Tech Digital ® Official Site | Professional AV Solution Provider](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.