




# J-TECH DIGITAL JTD-3023 HDMI Over Ethernet Extender User Manual

[Home](#) » [J-TECH DIGITAL](#) » J-TECH DIGITAL JTD-3023 HDMI Over Ethernet Extender User Manual 

**J-TECH DIGITAL JTD-3023 HDMI Over Ethernet Extender**



## Contents

- 1 Safety Instructions:
- 2 Introduction
- 3 Features
- 4 What's Include
- 5 Ports and Interface
- 6 Specifications
- 7 Connection Diagram
- 8 Maintenance
- 9 Warranty
- 10 Mail-In Service
- 11 Limited Warranty Limits and Exclusions
- 12 Customer Support
- 13 Documents / Resources
  - 13.1 References

## Safety Instructions:

- Before using this product, please carefully read the following safety instructions to ensure its proper use and keep this manual for future reference:
- To prevent electric shock, do not attempt to open the product.
- Only qualified personnel should perform any repairs or maintenance.
- Always place the product on a stable, flat surface to prevent it from falling.
- Do not expose the product to water, moisture, or high-humidity environments to avoid the risk of damage.
- To prevent damage from direct sunlight or high temperatures, do not expose the product to such environments.
- Do not place the product near heat sources like radiators, heat registers, stove, or other heat-producing

apparatus.

- Do not place any objects on top of the product to avoid damage.
- Use only the attachments and accessories specified by the manufacturer.
- During lightning storms or prolonged periods of disuse, unplug the power supply to prevent damage.

## Introduction

The JTECH-4K120EX HDMI over Ethernet extender helps deliver 4K UHD resolution at 120Hz up to 150ft. over a single CAT 6/7 cable. With support for HDR, you can now enjoy your favorite content in its full glory at 4 times the distance compared to a standard HDMI Cable. Bi-directional IR feature allows you to control your source device from the display's location using the source devices remote, or control your display from the source device's location using the display remote.

Take advantage of the 2 EDID settings provided by the JTECH-4K120EX extender. Choose between "STD" mode for 4K 120Hz, or use the "TV" mode for EDID pass-through to the display. HDCP 2.3 (backwards compatible with 2.2 and 1.4) ensures compatibility with a wide variety of compatible sources and displays.

## Features

- Supports UHD resolution up to 4K@120Hz YUV 4:4:4 with DSC function up to 150ft.
- HDCP 2.3, HDCP 2.2, and HDCP 1.4 compliant
- Supports High Dynamic Range (HDR) video
- EDID and HDCP bypass
- Digital stream conversion (DSC) function and compatible with DSC 1.2a
- High data transfer rate up to 8Gbps per channel (32Gbps all channels)
- TMDS clock can be up to 800MHz
- Supports 12-bit per channel (36-bit all channels) deep color
- Supports uncompressed audio such as LPCM
- Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio and Dolby True-HD)

## What's Include

- (1) x Transmitter
- (1) x Receiver(1) x IR TX Cable
- (1) x IR RX Cable
- (2) x DC 12V Power Adapters
- (1) x User Manual

## Ports and Interface

### Transmitter



1. **IR In:** IR signal input port
2. **IR Out:** IR signal output port
3. **HDMI Input:** Connect to HDMI source device
4. **Reset:** Short press to reset
5. **STD / TV:** Select "STD" mode for 4K 120Hz or "TV" to pass-through to TV EDID
6. **RJ45 OUT:** UTP cable output connection port
7. **Power:** Power LED indicator
8. **DC 12V:** DC 12V input

## Receiver




1. **IR In:** IR signal input port
2. **IR Out:** IR signal output port
3. **HDMI Output:** Connect to HDMI display
4. **Reset:** Short press to reset
5. **RJ45 IN:** UTP cable input connection port
6. **Power:** Power LED indicator
7. **DC 12V:** DC 12V in

## Specifications

Input Ports	1 x HDMI, 1 x RJ45, 2 x 3.5mm
Output Ports	50 / 60Hz
Extension Distance	50 / 60Hz
Vertical Frequency Range	50 / 60Hz
IR Frequency Range	20-60KHz
Interlaced Resolutions (50 & 60Hz)	480i, 576i, 1080i
Progressive Resolutions (50 & 60Hz)	480p, 576p, 720p, 1080p, 4K60Hz/ 4K120Hz
Limited Warranty	1 Year Parts and Labor
Limited Warranty	0° ~ 50°C
Storage Humidity	5 – 90% RH non-condensations
Power Supply	DC 12V
Power Consumption (Max)	TX: 4W, RX: 3.5W
Extender Unit Cert	FCC, CE, RoHS
Power Supply Cert	FCC, CE, RoHS
Dimensions (L x W x H)	W-3.3" x H-2.52" x D-0.57"
Net Weight	TX/RX: 0.26lbs
Material	Metal
User Manual	User Manual

## Connection Diagram

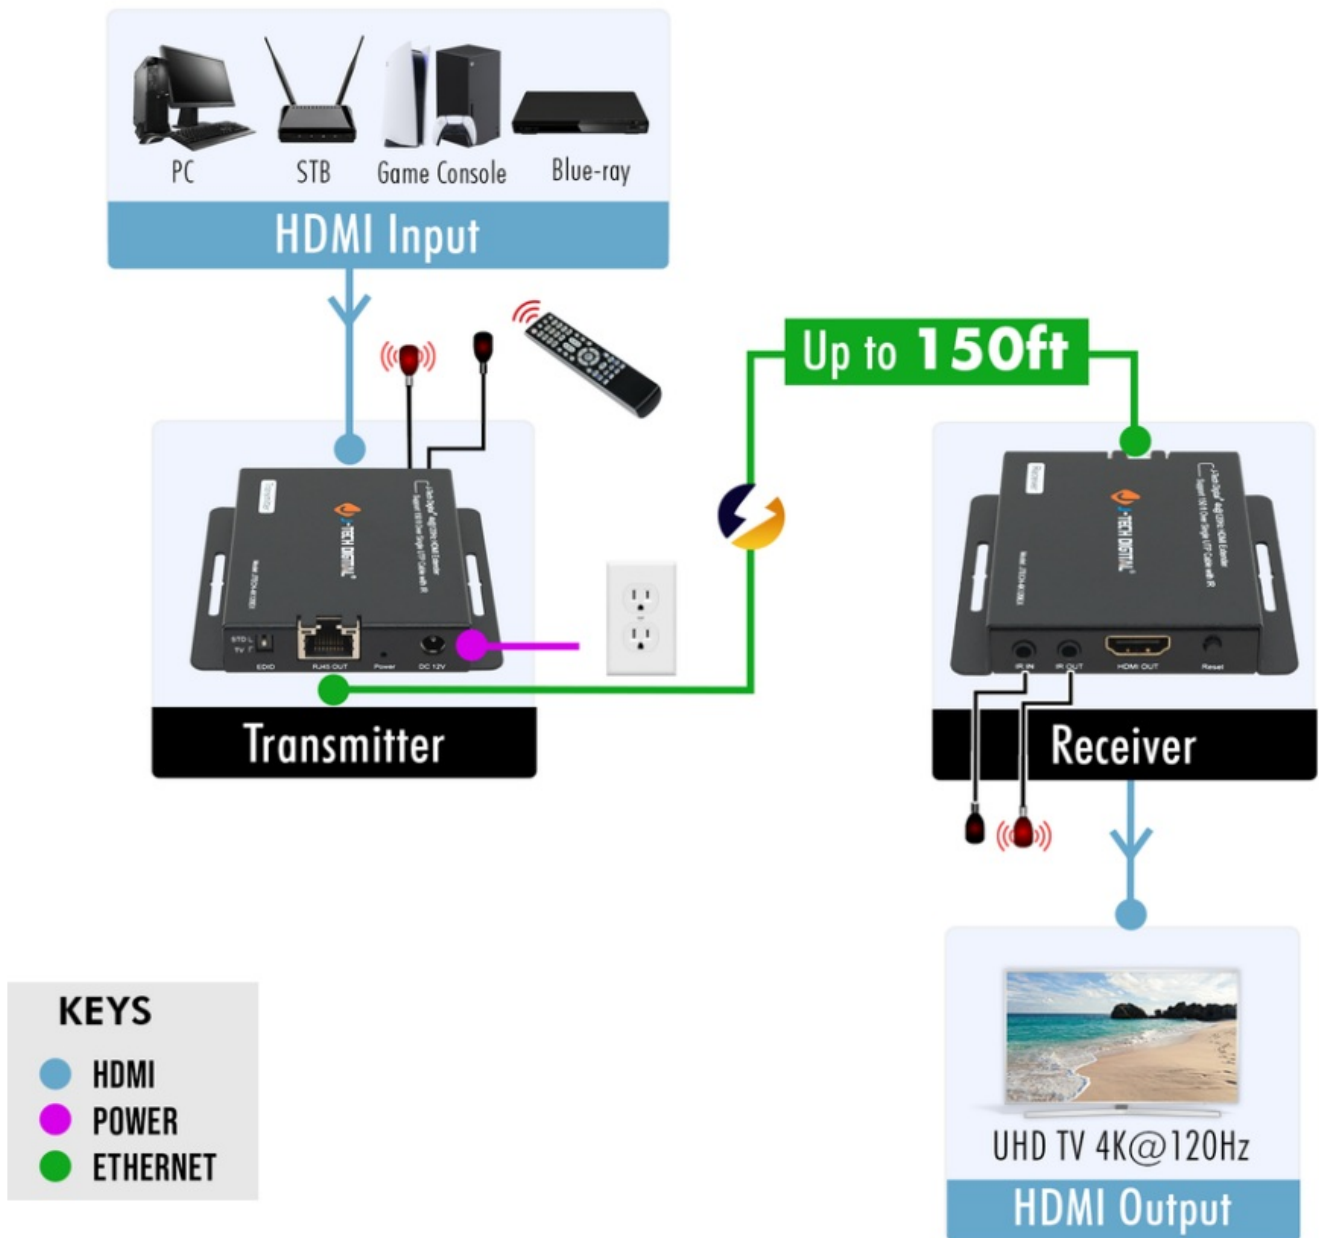

## Maintenance

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner, or benzene to clean.

## Warranty

If your product does not work properly because of a defect in materials or workmanship, our company (referred to as "the warrantor") will, for the length of the period indicated as below, "Parts and Labor (1) Year", which starts with the date of original purchase ("Limited Warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor.

During the "Labor" limited warranty period, there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers products purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

## Mail-In Service

When shipping the unit, carefully pack and send it prepaid, adequately insured, and preferably in the original carton. Include a letter detailing the complaint and provide a day time phone and/or email address where you can be reached.

## Limited Warranty Limits and Exclusions

This Limited Warranty ONLY COVERS failures due to defects in material or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The Limited Warranty ALSO DOES NOT COVER damages which occurred in shipment, or failures which are caused by products not supplied by warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, mis- adjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service center or other Authorized Servicer, or damage that is attributed to acts of God.

There are no express warranties except as listed under "Limited Warranty Coverage". The warrantor is not liable for incidental or consequential damages resulting from the use of this product or arising out of any breach of this warranty. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the service, loss of or damage to media or images, data or other recorded content. The items listed are not exclusive but are for illustration only). Parts and service, which are not covered by this limited warranty, are your responsibility.

## Customer Support



Scan the QR code below or visit  
<https://resource.jtechdigital.com/products/3023>  
to view and access detailed digital  
resources regarding this unit



[WWW.JTECHDIGITAL.COM](http://WWW.JTECHDIGITAL.COM)

PUBLISHED BY J-TECH DIGITAL INC  
9807 EMILY LANE  
STAFFORD, TX 77477  
TEL: 1-888-610-2818

E-MAIL: [SUPPORT@JTECHDIGITAL.COM](mailto:SUPPORT@JTECHDIGITAL.COM)



## Documents / Resources





**[J-TECH DIGITAL JTD-3023 HDMI Over Ethernet Extender](#)** [pdf] User Manual  
JTD-3023, JTD-3023 HDMI Over Ethernet Extender, HDMI Over Ethernet Extender, Over Ethernet Extender, Ethernet Extender, Extender

## References

- **[B J-Tech Digital ® Official Site | Professional AV Solution Provider](#)**
- **[User Manual](#)**

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.