


CF / US Echo II

Itron's innovative mobile flanges

Now also available for heat meters


NEW!
FROM Q4-2014

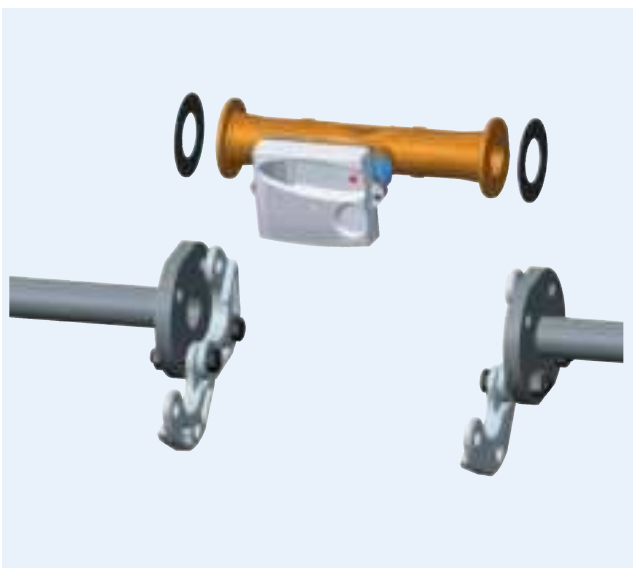

- » Installation in 3 steps
- » Fast, secure, simple
- » Moving flanges
- » All Flange meters DN25-50

1

IT'S SO SIMPLE

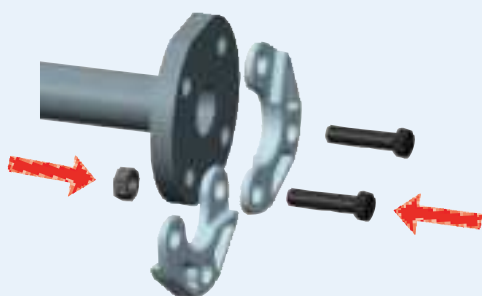

- » Hold the 2 flange segments together and place two bolts in the two lower holes, fix the nuts by hand.




- » The flat side of flange should show be oriented to the counter flange.



- » Leave the flanges open.

2

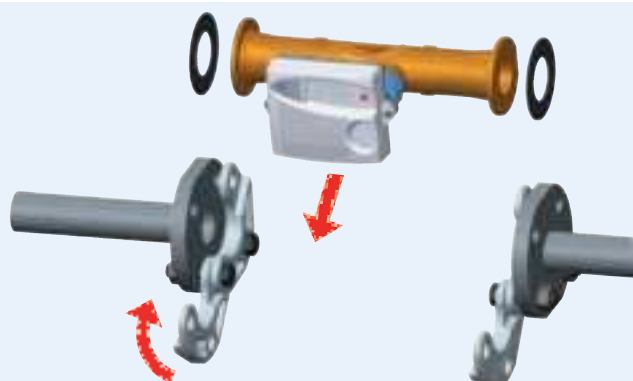


- » Place the meter into the open flanges.
- » Close the flanges.


Attention:

Don't forget the gaskets!

3

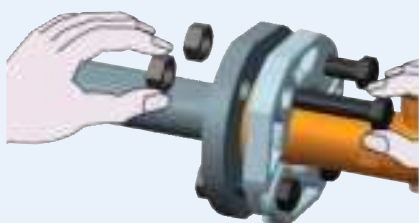

» Fix the remaining bolts.

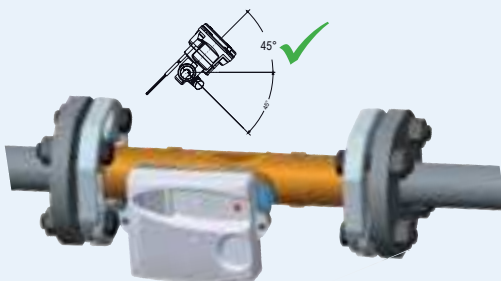

» Align the flow meter in the correct position (electronics $\pm 45^\circ$ from horizontal position).



» Fix the screws.

» READY!

THE NEW CF-/US-ECHO II IN NEW A CLEAR PACKAGING

» The clear packaging for CF-/ and US-Echo II gives you a quick overview and a simple assignment for the installation



Itron

Create a more resourceful world. Visit itron.com to learn more.

ALLMESS GMBH

Am Voßberg 11
23758 Oldenburg i.H.
Deutschland

Tel: 0 43 61/62 5-0
Fax: 0 43 61/62 5-250

[www. itron.com/de](http://www.itron.com/de)

While Itron strives to make the content of its marketing materials as timely and accurate as possible, Itron makes no claims, promises, or guarantees about the accuracy, completeness, or adequacy of, and expressly disclaims liability for errors and omissions in, such materials. No warranty of any kind, implied, expressed, or statutory, including but not limited to the warranties of non-infringement of third party rights, title, merchantability, and fitness for a particular purpose, is given with respect to the content of these marketing materials. © Copyright 2014, Itron. All rights reserved. TS: 04/2014 · Druck: 04/2014 · P0336 · HE 0057.0-EN-04.14