



JL AUDIO MMR-25W  
Wireless Remote  
Controller



# JL AUDIO MMR-25W Wireless Remote Controller Instruction Manual

[Home](#) » [JL AUDIO](#) » JL AUDIO MMR-25W Wireless Remote Controller Instruction Manual 

## Contents

- [1 JL AUDIO MMR-25W Wireless Remote Controller](#)
- [2 TOOLS](#)
- [3 Instruction](#)
- [4 Installation Considerations](#)
- [5 Pairing Remotes](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)



**JL AUDIO MMR-25W Wireless Remote Controller**



**JL Audio MMR-25W**  
**Wireless Remote Controller with Bluetooth® Technology**

**Available in multiple languages**

**Specifications**

Item	Quantity
Remote Controller	1
Mounting Bracket	1
Screws	2
Battery (CR2032 3V)	1
Drill Bit (1/16 in, 1.50 mm)	1

**Installation Instructions**

**Battery Installation**

Insert the CR2032 3V battery into the remote controller by following the diagram provided. Ensure the battery is placed correctly with the positive side facing up.

**Mounting the Remote**

1. Attach the mounting bracket to the desired location using the screws provided.
2. Use the drill bit to create pilot holes if necessary.
3. Secure the remote controller onto the bracket.

**Warnings**

- Do not ingest battery, Chemical Burn Hazard.
- This product contains a coin/button cell battery. If swallowed, it can cause severe internal burns in just 2 hours

and can lead to death.

- Keep new and used batteries away from children.
- If the battery compartment does not close securely, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

## Installation Considerations

- Installation requires appropriate tools and safety equipment. Professional installation is recommended.
- This product is water-resistant. Do not submerge or subject to high-pressure water spray.
- Do not mount in areas of extreme heat.
- Mount this product securely to prevent damage or injury in severe conditions.
- Before cutting or drilling, check for potential obstacles behind mounting surfaces.

## Pairing Remotes

Up to eight remotes can be paired to a single source unit, with each operating up to 35 ft (11 m) away. Additional remotes sold separately.

Step	Action	Result
1	Initiate Remote Pairing Mode from your MediaMaster® settings	
2	Press for 5 seconds on MMR-25W to enter Remote Pairing Mode	Zone LEDs will pulse slowly
	Short press to exit Remote Pairing Mode	

\*Includes total capacity of ALL paired Bluetooth® devices (remotes, streaming sources, app controllers, etc.).

## General Controls

Button	Function
<b>SOURCE</b>	<ul style="list-style-type: none"> <li>• Short press to turn ON</li> <li>• Long press to turn OFF</li> <li>• Short press to advance through available sources</li> </ul>
<b>Play/Pause</b>	<ul style="list-style-type: none"> <li>• Short press to mute/unmute or pause/resume audio</li> <li>• Press for 5 seconds to enter Remote Pairing Mode</li> </ul>
<b>+</b>	<ul style="list-style-type: none"> <li>• Short press to increase volume</li> <li>• Long press to increase volume continuously</li> </ul>
<b>–</b>	<ul style="list-style-type: none"> <li>• Short press to decrease volume</li> <li>• Long press to decrease volume continuously</li> </ul>
<b>ZONE</b>	<ul style="list-style-type: none"> <li>• Short press to select the next zone for volume adjustment</li> <li>• Press for 5 seconds to lock/unlock on the current zone</li> </ul>
<b>Next Track</b>	<ul style="list-style-type: none"> <li>• Short press to select the next Favorite or track</li> <li>• Long press to seek/fast-forward</li> </ul>
<b>Previous Track</b>	<ul style="list-style-type: none"> <li>• Short press to select the previous Favorite or track</li> <li>• Long press to seek/fast-rewind</li> </ul>

Note: Control functionality will vary by the connected host source unit.

## FAQ

### 1. What is the range of the MMR-25W remote?

The remote can operate up to 35 ft (11 m) away from the source unit.

### 2. How many remotes can be paired to a single unit?

Up to eight remotes can be paired to a single source unit.

### 3. Is the MMR-25W water-resistant?

Yes, the product is water-resistant but should not be submerged or exposed to high-pressure water spray.


### 4. What type of battery does the remote use?

The remote uses a CR2032 3V coin/button cell battery.



### 5. Can I install the remote myself?


While installation requires appropriate tools and safety equipment, professional installation is recommended.

TOOLS

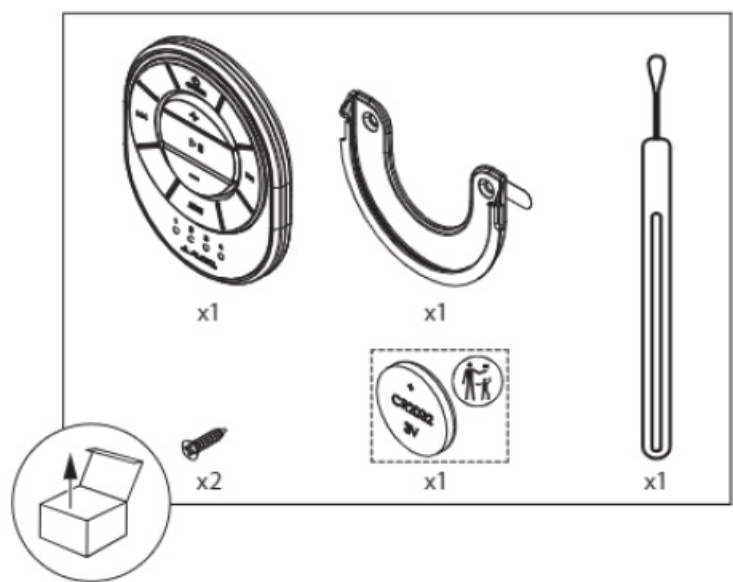

Instruction

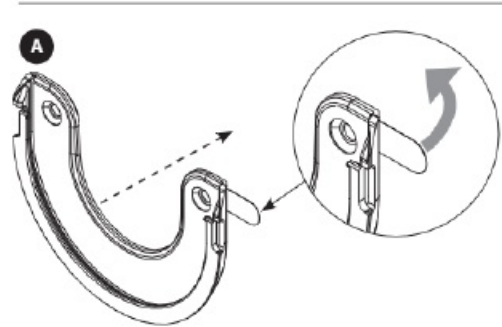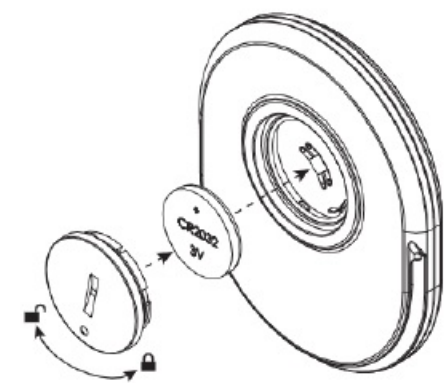

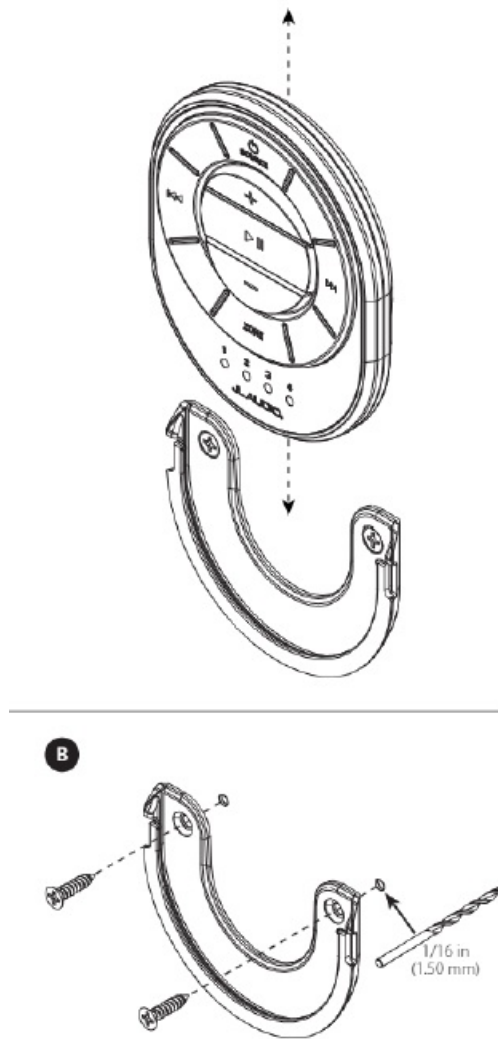

## WARNING

- Do not ingest battery, Chemical Burn Hazard.
- This product contains a coin/button ce-11 battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children.
- If the battery compartment does not close securely, stop using the product and keep it away from the child.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.


## Installation Considerations

- Installation requires appropriate tools and safety equipment. Professional installation is recommended.
- This product is water-resistant. Do not submerge or subject to high-pressure water spray
- Do not mount in areas of extreme heat.
- Mount this product securely to prevent damage or injury in severe conditions.
- Before cutting or drilling, check for potential obstacles behind mounting surfaces.








## Pairing Remotes

Up to eight remotes can be paired to a single source unit.. with each operating up to 35 ft (11 m) away. Additional

remotes are sold separately.


1	• Initiate Remote Pairing Mode from your MediaMaster® settings		
2		• Press for 5 seconds on MMR-25W to enter Remote Pairing Mode	Zone LEDs will pulse slowly
		• Short press to exit Remote Pairing Mode	

Includes total capacity of ALL paired Bluetooth• devices {remotes, streaming source.s, app controllers, etc.).

General Controls	
 <b>SOURCE</b>	<ul style="list-style-type: none"> <li>• Short press to turn ON</li> <li>• Long press to turn OFF</li> <li>• Short press to advance through available sources</li> </ul>
	<ul style="list-style-type: none"> <li>• Short press to mute/unmute or pause/resume audio</li> <li>• Press for 5 seconds to enter Remote Pairing Mode</li> </ul>
	<ul style="list-style-type: none"> <li>• Short press to increase volume</li> <li>• Long press to increase volume continuously</li> </ul>
	<ul style="list-style-type: none"> <li>• Short press to decrease volume</li> <li>• Long press to decrease volume continuously</li> </ul>
<b>ZONE</b> 	<ul style="list-style-type: none"> <li>• Short press to select the next zone for volume adjustment</li> <li>• Press for 5 seconds to lock/unlock on the current zone</li> </ul>
	<ul style="list-style-type: none"> <li>• Short press to select the next Favorite or track</li> <li>• Long press to seek/fast-forward</li> </ul>
	<ul style="list-style-type: none"> <li>• Short press to select the previous Favorite or track</li> <li>• Long press to seek/fast-rewind</li> </ul>

**NOTE:** Control functionality will vary by the connected host source Lrit.

**Documents / Resources**

 The image shows the JL Audio MMR-25W Wireless Remote Controller. It is a black, rectangular device with a circular speaker grille on the left side and a small display screen on the right. The text "JL AUDIO" is visible at the top, and "MMR-25W" is printed below it. There are also some smaller, less legible text elements and icons.	<p><a href="#">JL AUDIO MMR-25W Wireless Remote Controller</a> [pdf] Instruction Manual</p> <p>MMR-25W, MMR-25W Wireless Remote Controller, Wireless Remote Controller, Remote Controller, Controller</p>
--	---

## References

- [User Manual](#)

**Manuals+.** [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.