



## JOOM ZF-360A 3-in-1 Bluetooth Audio Transmitter/Receiver Adapter User Manual

[Home](#) » [JOOM](#) » JOOM ZF-360A 3-in-1 Bluetooth Audio Transmitter/Receiver Adapter User Manual 

### Contents

- [1 JOOM ZF-360A 3-in-1 Bluetooth Audio Transmitter/Receiver Adapter](#)
- [2 OVERVIEW](#)
- [3 What's Included](#)
- [4 Transmitter Mode](#)
- [5 Receiver mode](#)
- [6 Charging](#)
- [7 Specification](#)
- [8 FCC WARNING](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)




**JOOM ZF-360A 3-in-1 Bluetooth Audio Transmitter/Receiver Adapter**



Dear friends, thanks for choosing our products. In order to better use the functions of this product, please read this user manual before use.

## OVERVIEW

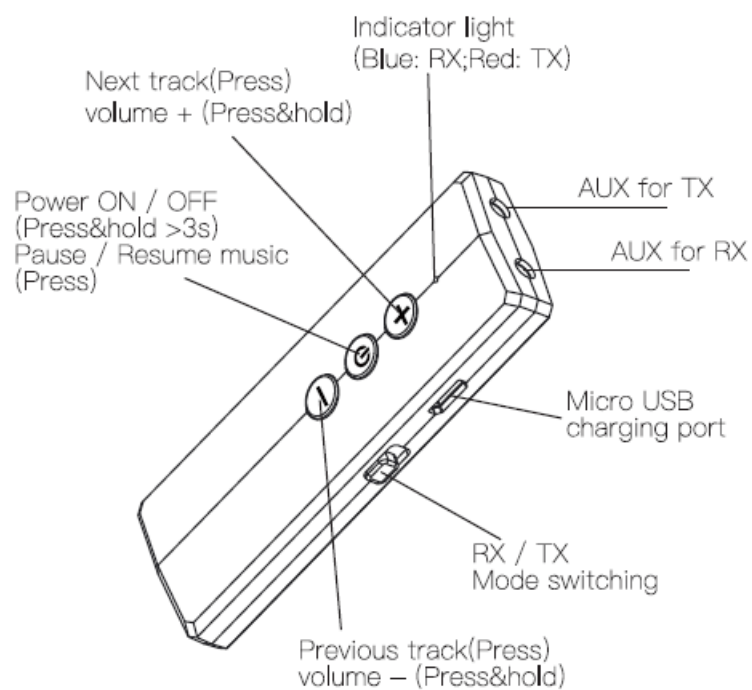


## What's Included

- 1x Bluetooth Transceiver\
- 1 x Micro USB Data Gable
- 1 x 3.5mm Audio Cable
- 1x UserManual

## Transmitter Mode


### 1. TURNON/off

1, Turn on / off

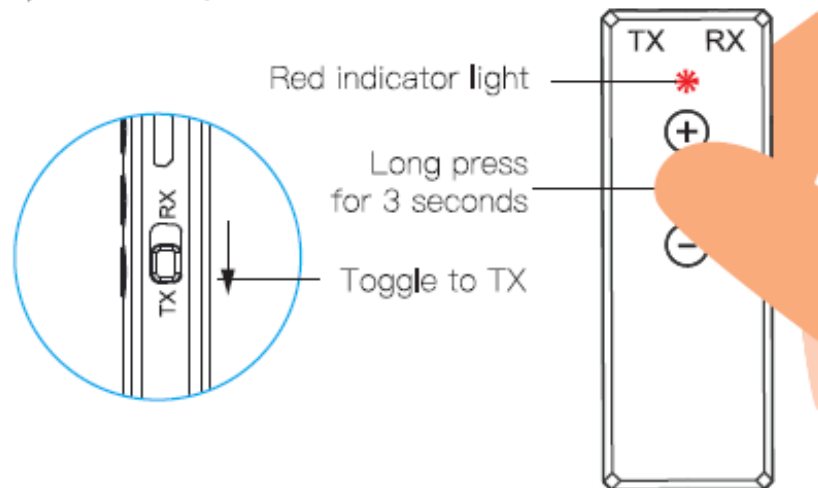


If there is no device access after turning on, the transceiver will automatically shut down in 5 minutes.

### 2. Pairing with your Bluetooth device

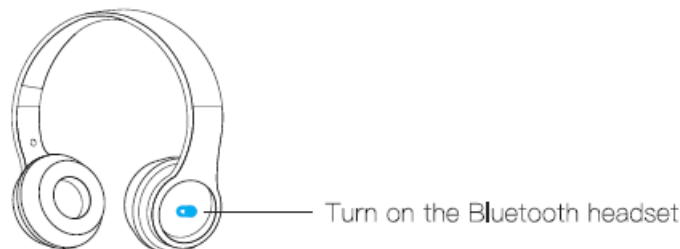

For Wireless headsets: Make sure that the headset is waiting for pairing (refer to the manual of the headset for details). \* For AirPods: Put AirPods in the charging compartment. Open the cover, then press and hold the button on the back of the charging compartment until the indicator light flashes white.

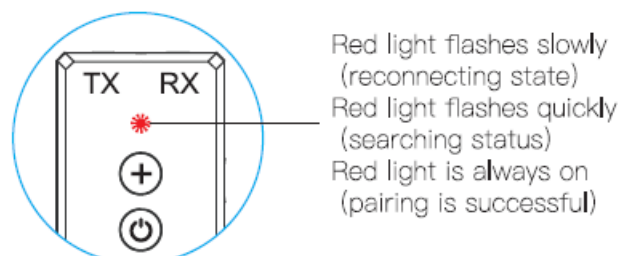

After power on, the transceiver will automatically connect to the last connected device. If the connection is unsuccessful, it will enter the searching status.


Connecting to another device, please turn off the Bluetooth of the connected device first, or press and hold the **+** and **-** buttons at the same time to enter the searching status. The transceiver will search for a new pairing.

Can't connect? Long press the power button for 8 seconds to clear the pairing record of the transceiver. Restart

and make sure that the distance between the transceiver and the Bluetooth device is not more than 1 meter before trying to pair


### 3. , Connect with audio source devices

1) With the 3.5mm audio cable

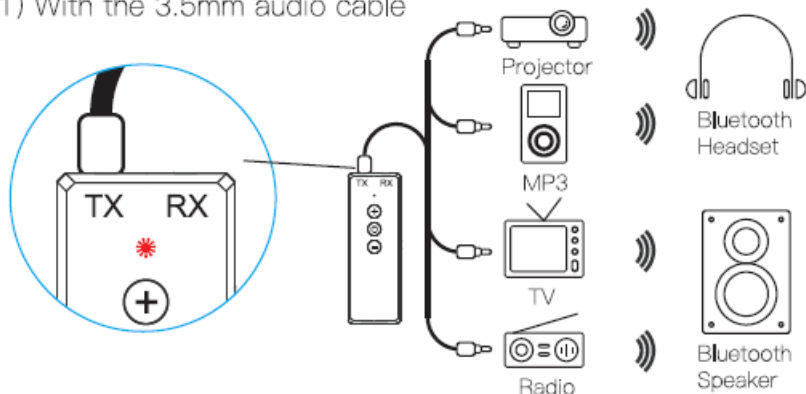

Plug one end of the 3.5mm audio cable into the audio interface {marked TX} on the transceiver, and the other end into the AUX interface on the TV or other equipment


### With the data cable

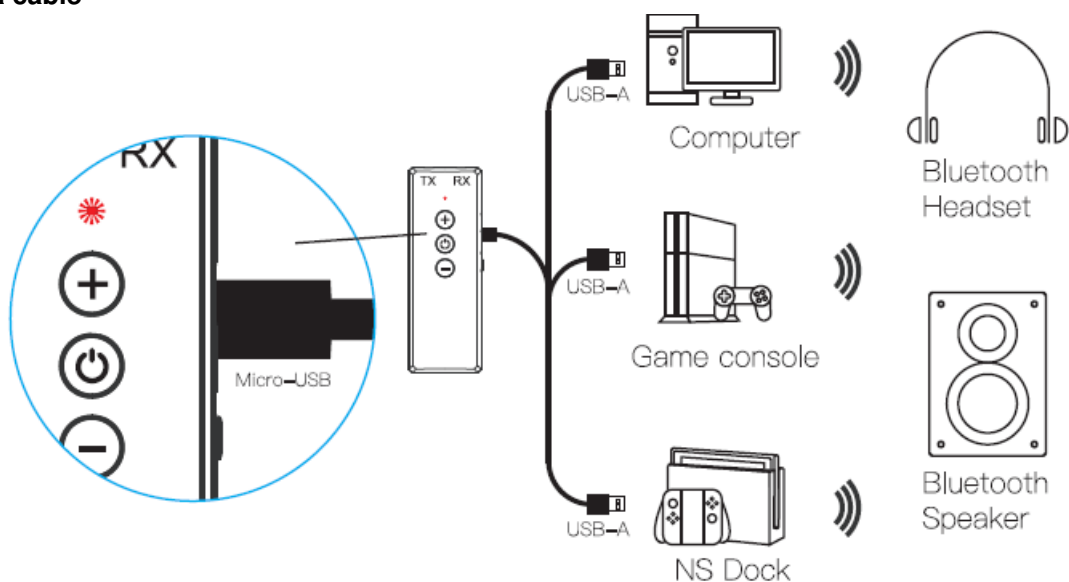

Plug one end of the data cable into the charging port of the transceiver, the other end into PC, PS4, Switch dock, and other devices that support USB audio output. (Some USB ports only support charging, Not for audio transmission.)


### Receiver mode

#### 1. Turn on /off

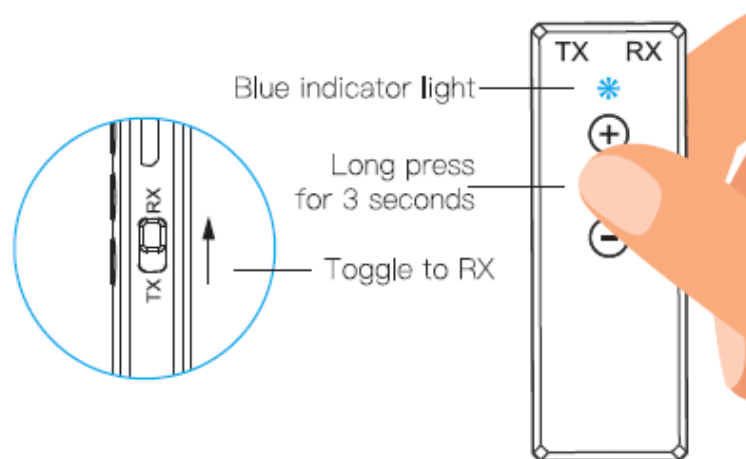


If there is no device access after turning on, the transceiver will automatically shut down in 5 minutes.

## 2. , Pairing with your Bluetooth device

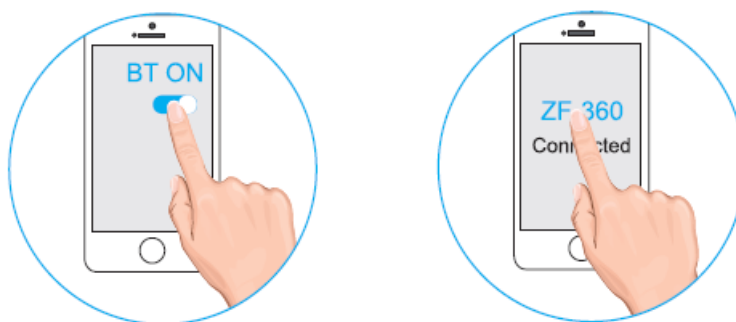


Turn on the Bluetooth of the mobile phone or other Bluetooth devices, searching for the device named “ZF-360” to connect

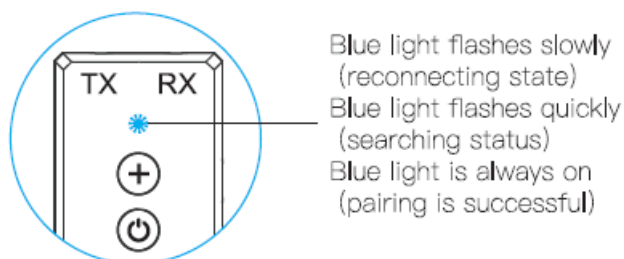

After power on, the transceiver will automatically connect to the last connected device. If the connection is unsuccessful, it will enter the searching status.

Connecting to another device, please turn off the Bluetooth of the connected device first, or press and hold **•+•** buttons at the same time to enter the searching status. The transceiver will search for a new pairing. can't connect? Long press the power button for 8 seconds to clear the pairing record of the transceiver. Restart and make sure that the distance between the transceiver and the Bluetooth device is not more than 1 meter before trying to pair


## 3. Connect with audio devices

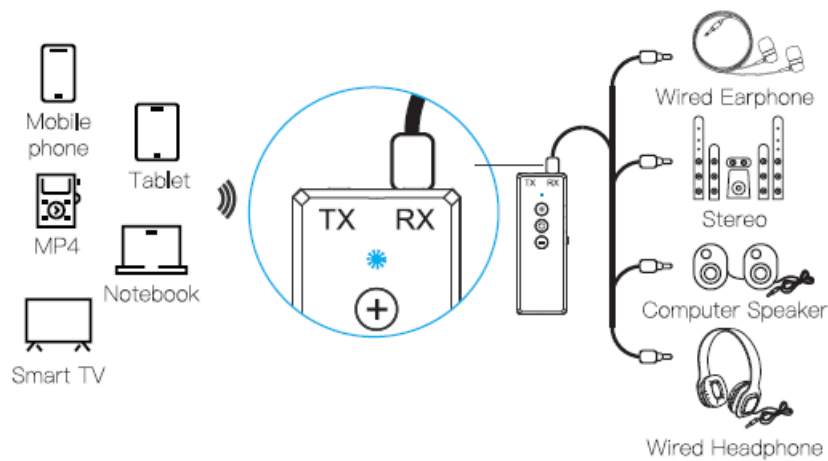

Plug the 3.5mm audio cable of the wired headset or wired speaker into the audio Interface (marked RX) on the Bluetooth transceiver

Button-+ : Previous/Press once; Volume up/Long press Button- : Next/Press once; Volume down/Long press Button "O" : Play or Pause/Press once (only for music player) \*Note: The-+--- button cannot control the volume of the computer system

## Charging

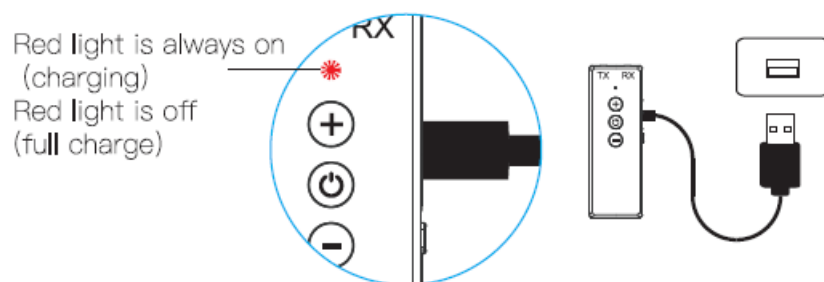

## Note:

1. No driver is required when using the computer.
2. If there is a prompt that "device cannot be recognized" when transmitting audio on the computer, it means the USB port is not properly plugged in
3. No need to use a 3.5mm audio cable when transferring audio from a computer with our USB data cable. (Some USB cables can only charge without transferring data.)
4. When using USB data cable on the computer, the volume of the computer system cannot be adjusted by the transceiver. It can only control the playback software {music player, video player}, or you can adjust the volume on your Bluetooth speaker/Bluetooth headset directly.
5. The working time in transmit mode is about 7H, and in receiving mode about 10H. When you hear the • Beep Beep, please charge it in time.
6. This device does not support voice call and voice assistant (No built-in microphone)

## Specification

- Model: ZF-360A
- Bluetooth version: Bluetooth V5.0+EDR

- Bluetooth profiles: HSP, HFP, A2DP, AVRCP(receiver mode only)
- Input: fN 1A
- Charging rt: Micro USB
- Receiver mode play time: 1 0 hours
- Transmitter mode play time: 7 hours
- Charging time: 1 hour
- Effective range: 10-15m

## FCC WARNING


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## Documents / Resources

|                                                                                     |                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><a href="#">Joom ZF-360A 3-in-1 Bluetooth Audio Transmitter/Receiver Adapter</a> [pdf] User Manual ZF-360, ZF360, 2AJH5-ZF-360, 2AJH5ZF360, ZF-360A, 3-in-1 Bluetooth Audio Transmitter, Receiver Adapter, ZF-360A 3-in-1 Bluetooth Audio Transmitter, Receiver Adapter, 681800148A</p> |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|