



## JRI Nano SPY Wireless Mini Data loggers User Guide

[Home](#) » [jri](#) » JRI Nano SPY Wireless Mini Data loggers User Guide 



**Nano SPY Wireless Mini Data loggers  
User Guide**



## Contents

- 1 INTRODUCTION
- 2 INSTALLATION
- RECOMMANDATIONS
- 3 PRODUCT DESCRIPTION
- 4 OPERATION
- 5 NANO SPY U CONNECTION
- 6 BATTERY REPLACEMENT
- 7 MAINTENANCE
- 8 TECHNICAL FEATURES
- 9 OPERATION CAPACITY
- 10 WARRANTY
- 11 MAINTENANCE CONTRACT
- 12 ENVIRONMENTAL PROTECTION
- 13 Documents / Resources
  - 13.1 References
- 14 Related Posts

## INTRODUCTION

The Nano SPY is a measuring device for 1 or 2 physical parameters (T or TH depending on the model). Data is transmitted through NANO Link or Relay/Alarm modules using wireless 2.4GHz radio signal to the JRI-MySirius monitoring software hosted on the JRI cloud or the customer's server.





The Nano SPY complies with EN 12830 with temperature probes only, and is compatible with EN 13486 which defines procedures for periodic verification.



### a) Product contents

- 1 Nano SPY
- 1 User guide

### b) Symbols

	<b>RECYCLING:</b> do not dispose of in a refuse dump or waste disposal bin. Comply with existing legislation for disposal.
	<b>Power source:</b> this device is powered by a 3.6VDC type AA lithium battery (§ ch. V).
	<b>CE LABELING:</b> this device is certified to conform to European regulations for electrical safety, flammability, disruptive electromagnetic emissions, and immunity to environmental electrical disturbances.
	<p>FCC ID : W45 12525</p> <p>This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:</p> <ol style="list-style-type: none"> <li>1. This device may not harmful interference,</li> <li>2. This device must accept any interference received, including interference that may cause undesired operation.</li> </ol> <p>The grantee is not responsible for any changes or modification not expressly approved by the party responsible for compliance.</p> <p>Such modifications could void the user's authority to operate the equipment.</p> <p><b>NOTE:</b> This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.</p>



Do not use the device under conditions other than those described in the technical specifications (Risk of fire or explosion).


For any other use than the one mentioned, please get in touch with JRI.

## INSTALLATION RECOMMANDATIONS


To ensure optimal radio transmission, a certain number of recommendations must be respected, as any wireless transmission is subject to disturbances.

### a) Sources of disturbances or attenuation

- The presence of obstacles in the wave path between the Nano SPY and the Nano SPY Link (wall, furniture, people...) or near the antenna.
- The thickness of an obstacle in the wave path. The attenuation is greater diagonally than perpendicularly.

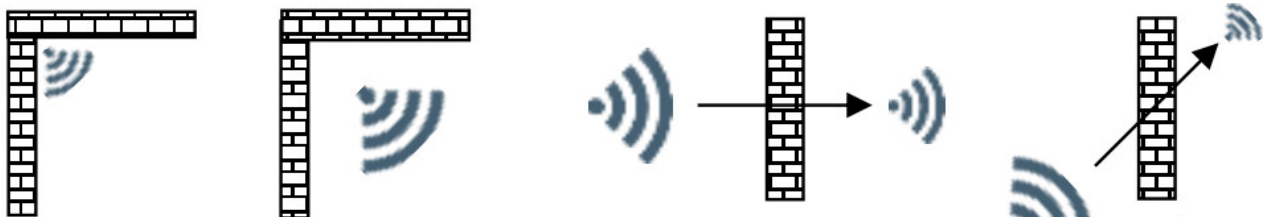

- A solid metal wall will not allow transmission by radio. A perforated metal wall will allow waves to pass while attenuating them.

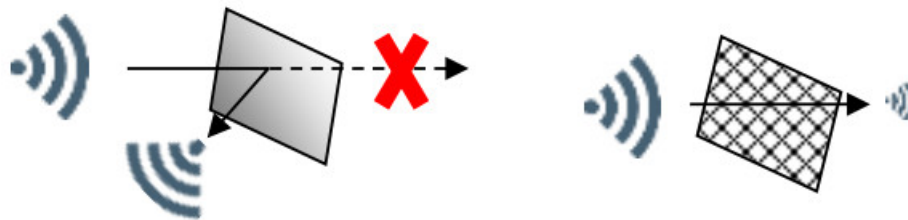

## b) Positioning


- The Nano SPY units can be placed either inside or outside the enclosures.
- For installations outside the enclosure, mount the units sufficiently high on the walls to avoid interference with obstacles and foot traffic.
- Insofar as is possible, place the Nano SPY LINK in a central position relative to the measurement points.
- Try to place them in locations where they are visible
- Never place the Nano SPY unit horizontally.
- If difficulties persist it is possible to use Nano SPY ALARMS (repeaters) or connect to another Nano SPY LINK on the Ethernet network.



To ensure your safety during installation or an intervention on a device placed in a high position, use proper equipment which is in good condition and provides adequate stability, wear appropriate, non-slip shoes and install warning signs around the work area if the intervention takes place in an area of foot traffic.

## PRODUCT DESCRIPTION

### a) Control unit

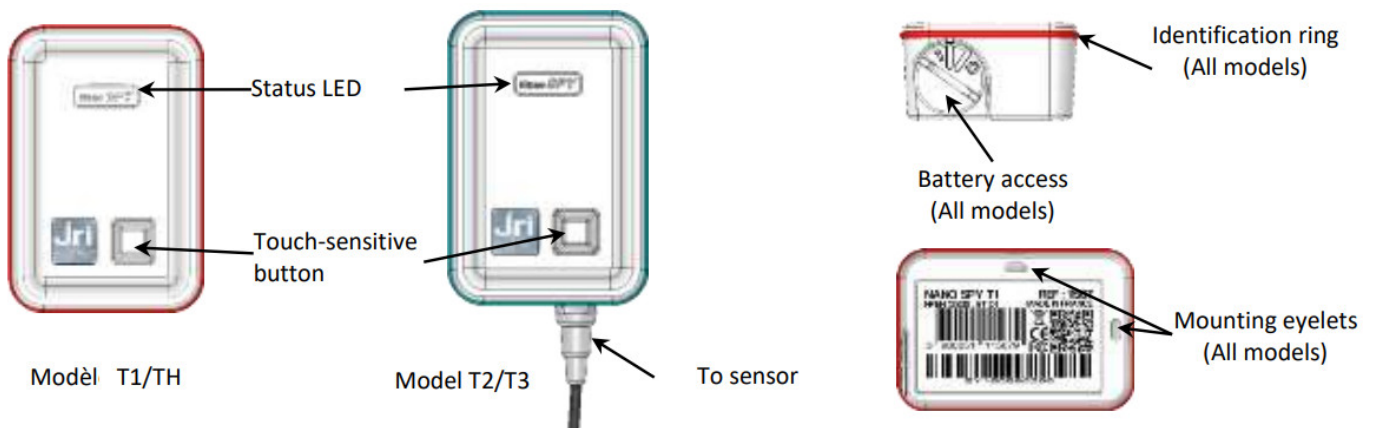

### b) Mounting

The Nano SPY can be mounted in 2 different ways

- Using a tie wrap to attach it to the monitored product



- Magnetically

The Nano SPY has 2 internal magnets for easy mounting on metallic surfaces. A protective shell is available as an option (Ref: 12715)



## OPERATION

The Nano SPY can only be used with the My Sirius software hosted on a Web platform and with a Nano SPY Link. See MySirius online help for Nano Spy configuration.

### a) Off state


As delivered, the Nano SPY is turned off. It can neither emit nor receive signals.

The Nano SPY can only be used with the My Sirius software hosted on a Web platform and with a Nano SPY Link. See MySirius online help for Nano Spy configuration.

### a) Off state


As delivered, the Nano SPY is turned off. It can neither emit nor receive signals.

### b) Activation

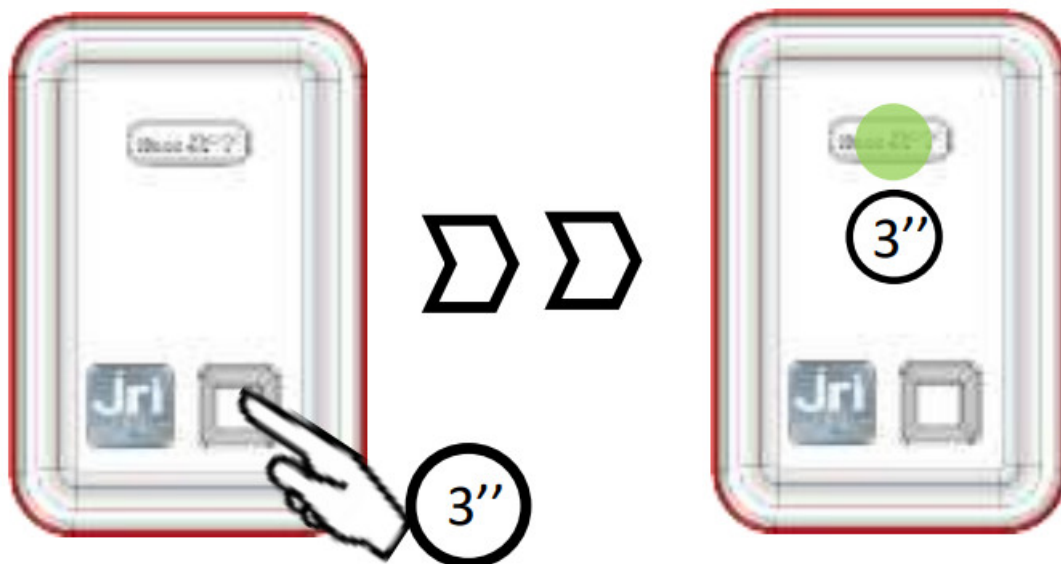





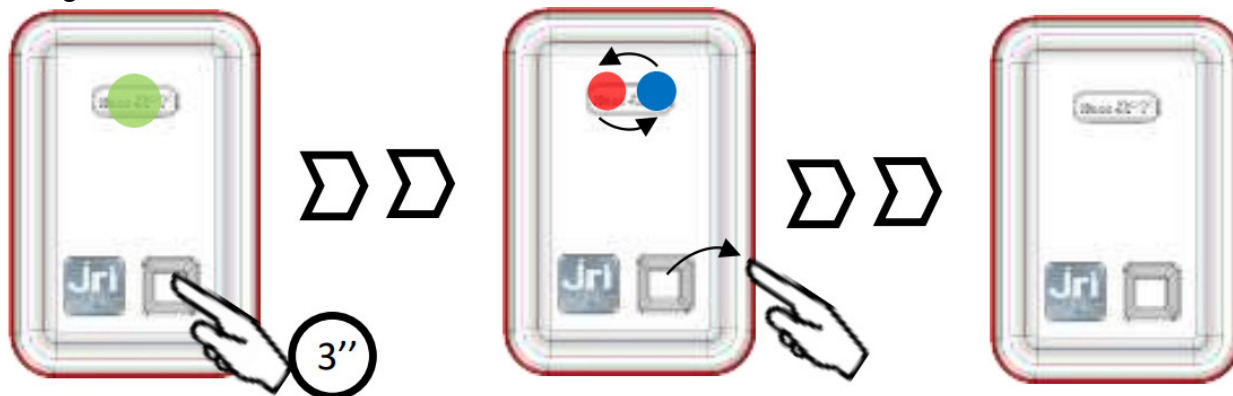


Once activated, the le Nano SPY automatically declares itself in MySirius if it is contact with a Link. It starts to measure and transmit its measurements to My Sirius, at the frequency defined in MySirius, then flashes regularly as a function of its status.

### c) Turning Off



### d) Actions on the touch button

Press sensitive bouton Mode	< 3"	> 3"	>8"
Activation	—	 during 3"	 during 3" Thee Nano SPY re mains
Mesurement	 1" = OK  1" = Technical alarm  3×1" = OK but paused  1" = In alarm state	Off	
Off (If authorized by program)	—		

If the authorization of turning off the device is not programmed via MySirius then it will be not possible to turn off the Nano Spy.



Using active, corrosive or flammable products or solutions (e.g. acid or petroleum) on JRI equipment is prohibited.

The JRI equipment is designed for mapping and monitoring the temperature and humidity of thermal or climatic enclosures within limits described in their technical data sheet.


For the maintenance of these devices, please refer to the dedicated section. For any other use than the one mentioned, please get in touch with JRI.

## NANO SPY U CONNECTION

The Nano SPY Universal is equipped with a 4-wires cable facilitating connection to terminal blocks of sensors with analog outputs. These sensors can, if necessary, be disconnected from the logger for replacement or for the exchange of the logger itself.

An IP67 Binder connector (optional) can be used to facilitate the connection of the sensors.

### NANO SPY U

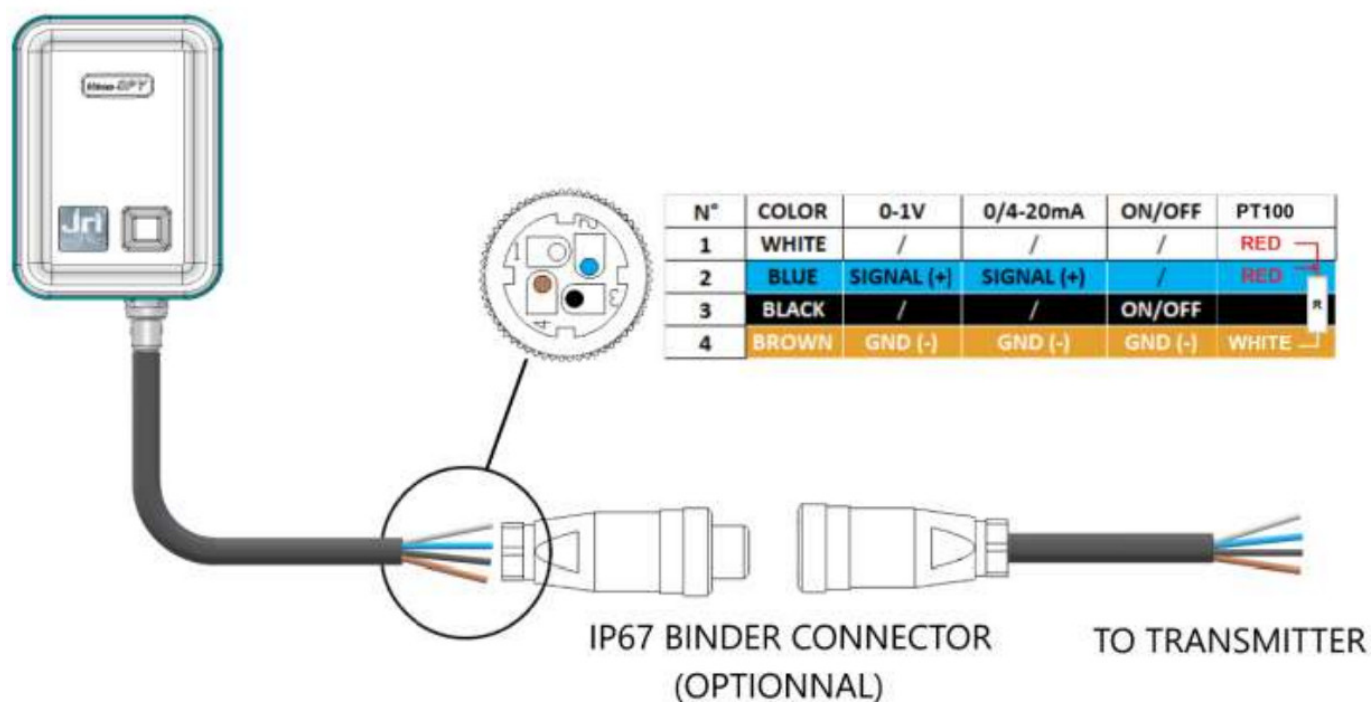



Connect only sensors compatible with the technical characteristics of the devices

For sensors with 0-1V and 0-20mA outputs, there's no probe failure detection → the NANO SPY U doesn't trigger sensor default alerts.

## BATTERY REPLACEMENT

### Removing the battery

Open the battery cover **1** with a suitable object (coin) to align the marks (/!\0 = Open ; 1= Closed)

Remove the battery **2** from its lodging

### Replacing the battery

Put the new battery in place respecting the polarity **3**.

Battery detection is confirmed by the activation of the red LED **4** for few seconds. The device can be activated after the extinction of the red LED.



KEEP THE BATTERY AWAY FROM FIRE, DO NOT ATTEMPT TO RECHARGE IT OR SHORT-CIRCUIT IT  
THE BATTERY MUST BE A LITHIUM 3.6V TYPE AA BATTERY.

USE PREFERABLY THE BATTERIES\* SUPPLIED BY JRI (PART NBR: 11596)

\*Recommended batteries: Saft LS14500 type AA 3.6V 2250mAh

## MAINTENANCE

Clean the device with a soft cloth, either dry or slightly moistened with water. To remove stubborn dust, use a cloth soaked in a diluted, non-abrasive detergent. Then wipe carefully with a soft dry cloth. Never use benzene, thinner, alcohol or any type of solvent, which can cause discoloration or deformation of the surfaces.

## TECHNICAL FEATURES

### a) Common features:

**HMI:** 1 RGB LED + 1 sensitive bouton

**Frequency band:** 2.4GHz (from 2400 to 2483.5 MHz)

**Maximum Radio Power:** 10 dBm

**Memory:** 10 000 timestamped measures

**Resolution:** 0.01

**Dimensions:** 63 mm x 42 mm x 25 mm

**Case:** Polycarbonate – Food Contact

**Power source:** 3,6v Lithium battery up to 6 years life time battery, depending on usage

**Weight:** ~ 60g

### b) Specific features:

#### Nano SPY T1 Temperature (internal probe)



**Sensor:** PT100 sensitive element inside unit

**Operating range:** from -40°C to +85°C

**Measurement range:** from -40°C to +85°C

**Accuracy, standard version:**  $\pm 0.4^{\circ}\text{C}$  from -20°C to +40°C /  $\pm 0.5^{\circ}\text{C}$  outside this range

**IP rating:** IP 68

**Frequency of measurement and transmission:** adjustable from 1 min to 12h

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 10 min. to 90% of the variation

**Standard calibration points:** -25°C/+5°C/+25°C

#### Nano SPY TH (Thermo-Hygro)



**Sensor:** inside unit

**Operating range:** from -30°C to +70°C

**Measurement range:** from -30°C to +70°C and 0-100%HR

**Accuracy, standard version**

**Temperature:**  $\pm 0.4^{\circ}\text{C}$  from -20°C to +40°C /  $\pm 0.5^{\circ}\text{C}$  outside this range

**Humidity at T° from 15 to 25°C**  $\pm 4\%$  HR from 20% to 80%

**From 20% to 80% HR**  $\pm 5\%$  HR outside of the range

**IP rating:** IP 40

**Frequency of measurement and transmission:** adjustable from 1 min to 12h

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 5 min. to 90% of the variation

**Standard calibration points:** +2°C/+25°C/+38°C and 20%/50%/80% at 23°C

#### Nano SPY T2 Remote temperature



**Sensor:** PT100 external probe, non-withdrawable Ø5x20mm

**Operating range:** from -30°C to +70°C

**Measurement range, standard version:** from -50°C to +105°C

**Measurement range, incubator version:** from +30°C to +50°C

**Accuracy, standard version:**  $\pm 0.3^{\circ}\text{C}$  from -20°C to +30°C /  $\pm 0.5^{\circ}\text{C}$  outside this range

**Accuracy, incubator version:**  $\pm 0.2^{\circ}\text{C}$  from +30°C to +50°C /  $\pm 0.5^{\circ}\text{C}$  outside this range

**IP rating:** IP 65

**Cable length:** Flat cable Sentroprene 30 cm, 3 m and 8 m

**Frequency of measurement and transmission:** adjustable from 1 min to 12h

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 2 min. to 90% of the variation

**Standard calibration points, standard version:** -30°C/+5°C/+40°C

**Standard calibration points, incubator version:** +36°C/+38°C/+45°C

#### Nano SPY Reference



**Sensor:** External Class A PT 100 – stainless steel Ø2,9x25mm

**Operating range:** from -20°C to +50°C

**Measurement range:** from -196°C to +150°C

**Accuracy:**  $\pm 0.15^{\circ}\text{C}$  from 0°C to +40°C,  $\pm 0.2^{\circ}\text{C}$  from -30°C to 0°C and from +40°C to +150°C,  $\pm 0.5^{\circ}\text{C}$  out of this range,  $\pm 0.6^{\circ}\text{C}$  to -196°C

**IP rating:** IP 65

**Cable length:** 3 m

**Frequency of measurement and transmission:** 1 min

**Frequency of recording:** Adjustable from 1 min to 24h

**Response time:** ~ 2 min

**Standard calibration points:** +15°C/+45°C

#### Nano SPY T3 Extreme temperature data logger



**Sensor:** PT100 external probe, non-withdrawable

**Operating range:** from -20°C to 50°C

**Measurement range:** from -200°C to +200°C

**Accuracy, Low temperature version:**  $\pm 0.2^{\circ}\text{C}$  from -20°C to 0°C and  $\pm 0.5^{\circ}\text{C}$  outside this range

**Accuracy, High temperature version:**  $\pm 0.3^{\circ}\text{C}$  from 0°C to +100°C and  $\pm 0.5^{\circ}\text{C}$  outside this range

**IP rating:** IP 65

**Cable length:** 50 cm and 3 m

**Frequency of measurement and transmission:** adjustable from 1 min to 12h

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 2 min. to 90% of the variation

**Standard calibration points, Low temperature version:** -80°C/-10°C

**Standard calibration points, High temperature version:** +20°C/+100°C

#### Nano SPY TH High Accuracy



**Sensor:** Sensitive element PT 1 000, 1/3 B class, HYGROMER HT-1 cable length: 2m

**Operating range:** from -40°C to +85°C

**Measurement range:** from -40°C to +85°C and 0-100 %HR

**Accuracy:** Refer to the technical data sheet

**IP rating:** IP 65

**Cable length:** 2 m

**Frequency of measurement and transmission:** adjustable from 1 min to 12h

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 15 seconds without filter to 90% of the variation

#### **Nano SPY Door contact**



**Sensor:** Magnetic door contact

**Operating range:** from -40°C to +85°C

**Accuracy:** Refer to the technical data sheet

**IP rating:** IP 65

**Cable length:** 20 cm

**Frequency of measurement and transmission:** 1 min

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 1,7 milliseconds

#### **Nano SPY Digital**



**Sensor:** External to control unit

**Operating range:** from -25°C to +70°C

**Measurement range:** According to the type of JRI digital probe

**Accuracy:** Accuracy of the JRI digital probes

**IP rating:** IP 65

**Cable length:** N/A

**Frequency of measurement and transmission:** adjustable from 1 min to 12h

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 2 min. to 90% of the variation

**Standard calibration points:** +20°C/+100°C

**Nano SPY TWIN, 2 Channels: Internal PT100 probe + External PT100 probe – non-withdrawable Ø5x20mm**



**Sensor:** Internal PT100 probe

External PT100 probe – non-withdrawable Ø5x20mm

**Operating range:** from -30°C to +70°C

**Measurement range, Ambient probe – Internal:** from -30°C to +70°C

**Measurement range, PT100 Probe – External:** from -50°C to +105°C

**Accuracy, Ambient probe – Internal:** ±0.4°C from -20°C to +40°C and ±0.5°C out of this range

**Accuracy, PT100 Probe – External:** ±0.3°C from -20°C to +30°C and ±0.5°C out of this range

**IP rating:** IP 65

**Cable length:** 3m

**Frequency of measurement and transmission:** adjustable from 1 min to 12h

**Frequency of recording:** adjustable from 1 min to 24h

**Response time:** ~ 2 min. to 90% of the variation

**Standard calibration points:** -30°C / 0°C / +40°C

**Nano SPY Universal**



#### Input type:

<b>PT100 input</b> measurement range: resolution: accuracy (not including probe):	An adjustment of the measurement chain is mandatory From -200°C to +300°C 0,01°C ± 0,2°C from -20°C to +50°C ±0,3°C from -80°C to -20°C and from +50°C to +140°C ± 0,5°C beyond these ranges
<b>Current input</b> measurement range: resolution: accuracy (control unit only):	(No detection of probe failure for 0-20mA input) From 0 to 20 mA or 4-20mA 0,001 mA ± 0,01 mA
<b>Voltage input</b> measurement range: resolution: accuracy (control unit only)	(No detection of probe failure for 0-1 V input) 0 à 1V 0,1 mV ±0.5 mV
<b>On/Off or Counting input</b> Type of input measurement range: resolution: accuracy	Dry contact or 0-3,3V max 0 à 65535 – signal from 0 to 200Hz 1 ±1

**Operating range:** from -20°C to 50°C

**IP rating:** IP 65

**Cable length:** 2 m

**Frequency of measurement and transmission:** adjustable from 5 sec to 12h

**Frequency of recording:** adjustable from 1min to 24h

**Response time:** according to sensor

**Connection:** Using a Binder IP67 connector (ref : 12617) or directly on the analog output

#### c) Compliance

JRI declares that all our radioelectric devices from the NANO SPY range (T1,T2,T3,TH) are in compliance with the following standards:

EN 12830	These devices must be verified regularly according to EN13486 (recommended once per year)
FCC	<p>FCC ID : W45 12525</p> <p>This device complies with part 15 of the FCC rules. Operation is subject to the following two condition:</p> <ol style="list-style-type: none"> <li>1.This device may not harmful interference,</li> <li>2.This device must accept any interference received, including interference that may cause undesired operation.</li> </ol> <p>The grantee is not responsible for any changes or modification not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.</p> <p><b>NOTE:</b> This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.</p>
CE ERM	EN 301489-1 & -17/EN 61010-1/EN 62479/EN 300328(T1, T2, T3, TH, U, TH High Accuracy) / ETS 300-328 (TH, T3, T2, T1, Reference, Door contact)
2014/53/UE	A copy of the full EU compliance statement can be requested by email: <a href="mailto:info@group-mms.com">info@group-mms.com</a>
IC CANADA	<p>This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.</p> <p>This equipment should be installed and operated such that a minimum separation distance of 20 cm is maintained between the radiator (antenna) and user's/nearby person's body at all times.</p>

## OPERATION CAPACITY

### FITNESS FOR USE SHEET ACCORDING TO STANDARD 12830

Capacity of operation compliant to EN 12830

**model:** Nano SPY T1

**equipment type:** temperature recorder

**application:** storage

**environment:** C

**accuracy class:** 1

**Test table**

<b>Trials</b>	<b>δ Norms</b>	<b>Requirements</b>	<b>Characteristics</b>	<b>Documents or test report</b>
Determination of the error of the temperature range.	5.3	±1°C	±0.5°C	Metrological qualification report R QCC16001
Determination of response time.	5.4	<60'	10'	JRI RECC16003 test report
Determination of the relative time registration error.	5.5	1%	0.002%	JRI RECC 16005 test report
Variation of the supply voltage. (Equipment subjected to atmospheric temperatures)	5.6.2	3,2V 13.6V -30°C 1 +30°C	2,7 V i 3,6V -40°C 1 +85°C	JRI RECC16005 test report
Influence of ambient temperature. (Recorder under = at extreme temperatures)	5_6.3.3	-40°C 1 +50°C	-40°C i +85°C	JRI RECC 16003 test report
Temperature test with recording in storage and transport condition.	5.6.4	-40°C 1 +60°C	-40°C 1 +85°C	JRI RECC16003 test report
Impact resistance.	5.6.5	EN 60068-2-27	N/A	Not recognized for storage
Mechanical vibrations	5.6.6	EN 60068-2-27	N/A	Not required for storage
Degrees of protection provided by the enclosure.	5.6.7	IP55 selon EN 60529		Test report /RI RECC 16005
Electrical safety	5.6.8	EN61010-1: 2010		EMITECH RS-031-PNC-16-10327 6-2-A test report. pdf
Ripdite chelectrique.	5.6.9	NA	INS	
Electromagnetic compatilatine.	–	EN 301489-17 V2.2.1: 2012 EN 301489-1 V1.9.2: 2011 EN 55024: 2010 / AI 2015		EMITECH TC-032-PTC-I5-16147-1-1 test report. pdf

#### **Pour JRI**

**The Technical and Quality Director:** Technical and quality manager



Date : 23101/2017

#### **WARANTY**

Our material is guaranteed for one year, parts and labor, against any manufacturing defect, functional failure or abnormal wear. This guarantee covers only the replacement of parts recognized to be defective as well as the repair of the material in question returned shipping paid to our workshops, and excludes all damages and interest or incidental expenses.

The starting point of the guarantee is the date of invoice of the concerned product. The invoice must be provided for any request for application of the guarantee. Repairs under guarantee in no way extend the guarantee period

accorded to the product at the time of sale. Deterioration due to any abnormal usage or to storage under adverse environmental conditions is excluded from our guarantee.

## MAINTENANCE CONTRACT

### How best to optimize your radiofrequency installation?

Radiofrequency measurement systems communicate through Hertzian waves. Many factors (change in installation, moving, supplemental wall, interference with another radio system...) can nonetheless modify the radio pathway previously defined. The use of radiofrequency thus requires periodic monitoring by recognized specialists.

It is for this reason that JRI has developed for you the maintenance contract. We simplify your procedures by offering you a fully-integrated solution. This global service offer includes both maintenance and a metrological service, ensuring the optimum functioning of your devices or of your installation.

### **You'll no longer have to worry about the maintenance of your devices!**

This maintenance contract allows you to benefit, for a minimum period of 2 years, from a variety of services such as:

- annual or biannual verification of the material
- an extension of the guarantee
- tele maintenance
- technical support +33 (0) 892 680 933 (0,282 € HT/min)
- replacement of the material onsite or by a return to the factory
- verification of measurement accuracy (metrological certificate)
- battery replacement
- access to new software versions
- intervention within 48 working hours following identification of the fault by our experts

## ENVIRONMENTAL PROTECTION


JRI recommends to its customers the disposal of their unusable and/or irreparable measurement and recording materials in a manner compatible with the protection of the environment. As the production of waste materials cannot be avoided, these should be reused through the recycling process best adapted to the considered materials and to the protection of the environment.

### **RoHS Directive**

The RoHS European directive regulates and limits the presence of dangerous substances in electronic and electric equipment (EEE).

All new electronic equipment designed, developed and manufactured by JRI are compliant with the aforementioned Directive 2002/95/CE.



	<p><a href="#">JRI Nano SPY Wireless Mini Data loggers</a> [pdf] User Guide</p> <p>Nano SPY, Wireless Mini Data loggers, Nano SPY Wireless Mini Data loggers, Mini Data loggers, Data loggers</p>
----------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

-  [Personalized Gifts, Favors and More | M&M'S](#)