



# KASTA RSIBH Smart Remote Switch Input Module Instruction Manual

[Home](#) » [KASTA](#) » KASTA RSIBH Smart Remote Switch Input Module Instruction Manual 

## KASTA RSIBH Smart Remote Switch Input Module Instruction Manual



### Contents

- [1 Important Safety Information](#)
- [2 FEATURES](#)
- [3 FUNCTION SETUP](#)
- [4 APP Installation](#)
- [5 APP ENABLED FUNCTION](#)
- [6 TECHNICAL SPECIFICATIONS](#)
- [7 CONNECTION DIAGRAM](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

## Important Safety Information

- This product must be installed by a licensed electrician in accordance with all the requirements of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- Indoor use only. Not suitable for damp or explosive environments.
- Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- No user serviceable parts inside.

## FEATURES

- Mains powered remote switch input module.
- Communicate with and control other KASTA devices.
- Simple 4 wire connection – A, N, S1, S2.
- 2 modes of operation.

### Mode 1: INPUT MODULE

Wirelessly control KASTA devices, groups and scenes when a toggle/latching input such as a PIR sensor is activated. Install in conjunction with a device (e.g. PIR sensor) to S1 terminal for remote control of KASTA devices.

### Mode 1: INPUT MODULE

Wirelessly control KASTA Devices, Groups and Scenes from short press or long press of momentary switch mechanism. Install in conjunction with an appropriately rated momentary action mechanism to S2 terminal.

- Can be paired with KASTA remote switches for multi-way control (8x maximum).
- Smart functions via phone/tablet with the app such as schedules, timers, scenes and groups.
- Built in overvoltage protection.
- To prevent a reduction in Bluetooth signal strength, install away from metal objects.

## FUNCTION SETUP

### S1 CONNECTION

PIR sensor output is transferred to KASTA BLE paired devices for on/off function.

### S2 CONNECTION

#### ON/OFF SWITCH: 1 CLICK

Turns lights on or off. When turned ON, lights will adjust to previous brightness.

#### DIM UP/DOWN: ONE LONG PRESS

When lights are on, long press button to dim up or down. Release button to stop.

#### FULL BRIGHTNESS: 2 CLICKS

Sets lights to full brightness.

#### DELAY TO OFF: 3 CLICKS\*

Lights automatically turn off after set time.

#### SET MIN DIM LEVEL: 4 CLICKS\*

Dim to desired level. Click button 4 times to store setting.

#### RESET MIN DIM LEVEL: 5 CLICKS\*

Restores back to factory minimum dimming level.

#### PAIRING MODE: 6 CLICKS

Enter pairing mode for multi-way dimming. Lights will pulse.

#### FACTORY RESET: 9 CLICKS

Restores all settings back to factory.

If successful, light will pulse the number of times that the switch was clicked, indicating function.

## APP Installation

Visit [www.kasta.com.au](http://www.kasta.com.au) or your app store to download the free KASTA app.

iOS: requires iOS 9.0 or later.

Android: requires Android 4.4 or later.

Devices must support Bluetooth 4.0



## APP ENABLED FUNCTION

RETRIGGER TIMER: 1 CLICK


Enable delay to on/off. Function must be programmed through app first.

## TECHNICAL SPECIFICATIONS


Operating Temp: -20°C to 40°C

Supply: 220-240V AC 50Hz

## CONNECTION DIAGRAM

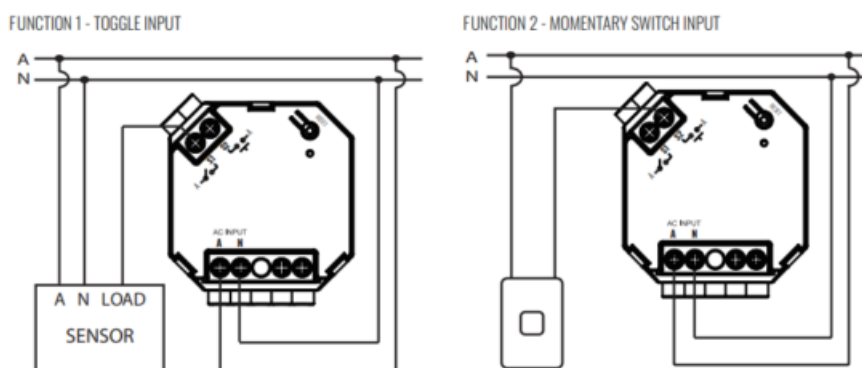

## Documents / Resources

	<a href="#">KASTA RSIBH Smart Remote Switch Input Module</a> [pdf] Instruction Manual RSIBH, Smart Remote Switch Input Module, Switch Input Module, Input Module
---	---

## References

- [KASTA - Living Enhanced](#)
- [KASTA - Living Enhanced](#)